



A32

Dimensions / 尺寸

CH

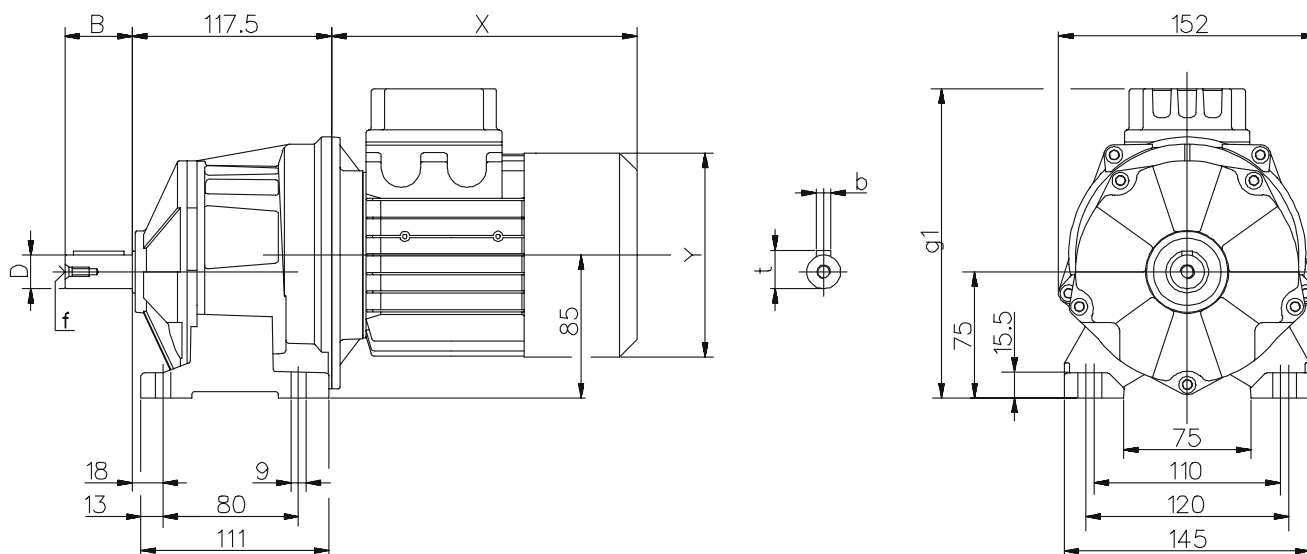

CH...F

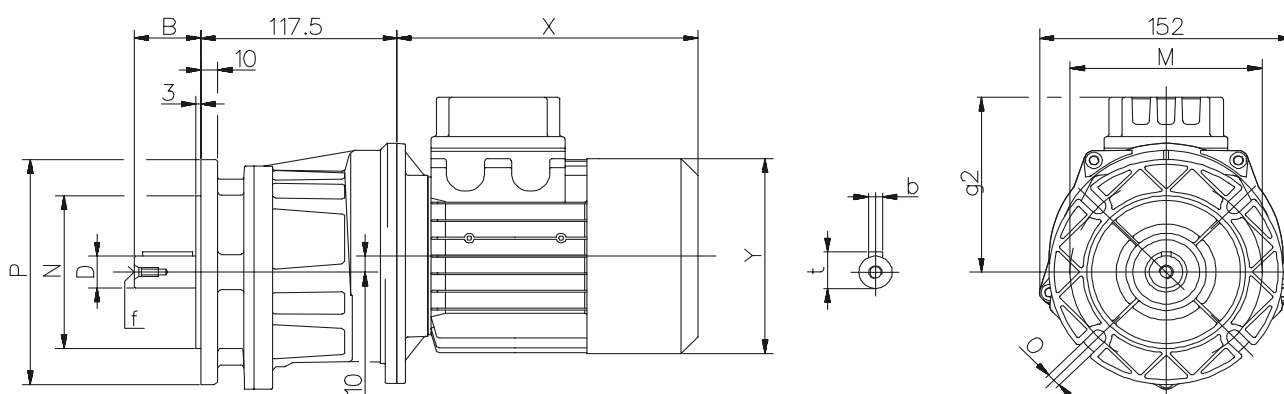

输入轴尺寸

Alberi / Shaft / Wellen / Arbres / Ejes				
D j6	B	b	t	f
20	40	6	22,5	M6
(16)	(40)	(5)	(18)	(M6)
(14)	(30)	(5)	(16)	(M6)


输出法兰尺寸

Flange / Flanges / Flansche / Flasques / Bidas			
P	M	N f8	O
140	115	95	9
(120)	(100)	(80)	(9)
-	-	-	-



A32	配搭标准马达尺寸					配搭刹车马达尺寸				
	g1	g2	X	Y	~ kg	g1	g2	X	Y	~ kg
063	183,5	108,7	178	120,9	7,5	183,5	108,7	237,5	120,9	8,8
071	195,5	120,5	204	138,9	9,3	195,5	120,5	269	138,9	11,2
080	206,5	131,5	221	157,9	13,3	206,5	131,5	294	157,9	16,4

(..) Only on request

(..) 非标产品, 下单时须说明要求



Dimensions / 尺寸

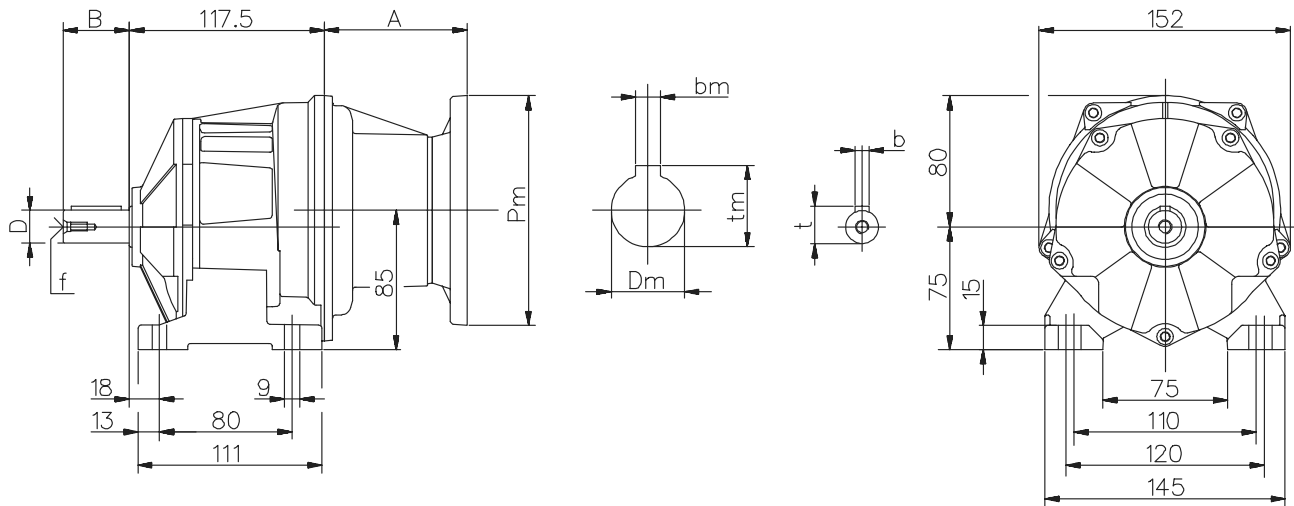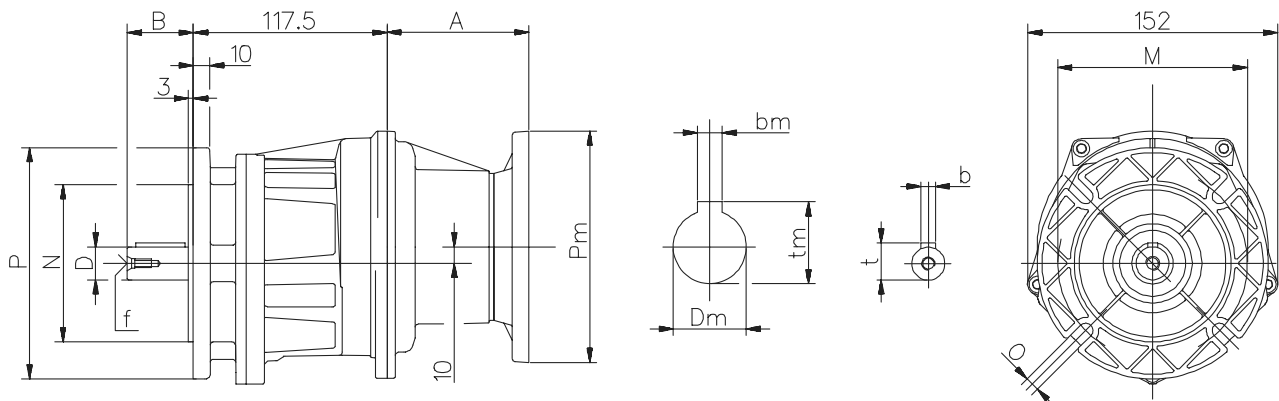A32
H

H...F


输入轴尺寸

Alberi / Shaft / Wellen / Arbres / Ejes				
D j6	B	b	t	f
20	40	6	22,5	M6
(16)	(40)	(5)	(18)	(M6)
(14)	(30)	(5)	(16)	(M6)

输出法兰尺寸

Flange / Flanges / Flansche / Flasques / Bidas			
P	M	N f8	O
140	115	95	9
(120)	(100)	(80)	(9)
-	-	-	-


PAM	A	kg
063	55	4.8
071	55	4.9
080	86	5.2

电机与法兰匹配

- Weight without motor
-重量 (不包括马达)

(..) Only on request
(..) 下单时须说明要求


For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.
有关马达法兰的连接尺寸 (Pm, Dm, bm, tm) 请参考第134页.




A33

Dimensions / 尺寸

CH

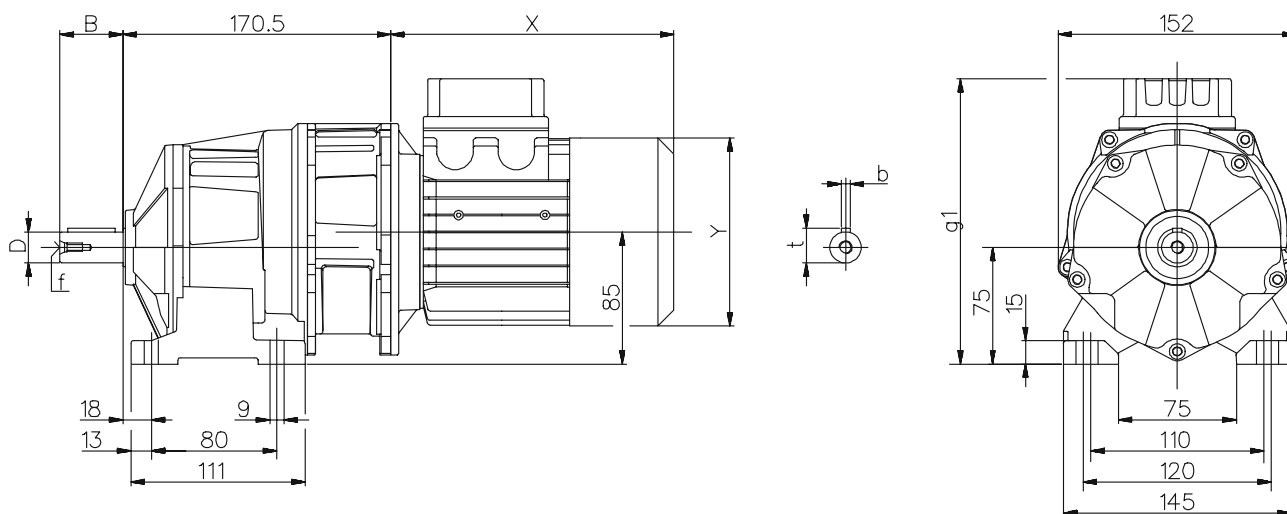

CH...F

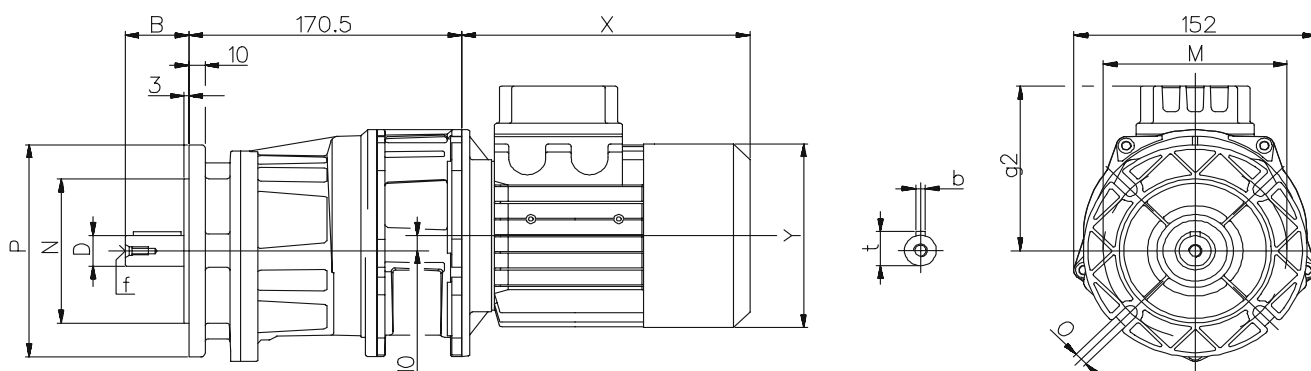

输入轴尺寸

Alberi / Shaft / Wellen / Arbres / Ejes				
D j6	B	b	t	f
20	40	6	22,5	M6
(16)	(40)	(5)	(18)	(M6)
(14)	(30)	(5)	(16)	(M6)

输出法兰尺寸

Flange / Flanges / Flansche / Flasques / Bidas			
P	M	N f8	O
140	115	95	9
(120)	(100)	(80)	(9)
-	-	-	-

A33


搭配标准马达尺寸

搭配刹车马达尺寸



	搭配标准马达尺寸					搭配刹车马达尺寸				
	g1	g2	X	Y	~ kg	g1	g2	X	Y	~ kg
063	183,5	108,7	178	120,9	8,6	183,5	108,7	237,5	120,9	9,9
071	195,5	120,5	204	138,9	10,5	195,5	120,5	269	138,9	12,4
080	206,5	131,5	221	157,9	14,5	206,5	131,5	294	157,9	17,6

(..) Only on request
(..) 下单时须说明要求

- Weight with motor
- 重量 (包括马达)



Dimensions / 尺寸

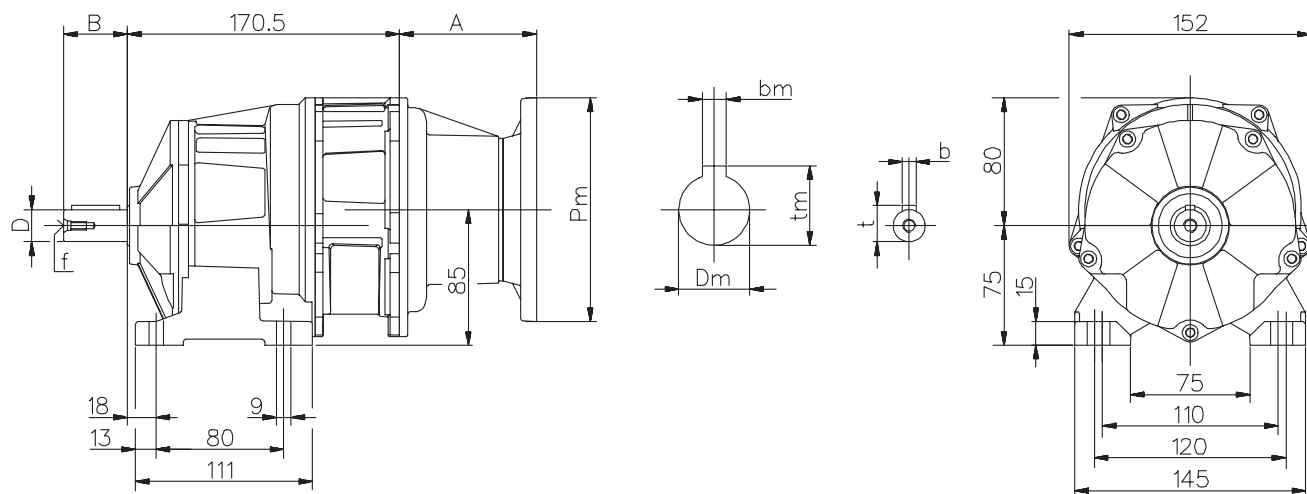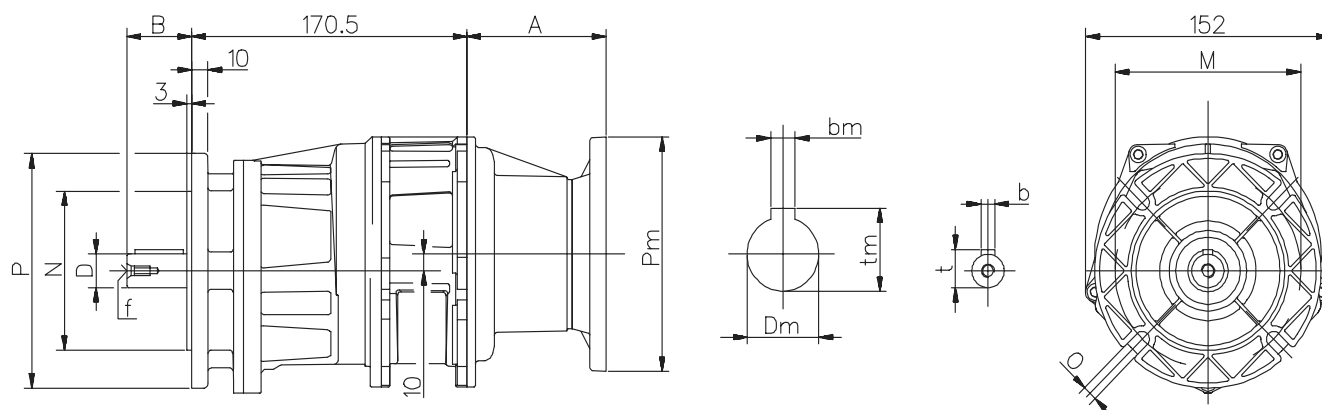A33
H

H...F


输入轴尺寸

Alberi / Shaft / Wellen / Arbres / Ejes				
D j6	B	b	t	f
20	40	6	22.5	M6
(16)	(40)	(5)	(18)	(M6)
(14)	(30)	(5)	(16)	(M6)

PAM	A	kg	电机与法兰配
063	55	5	
071	55	5.1	
080	86	6.2	


输出法兰尺寸

Flange / Flanges / Flansche / Flasques / Bidas			
P	M	N f8	O
140	115	95	9
(120)	(100)	(80)	(9)
-	-	-	-

- Weight without motor
- 重量 (不包括马达)

(..) Only on request
(..) 下单时须说明要求


For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.
有关马达法兰的连接尺寸 (Pm, Dm, bm, tm) 请参考第134页。




A41

Dimensions / 尺寸

CH

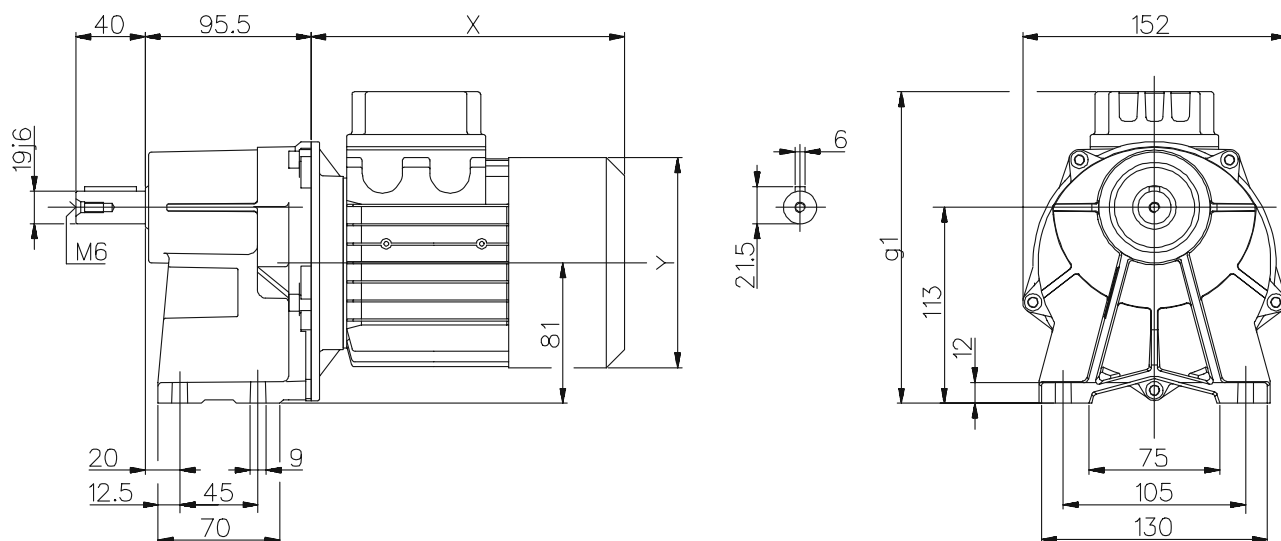


CH...F

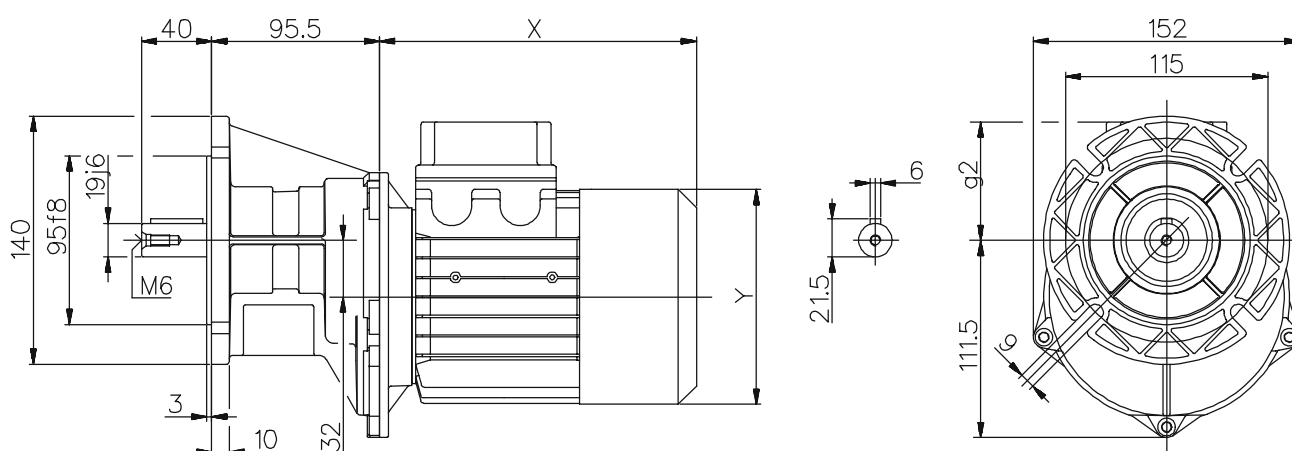



A41	搭配标准马达尺寸					搭配刹车马达尺寸				
	g1	g2	X	Y	~ kg	g1	g2	X	Y	~ kg
063	179,7	66,5	178	120,9	6	179,7	66,5	237,5	120,9	7,3
071	191,5	78,5	204	138,9	7,9	191,5	78,5	269	138,9	9,8
080	202,5	89,5	221	157,9	11,9	202,5	89,5	294	157,9	15

(..) Only on request
(..) 下单时须说明要求

- Weight with motor
- 重量(包括马达)




Dimensions / 尺寸

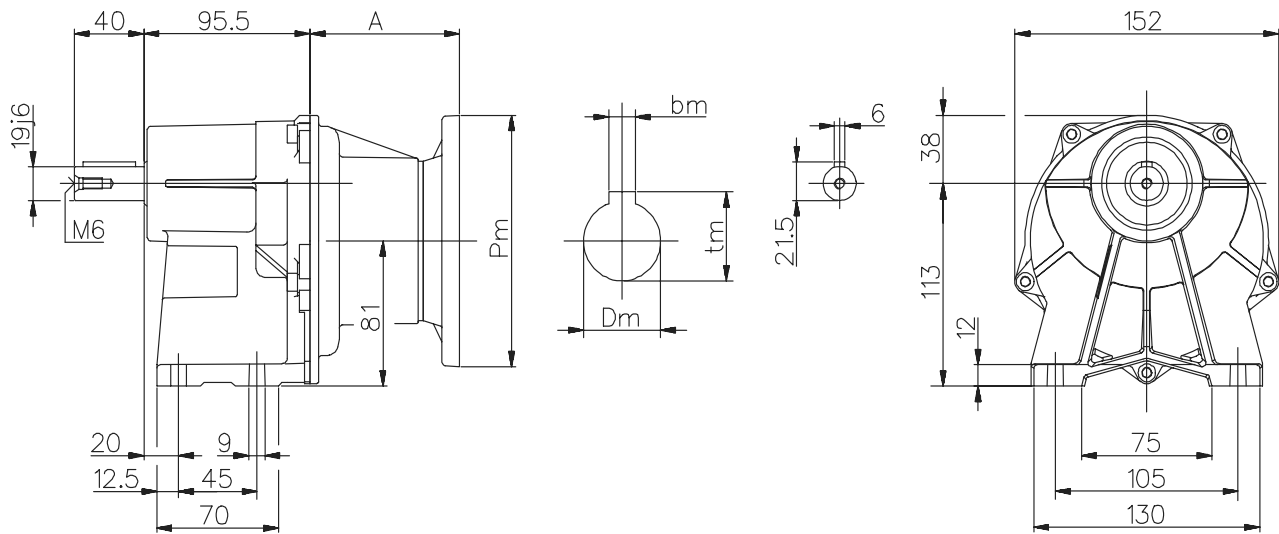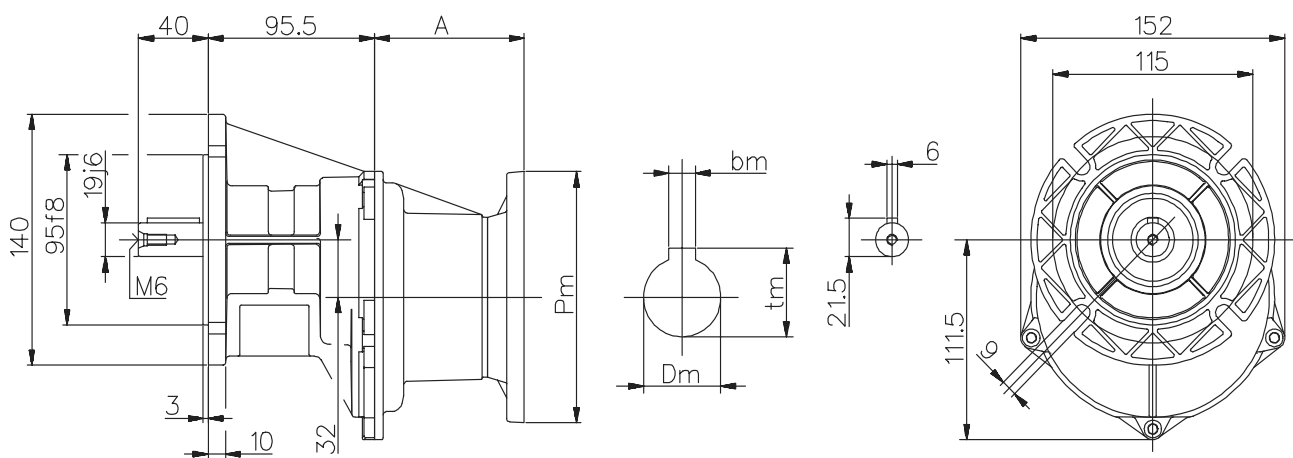A41
H

H...F


PAM	A	kg
063	55	3.3
071	55	3.4
080	86	3.7

- Weight without motor
- 重量 (不包括马达)


For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.
有关马达法兰的连接尺寸 (PM, DM, BM, TM)，请参考第134页。




A42

Dimensions / 尺寸

CH

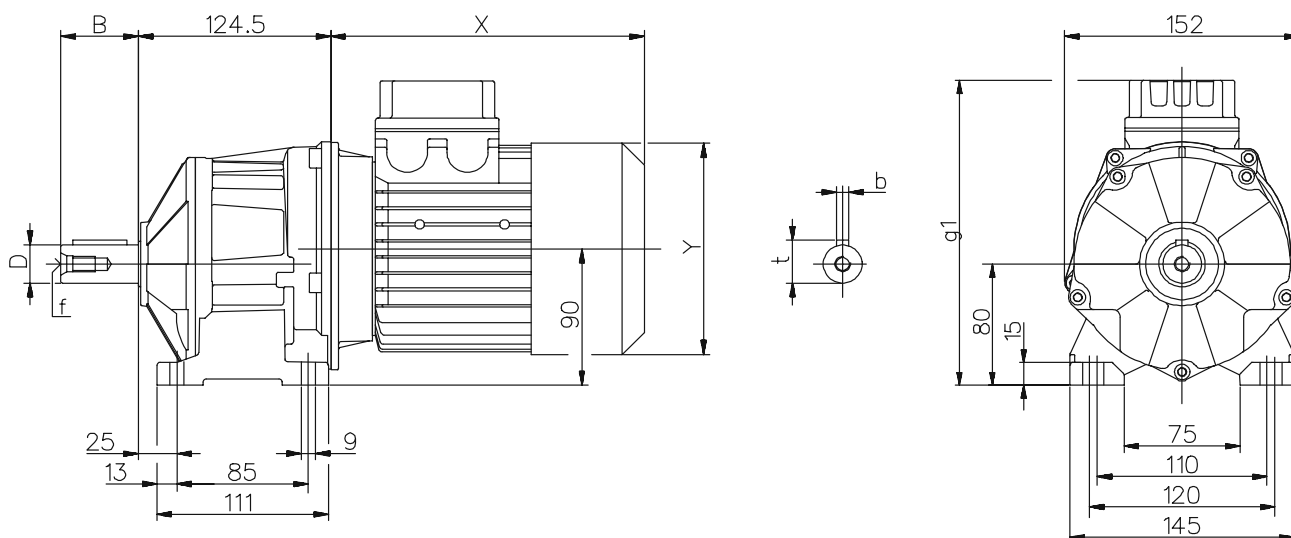

CH...F

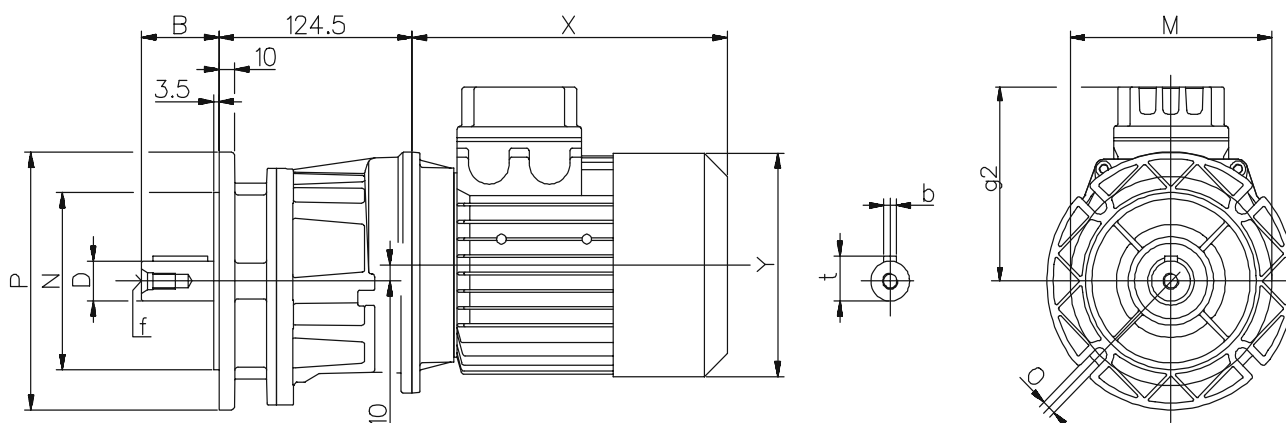

输入轴尺寸

Alberi / Shaft / Wellen / Arbres / Ejes				
D j6	B	b	t	f
25 (19)	50 (40)	8 (6)	28 (21,5)	M10 (M6)


输出法兰尺寸

Flange / Flanges / Flansche / Flasques / Bidas			
P	M	N f8	O
160 (140)	130 (115)	110 (95)	9 (9)



A42	搭配标准马达尺寸					搭配刹车马达尺寸				
	g1	g2	X	Y	~ kg	g1	g2	X	Y	~ kg
063	188,7	108,7	178	120,9	8,4	188,7	108,7	237,5	120,9	9,7
071	200,5	120,5	204	138,9	10,3	200,5	120,5	269	138,9	12,2
080	102,5	131,5	221	157,9	14,3	102,5	131,5	294	157,9	17,4
090s	219,5	139,5	235	172,9	16,2	219,5	139,5	313	172,9	21,1
090l	219,5	139,5	255,5	172,9	18,7	219,5	139,5	333,5	172,9	23,6

(..) Only on request
(..) 下单时须说明要求

- Weight with motor
- 重量 (包括马达)



Dimensions / 尺寸

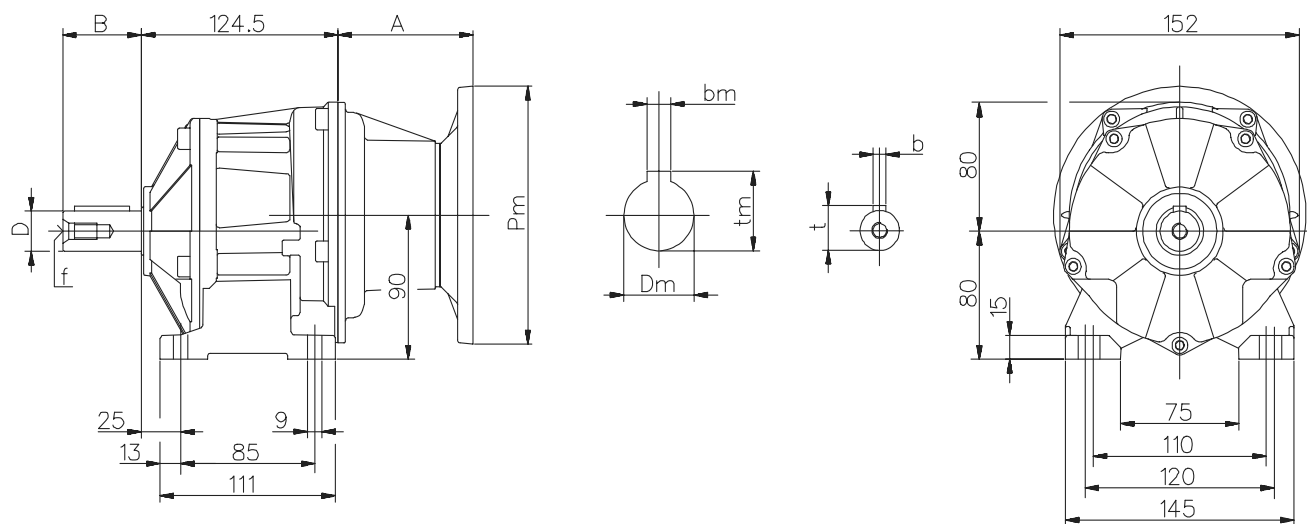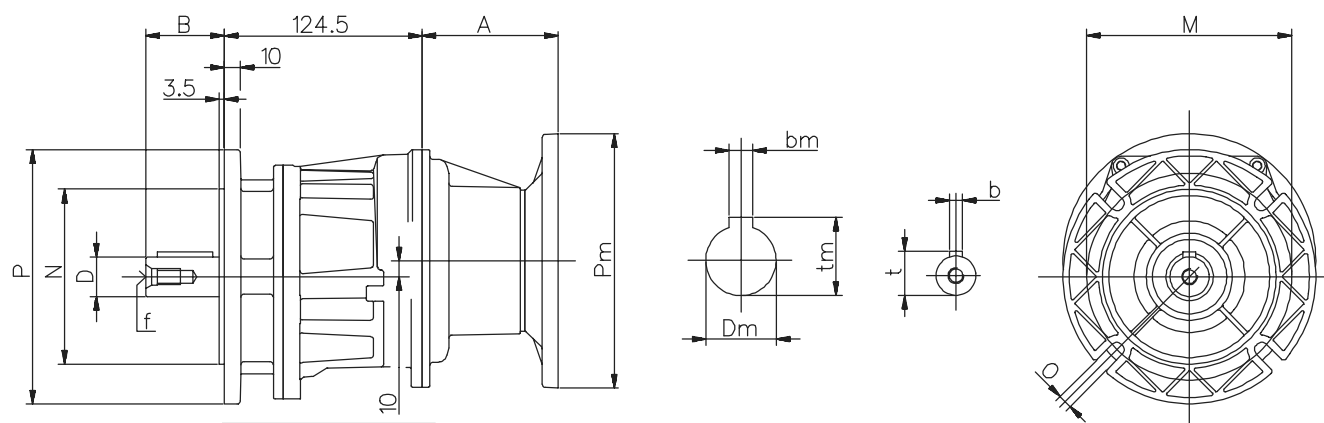A42
H

H...F

输入轴尺寸

Alberi / Shaft / Wellen / Arbres / Ejes				
D j6	B	b	t	f
25	50	8	28	M10
(19)	(40)	(6)	(21,5)	(M6)

输出法兰尺寸


Flange / Flanges / Flansche / Flasques / Bidas			
P	M	N f8	O
160	130	110	9
(140)	(115)	(95)	(9)

PAM	A	kg	电机与法兰配
063	55	5.8	
071	55	5.9	
080 - 090	86	6.1	

- Weight without motor
- 重量 (不包括马达)

(..) Only on request
(..) 下单时须说明要求


For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.
有关马达法兰的连接尺寸(Pm, Dm, bm, tm) 请参考第134页




A43

Dimensions / 尺寸

CH

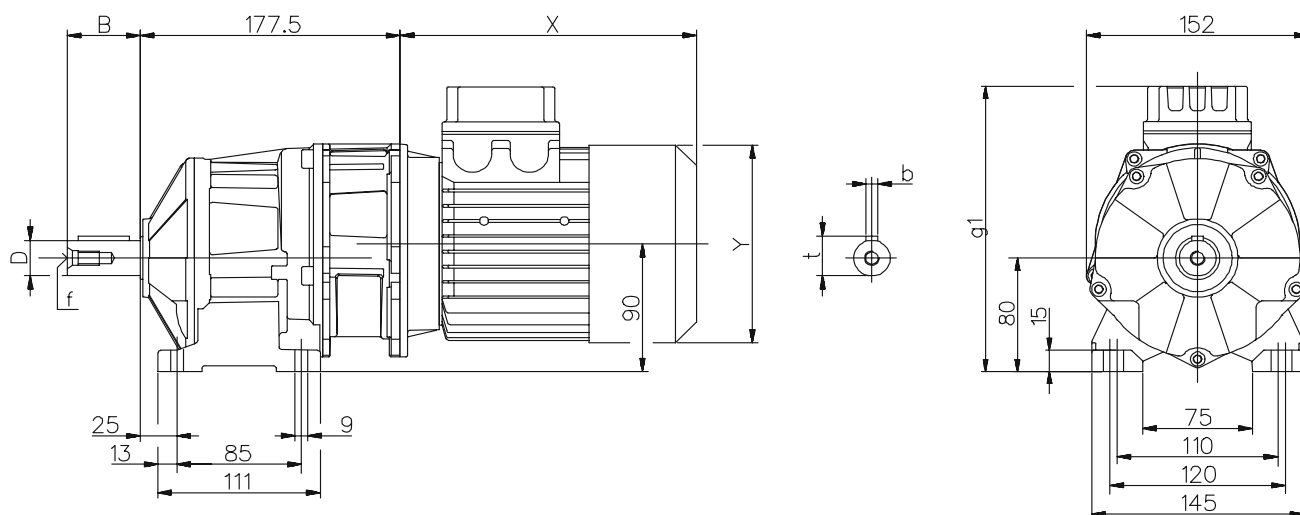

CH...F

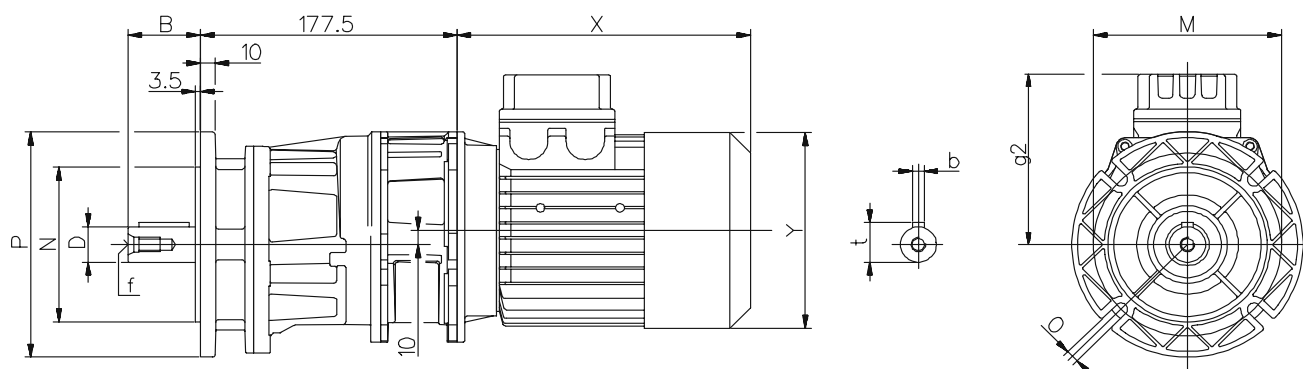

输入轴尺寸

Alberi / Shaft / Wellen / Arbres / Ejes				
D j6	B	b	t	f
25 (19)	50 (40)	8 (6)	28 (21,5)	M10 (M6)


输出法兰尺寸

Flange / Flanges / Flansche / Flasques / Bidas			
P	M	N f8	O
160 (140)	130 (115)	110 (95)	9 (9)



A43	搭配标准马达尺寸					搭配刹车马达尺寸				
	g1	g2	X	Y	~ kg	g1	g2	X	Y	~ kg
063	188,7	108,7	178	120,9	9,4	188,7	108,7	237,5	120,9	10,7
071	200,5	120,5	204	138,9	11,3	200,5	120,5	269	138,9	13,2
080	102,5	131,5	221	157,9	15,3	102,5	131,5	294	157,9	18,4
090s	219,5	139,5	235	172,9	17,2	219,5	139,5	313	172,9	22,1
090l	219,5	139,5	255,5	172,9	19,7	219,5	139,5	333,5	172,9	24,6

(..) Only on request
(..) 下单时须说明要求

- Weight with motor
-重量 (包括马达)



Dimensions / 尺寸

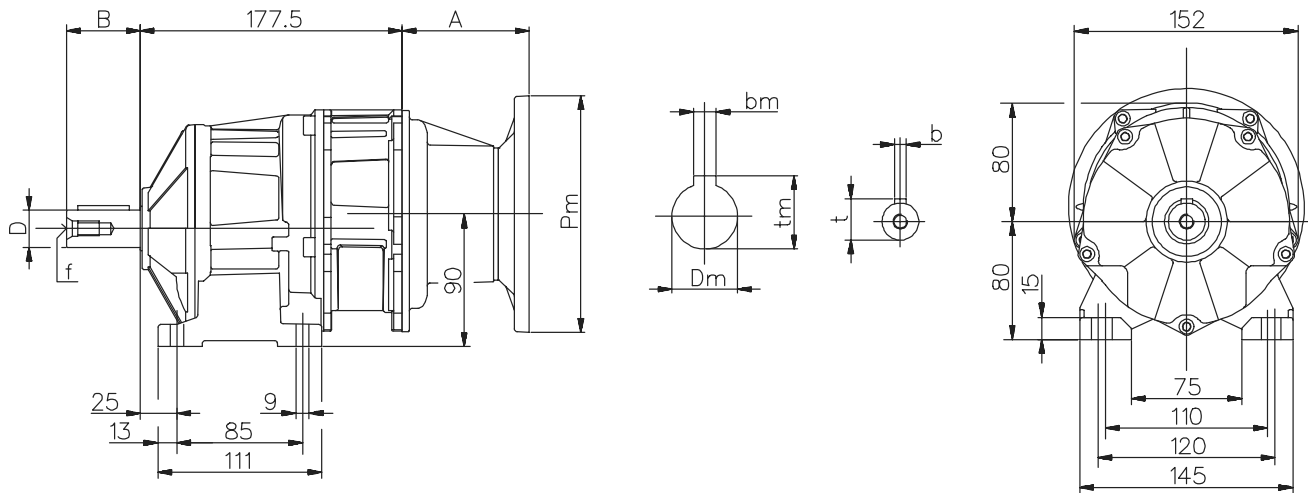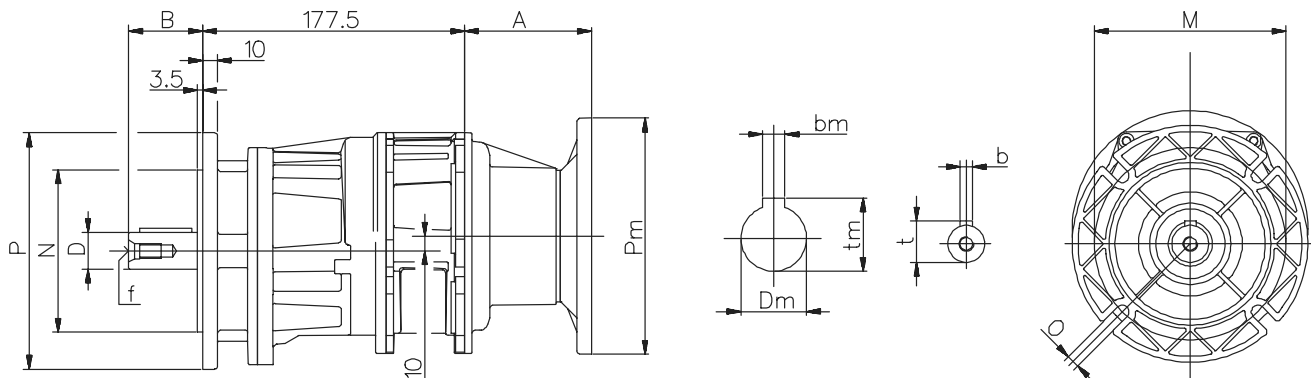A43
H

H...F


输入轴尺寸

Alberi / Shaft / Wellen / Arbres / Ejes				
D j6	B	b	t	f
25	50	8	28	M10
(19)	(40)	(6)	(21,5)	(M6)

输出法兰尺寸


Flange / Flanges / Flansche / Flasques / Bidas			
P	M	N f8	O
160	130	110	9
(140)	(115)	(95)	(9)

PAM	A	kg	电机与法兰配
063	55	6.8	
071	55	6.9	
080 - 090	86	7.1	

- Weight without motor
- 重量 (不包括马达)

(..) Only on request
(..) 下单时须说明要求


For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.
有关马达法兰的连接尺寸(Pm, Dm, bm, tm) 请参考第134页。




A51

Dimensions / 尺寸

CH

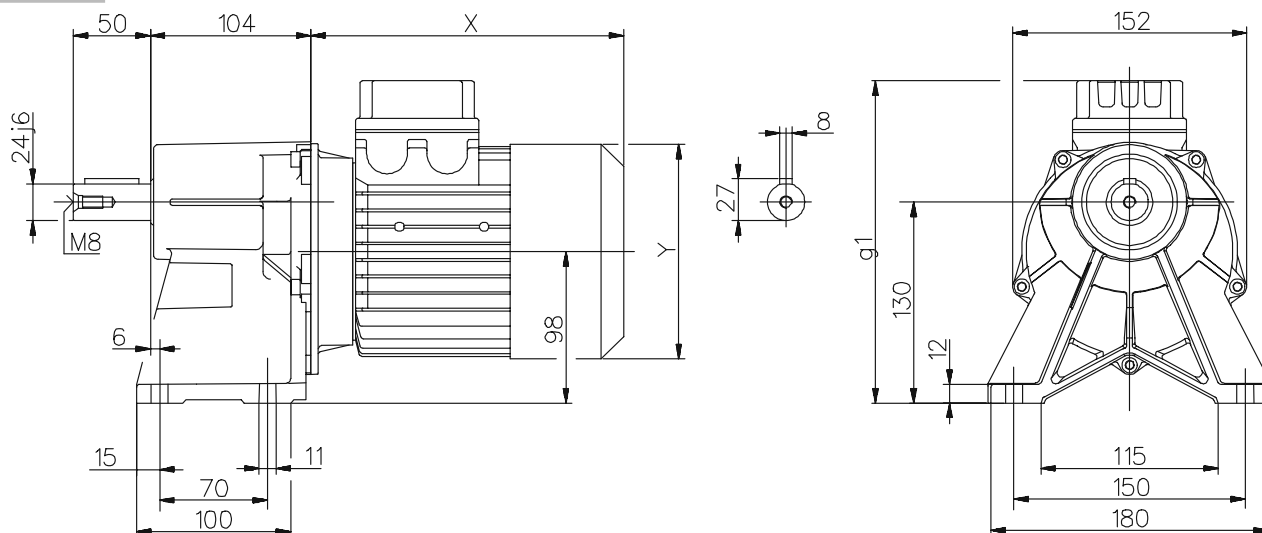


CH...F

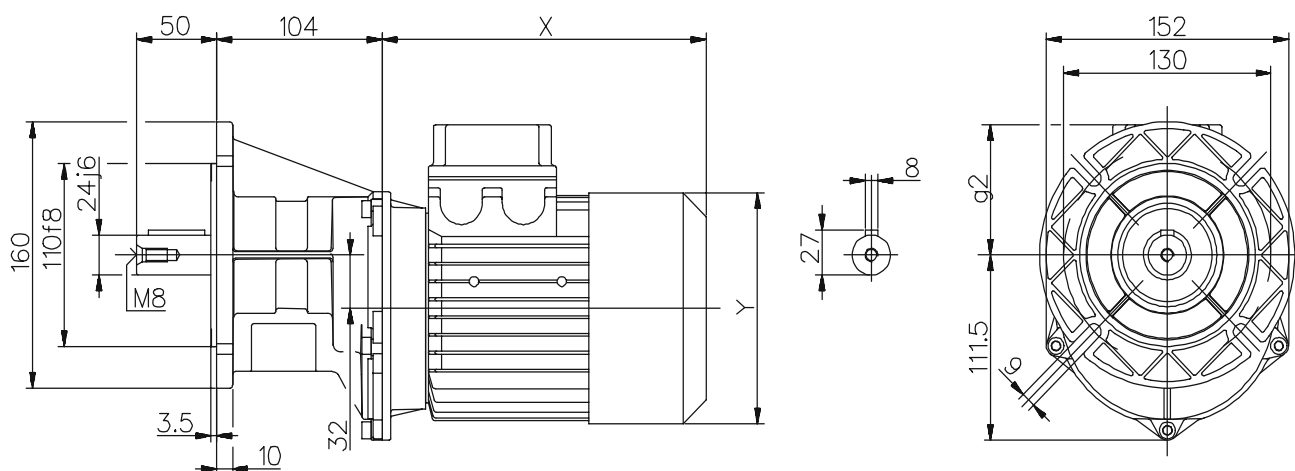



A51	搭配标准马达尺寸					搭配刹车马达尺寸				
	g1	g2	X	Y	~ kg	g1	g2	X	Y	~ kg
063	196,7	66,7	178	120,9	6,4	196,7	66,7	237,5	120,9	7,7
071	208,5	78,5	204	138,9	8,3	208,5	78,5	269	138,9	10,2
080	219,5	89,5	221	157,9	12,3	219,5	89,5	294	157,9	15,4
090s	227,5	97,5	235	172,9	14,2	227,5	97,5	313	172,9	19,1
090l	227,5	97,5	255,5	172,9	16,7	227,5	97,5	333,5	172,9	21,6

(..) Only on request
(..) 下单时须说明要求

- Weight with motor
- 重量 (包括马达)




Dimensions / 尺寸

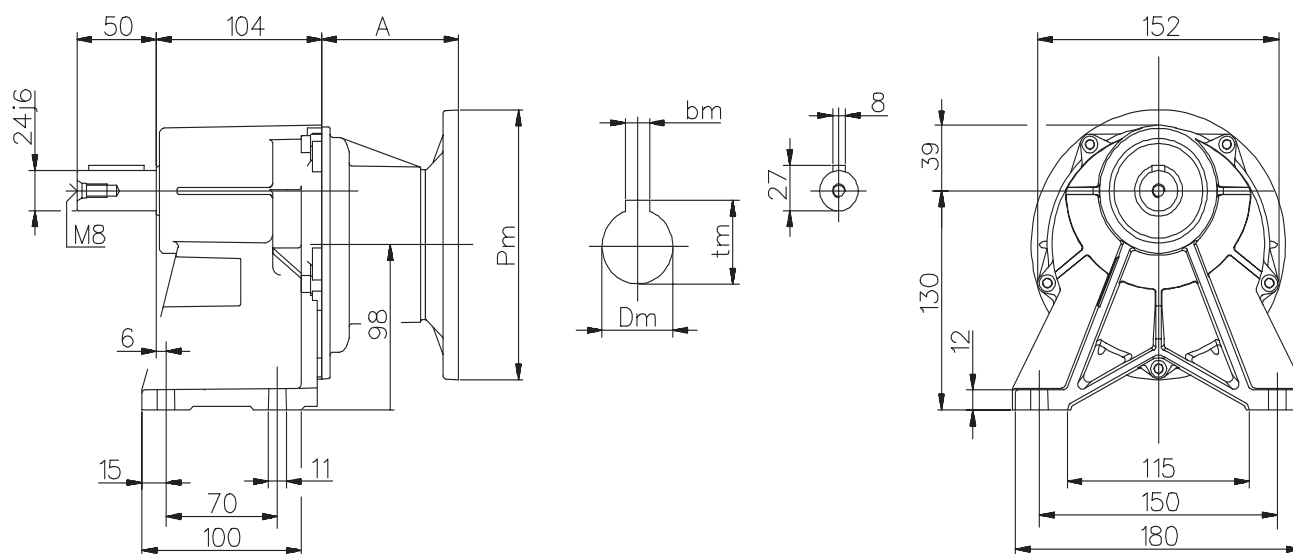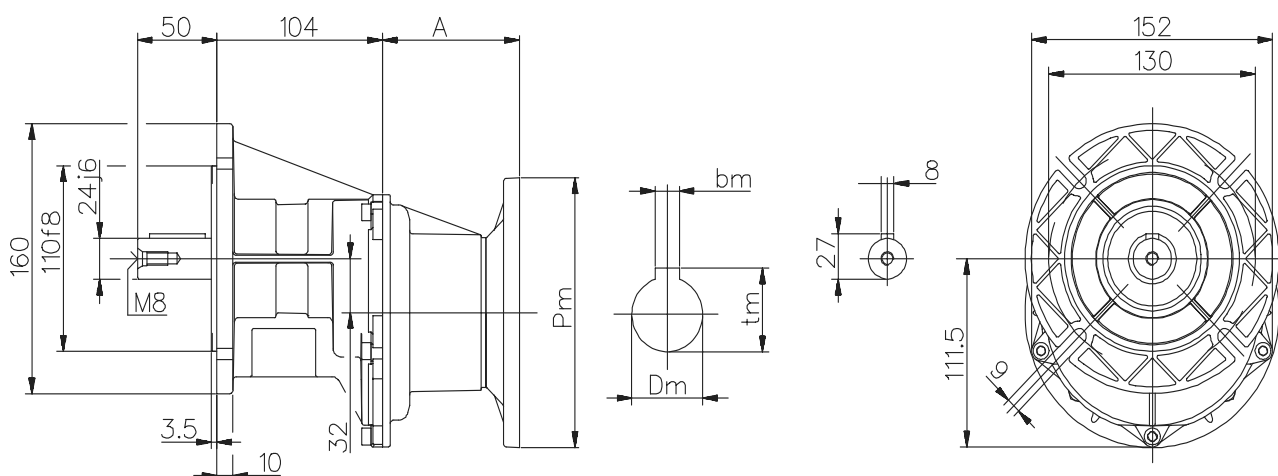A51
H

H...F


PAM	A	kg
063	55	4.4
071	55	4.5
080 - 090	86	4.7

- Weight without motor
- 重量 (不包括马达)


For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.
有关马达法兰的连减尺寸(Pm, Dm, bm, tm) 请参考第134页。




A52

Dimensions / 尺寸

CH

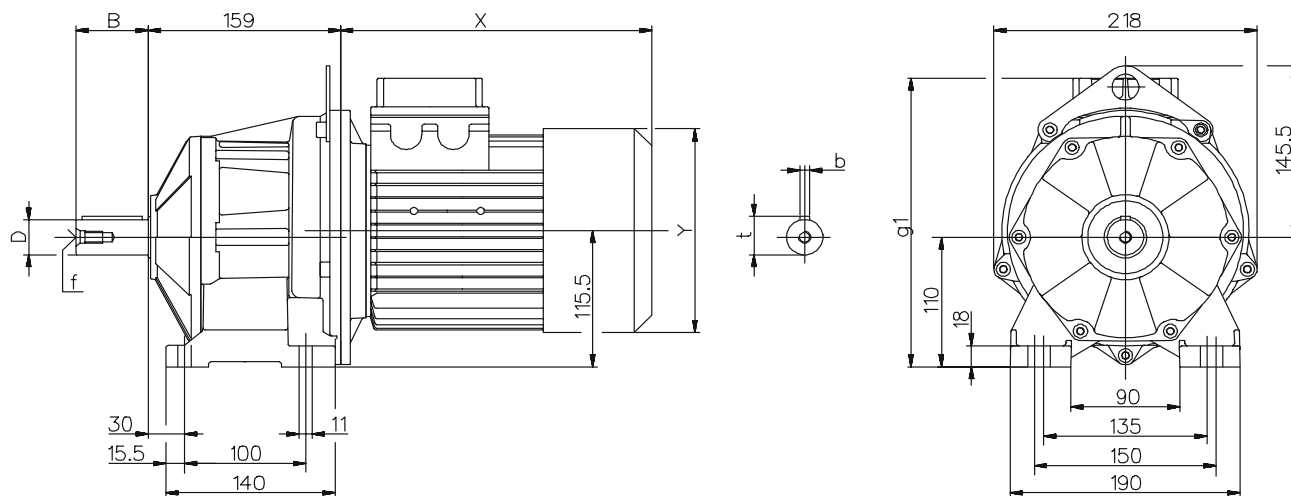

CH...F

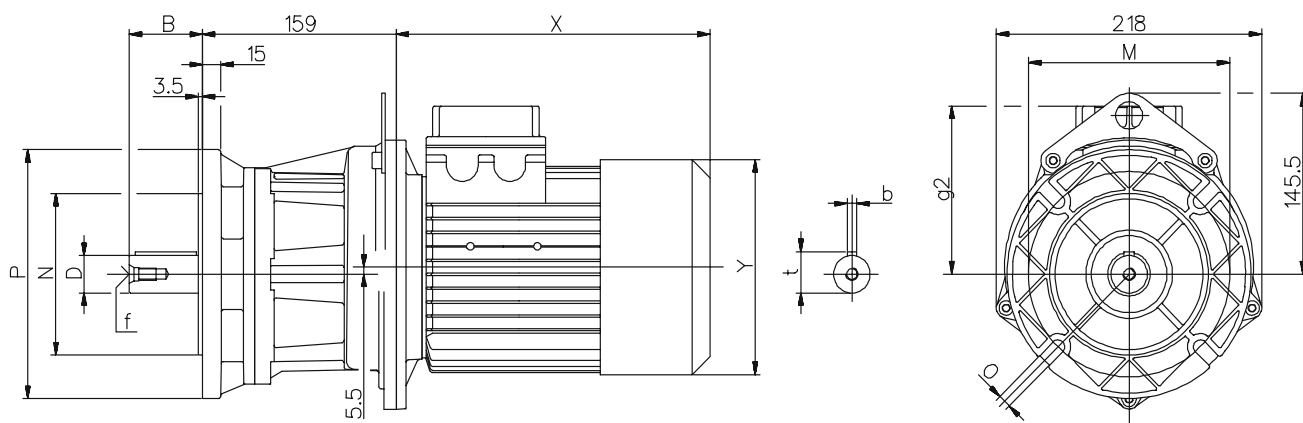

输入轴尺寸

Alberi / Shaft / Wellen / Arbres / Ejes				
D j6	B	b	t	f
30	60	8	33	M10
(35)	(70)	(10)	(38)	(M12)
(24)	(50)	(8)	(27)	(M8)

输出法兰尺寸

Flange / Flanges / Flansche / Flasques / Bidas			
P	M	N f8	O
200	165	130	11
(160)	(130)	(110)	(11)
-	-	-	-

A52


搭配标准马达尺寸

搭配刹车马达尺寸



A52	搭配标准马达尺寸					搭配刹车马达尺寸				
	g1	g2	X	Y	~ kg	g1	g2	X	Y	~ kg
080	237	127	221	157,9	18,3	237	127	294	157,9	21,4
090s	245	135	235	172,9	20,2	245	135	313	172,9	25,1
090l	245	135	255,5	172,9	22,7	245	135	333,5	172,9	27,6
100	254	144	289,5	190,9	27,3	254	144	371	190,9	32,2
112	265	155	302,5	210,4	37,6	265	155	398	210,4	45,9

(..) Only on request
(..) 下单时须说明要求

- Weight with motor
- 重量 (包括马达)



Dimensions / 尺寸

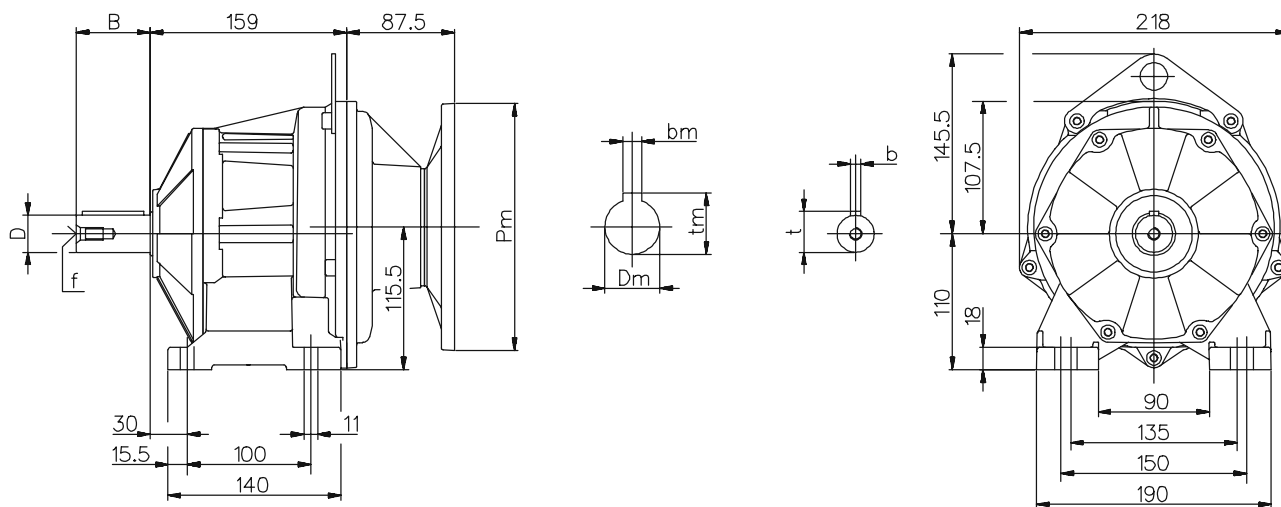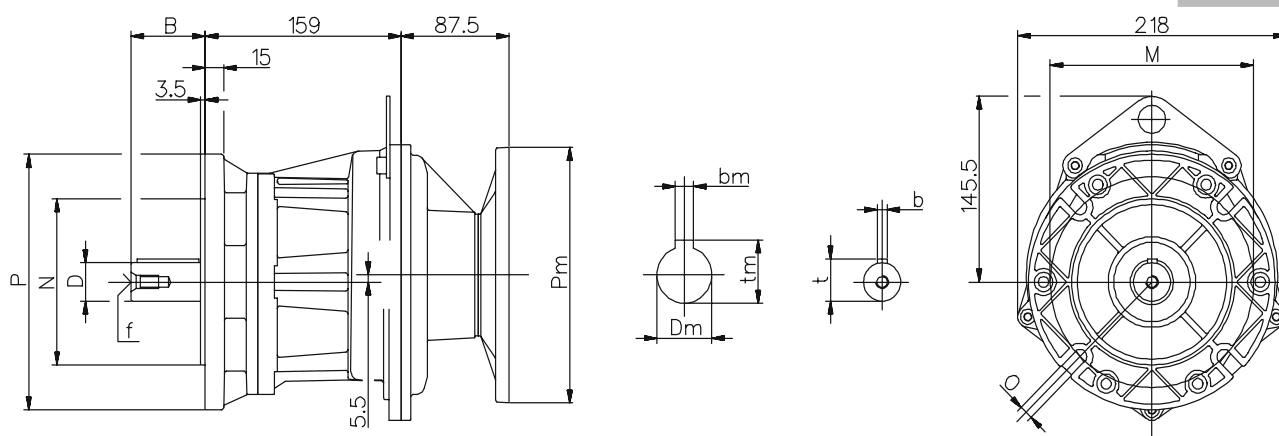A52
H

H...F


输入轴尺寸

Alberi / Shaft / Wellen / Arbres / Ejes				
D j6	B	b	t	f
30	60	8	33	M10
(35)	(70)	(10)	(38)	(M12)
(24)	(50)	(8)	(27)	(M8)

PAM	~ kg
080 - 090	10,6
100 - 112	18,2


输出法兰尺寸

Flange / Flanges / Flansche / Flasques / Bidas			
P	M	N f8	O
200	165	130	11
(160)	(130)	(110)	(11)
-	-	-	-

- Weight without motor
- 重量 (不包括马达)

(..) Only on request
(..) 下单时须说明要求


For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.
有关马达法兰的连接尺寸(Pm, Dm, bm, tm) 请参考134页。




A53

Dimensions / 尺寸

CH

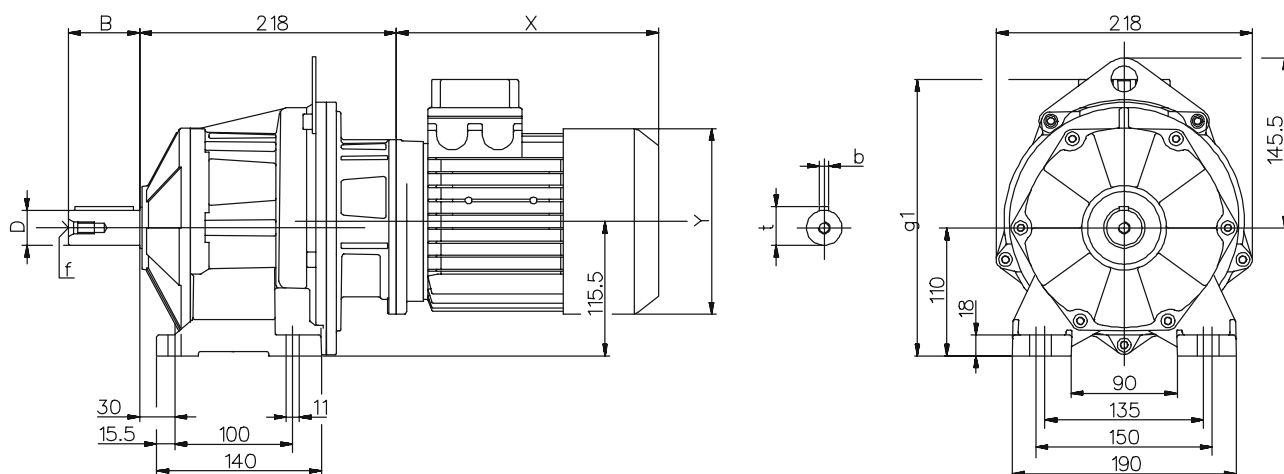

CH...F

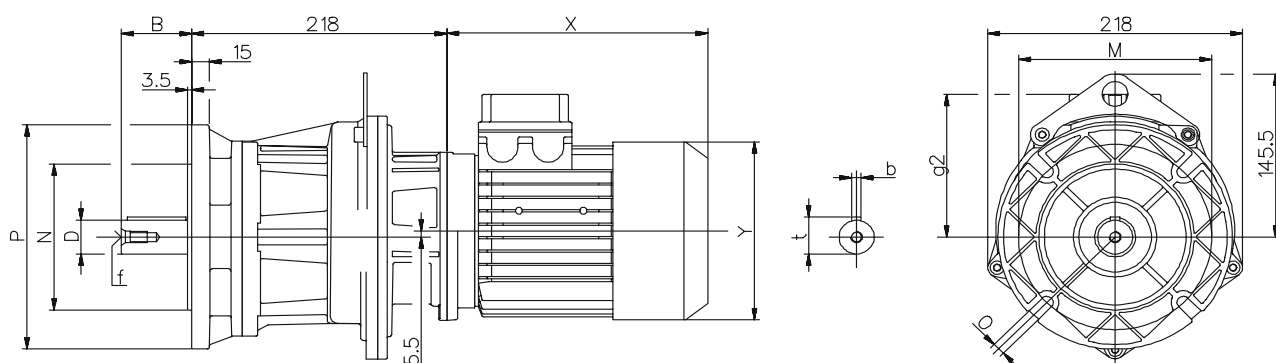

输入轴尺寸

Alberi / Shaft / Wellen / Arbres / Ejes				
D j6	B	b	t	f
30	60	8	33	M10
(35)	(70)	(10)	(38)	(M12)
(24)	(50)	(8)	(27)	(M8)

输出法兰尺寸

Flange / Flanges / Flansche / Flasques / Bidas			
P	M	N f8	O
200	165	130	11
(160)	(130)	(110)	(11)
-	-	-	-

A53


搭配标准马达尺寸

搭配刹车马达尺寸



A53	搭配标准马达尺寸					搭配刹车马达尺寸				
	g1	g2	X	Y	~ kg	g1	g2	X	Y	~ kg
063	214,2	104,2	178	120,9	13,7	214,2	104,2	237,5	120,9	15
071	226	116	204	138,9	15,6	226	116	269	138,9	17,5
080	237	127	221	157,9	19,6	237	127	294	157,9	22,7
090s	245	135	235	172,9	21,5	245	135	313	172,9	26,4
090l	245	135	255,5	172,9	24	245	135	333,5	172,9	28,9

(..) Only on request
(..) 下单时须说明要求

- Weight with motor
- 重量 (包括马达)



Dimensions / 尺寸

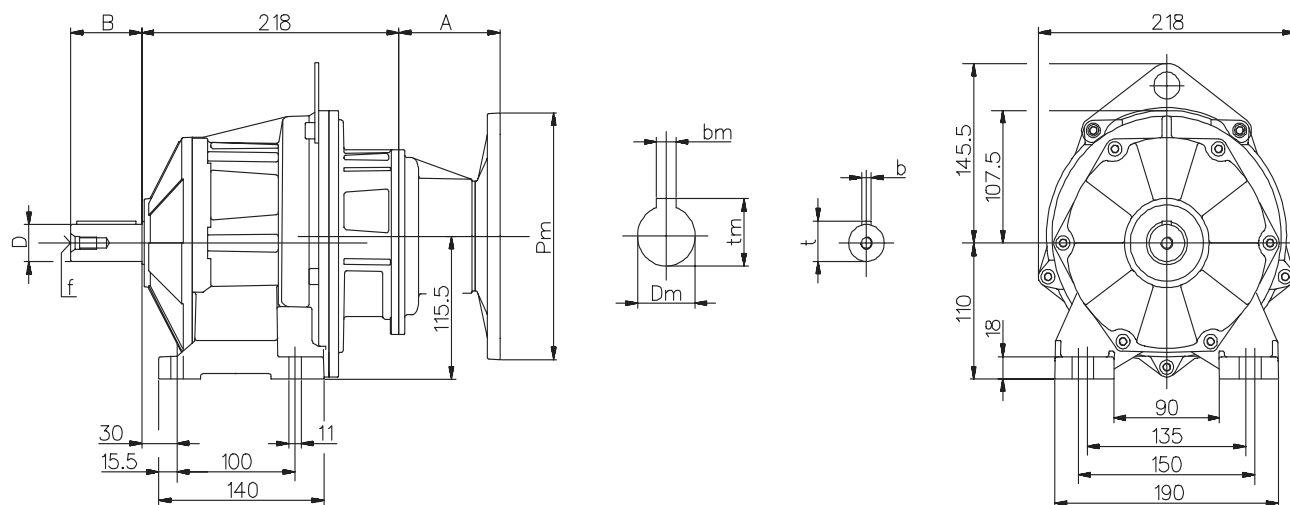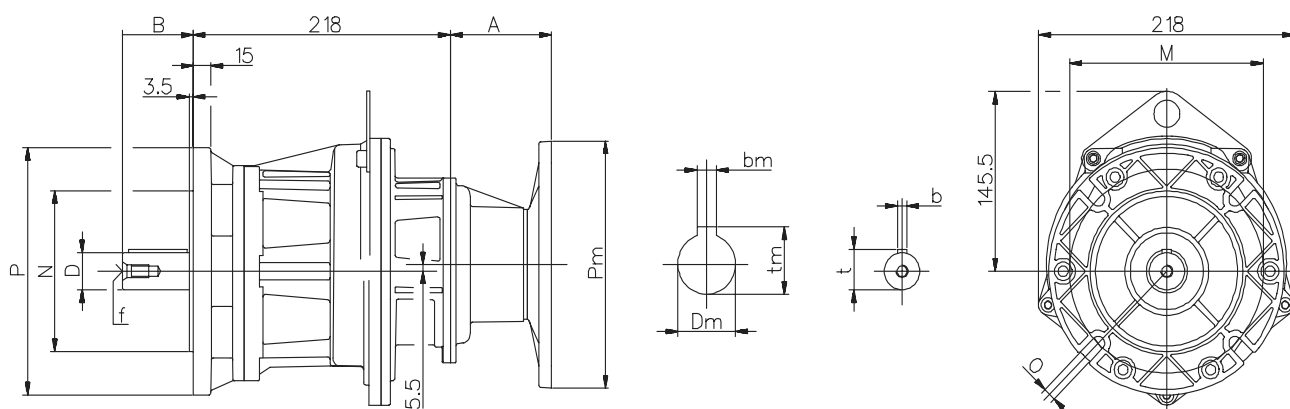A53
H

H...F


输入轴尺寸

Alberi / Shaft / Wellen / Arbres / Ejes				
D j6	B	b	t	f
30	60	8	33	M10
(35)	(70)	(10)	(38)	(M12)
(24)	(50)	(8)	(27)	(M8)

PAM	A	kg
063	55	11.6
071	55	11.7
080 - 090	86	11.9


输出法兰尺寸

Flange / Flanges / Flansche / Flasques / Bidas			
P	M	N f8	O
200	165	130	11
(160)	(130)	(110)	(11)
-	-	-	-

- Weight without motor
- 重量 (不包括马达)

(..) Only on request
(..) 下单时须说明要求


For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.
有关马达法兰的连减尺寸(Pm, Dm, bm, tm) 请参第134页。




A61

Dimensions / 尺寸

CH

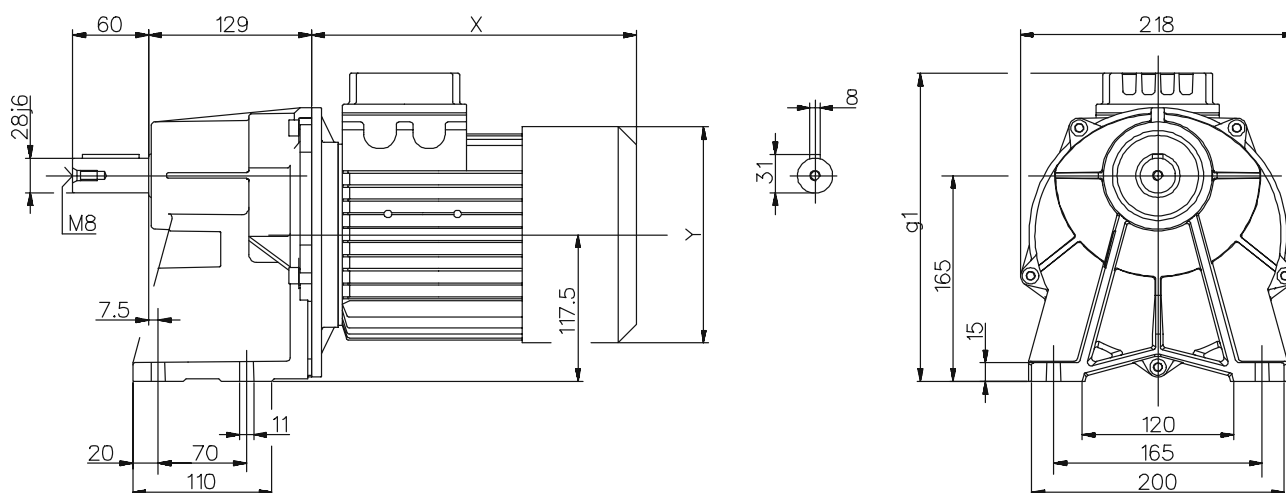


CH...F

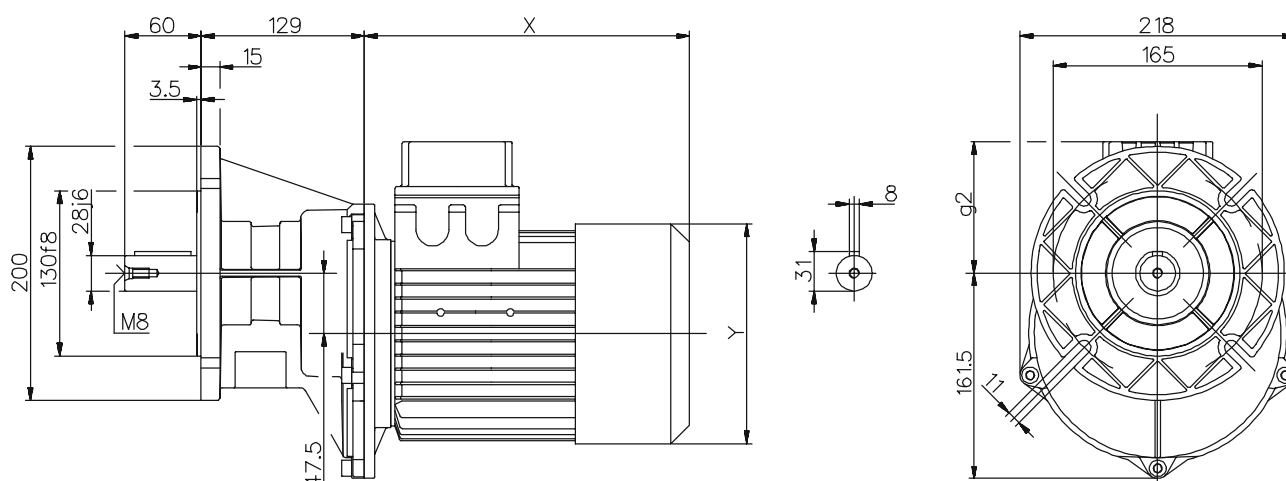



A61	搭配标准马达尺寸					搭配刹车马达尺寸				
	g1	g2	X	Y	~ kg	g1	g2	X	Y	~ kg
080	239	169	221	157,9	14,9	239	169	294	157,9	18
090s	247	177	235	172,9	16,8	247	177	313	172,9	21,7
090l	247	177	255,5	172,9	19,3	247	177	333,5	172,9	24,2
100	256	186	289,5	190,9	23,9	256	186	371	190,9	28,8
112	267	197	302,5	210,4	34,2	267	197	398	210,4	42,5

(..) Only on request
(..) 下单时须说明要求

- Weight with motor
- 重量 (包括马达)




Dimensions / 尺寸

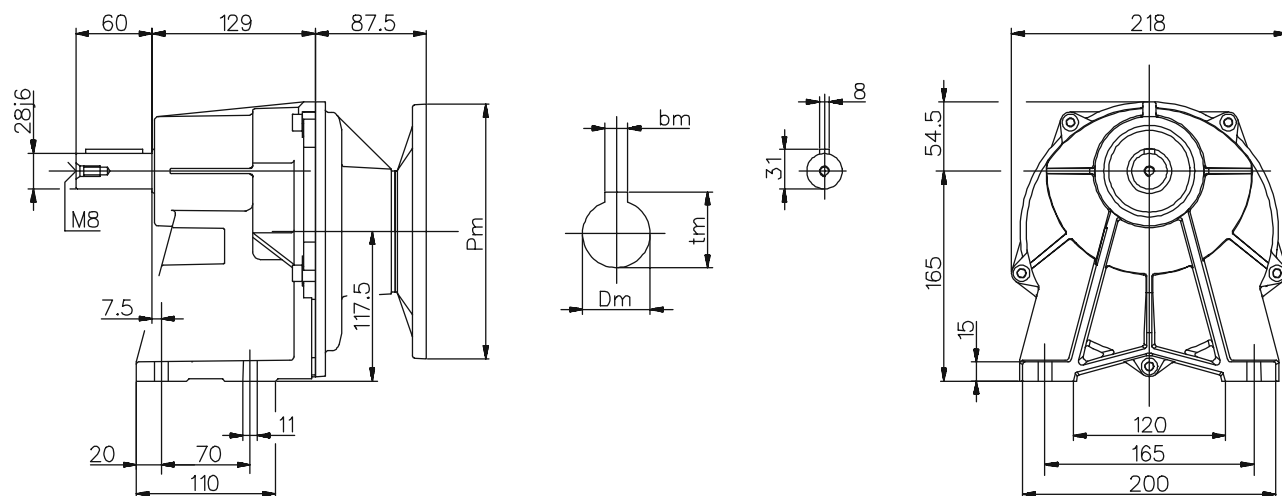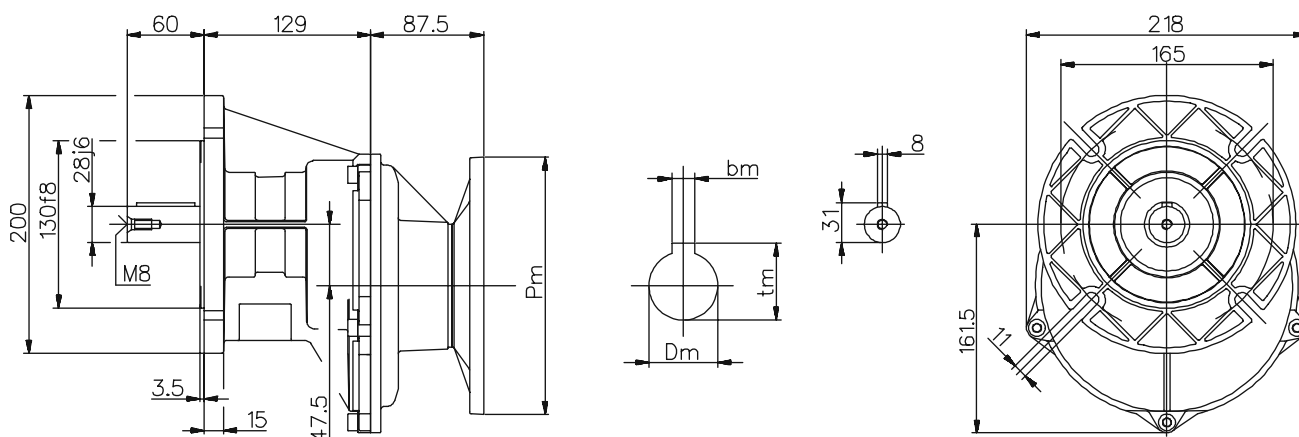A61
H

H...F


PAM	~ kg
080 - 090	7,2
100 - 112	7,6

- Weight without motor
- 重量 (不包括马达)


For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.
有关马达法兰的连接尺寸 (Pm, Dm, bm, tm) 请参考第134页。




A62

Dimensions / 尺寸

CH

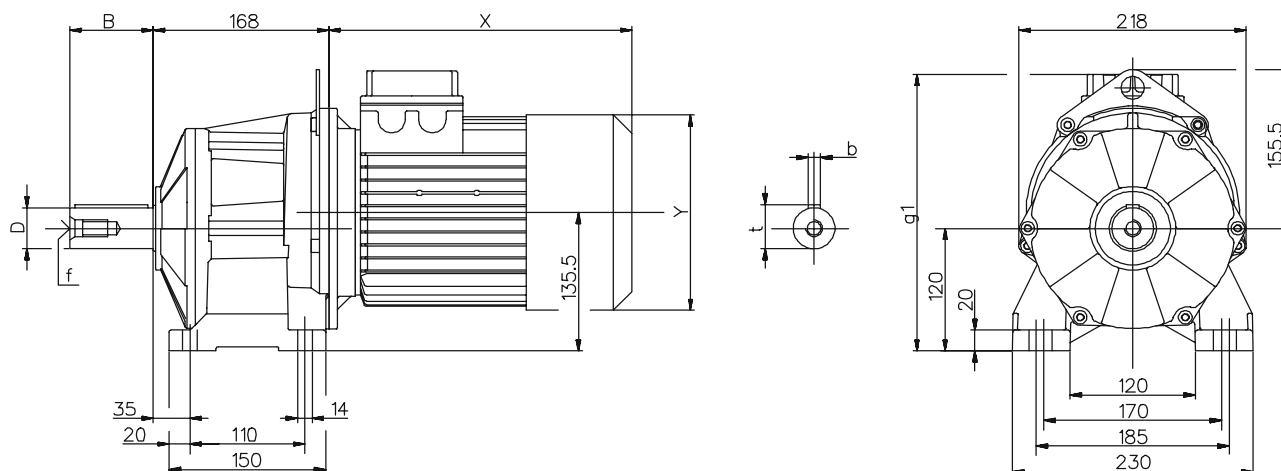

CH...F

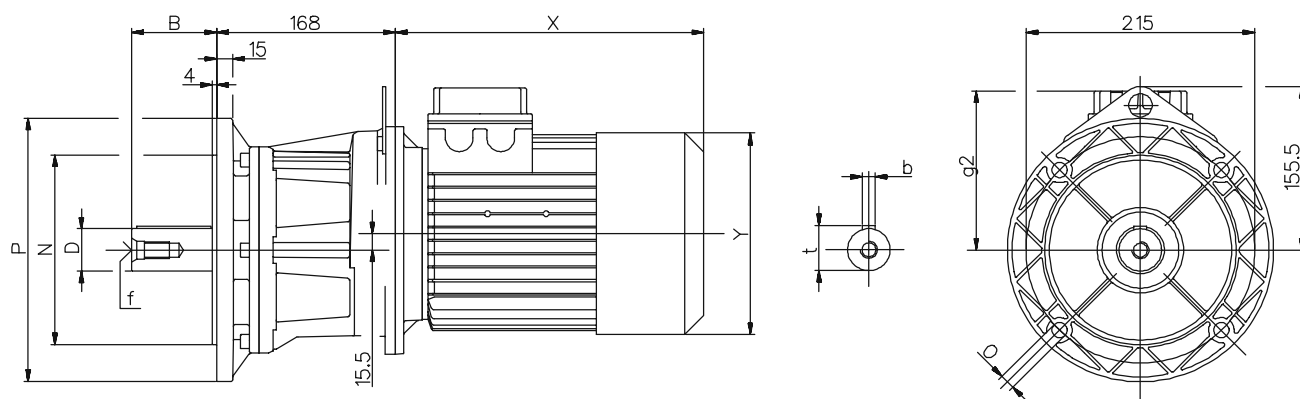

输入轴尺寸

Alberi / Shaft / Wellen / Arbres / Ejes				
D j6	B	b	t	f
40	80	12	43	M16
(28)	(60)	(8)	(31)	(M10)


输出法兰尺寸

Flange / Flanges / Flansche / Flasques / Bidas			
P	M	N f8	O
250	215	180	14
(200)	(165)	(130)	(14)



A62	搭配标准马达尺寸					搭配刹车马达尺寸				
	g1	g2	X	Y	~ kg	g1	g2	X	Y	~ kg
080	257	137	221	157,9	20,9	257	137	294	157,9	24
090s	265	145	235	172,9	22,8	265	145	313	172,9	27,7
090l	265	145	255,5	172,9	25,3	265	145	333,5	172,9	30,2
100	274	154	289,5	190,9	29,9	274	154	371	190,9	34,8
112	285	165	302,5	210,4	40,2	285	165	398	210,4	48,5

(..) Only on request
(..) 下单时须说明要求

- Weight with motor
- 重量 (包括马达)



Dimensions / 尺寸

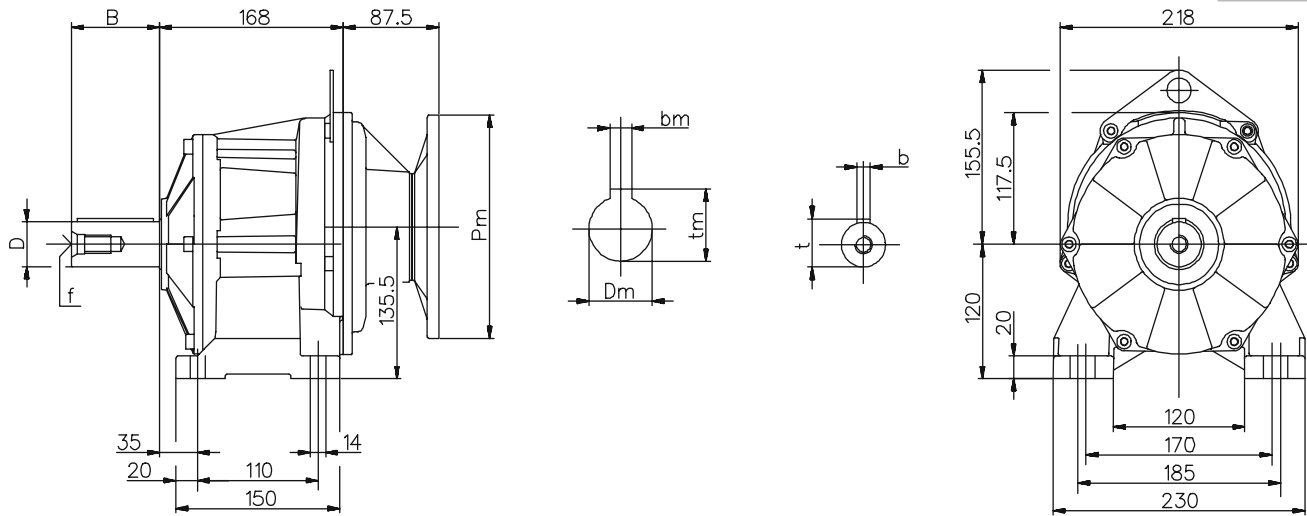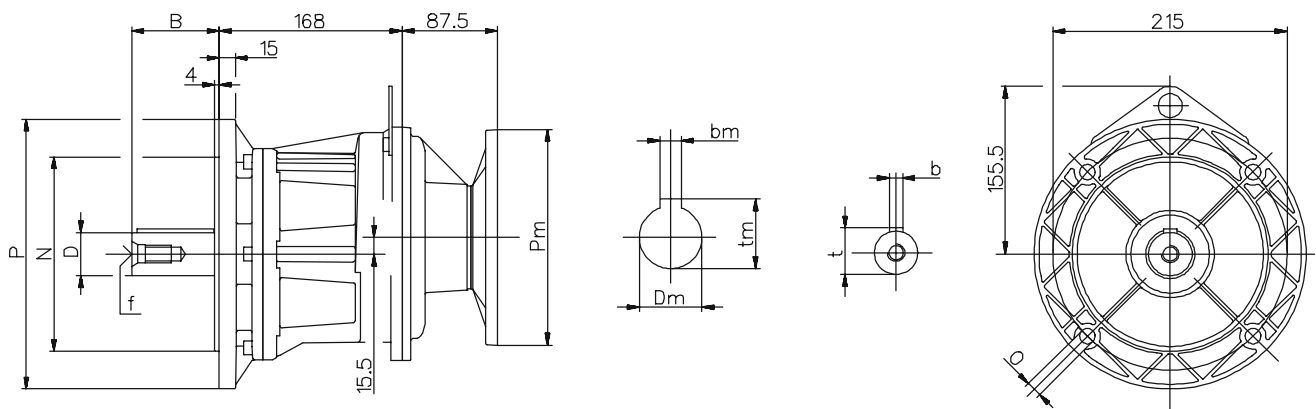A62
H

H...F


输入轴尺寸

Alberi / Shaft / Wellen / Arbres / Ejes				
D j6	B	b	t	f
40	80	12	43	M16
(28)	(60)	(8)	(31)	(M10)

输出法兰尺寸


Flange / Flanges / Flansche / Flasques / Bidas			
P	M	N f8	O
250	215	180	14
(200)	(165)	(130)	(14)

PAM	~ kg
080 - 090	13
100 - 112	16,5

- Weight without motor
-重量 (不包括马达)

(...) Only on request
(..) 下单时须注明机别要求


For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.
有关马达法兰的连接尺寸(Pm, Dm, bm, tm) 请参考第134页。




A63

Dimensions / 尺寸

CH

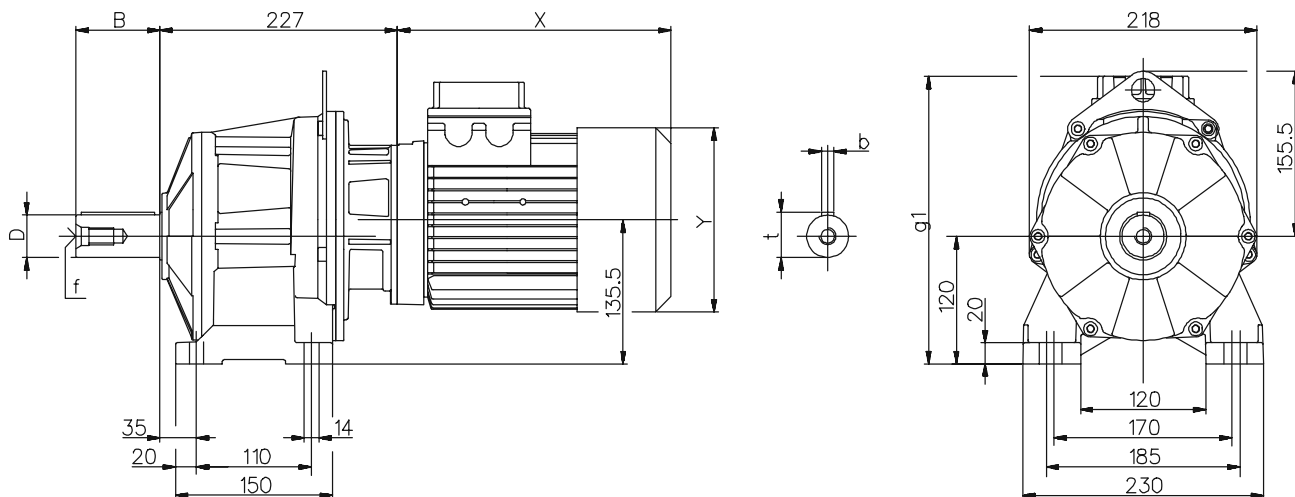

CH...F

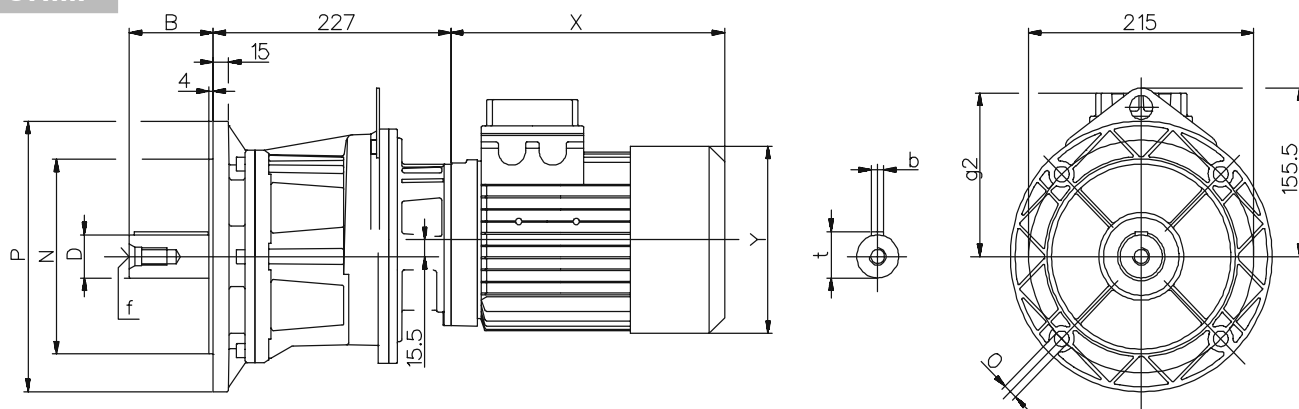

输入轴尺寸

Alberi / Shaft / Wellen / Arbres / Ejes

D j6	B	b	t	f
40	80	12	43	M16
(28)	(60)	(8)	(31)	(M10)

输出法兰尺寸

Flange / Flanges / Flansche / Flasques / Bidas

P	M	N f8	O
250	215	180	14
(200)	(165)	(130)	(14)


A63	搭配标准马达尺寸					搭配刹车马达尺寸				
	g1	g2	X	Y	~ kg	g1	g2	X	Y	~ kg
063	234,2	114,2	178	120,9	16,7	234,2	114,2	237,5	120,9	18
071	246	126	204	138,9	18,6	246	126	269	138,9	20,5
080	257	137	221	157,9	22,6	257	137	294	157,9	25,7
090s	265	145	235	172,9	24,5	265	145	313	172,9	29,4
090l	265	145	255,5	172,9	27	265	145	333,5	172,9	31,9

(..) Only on request



(..) 下单时须注明机别要求

- Weight with motor

- 重量 (包括马达)



Dimensions / 尺寸

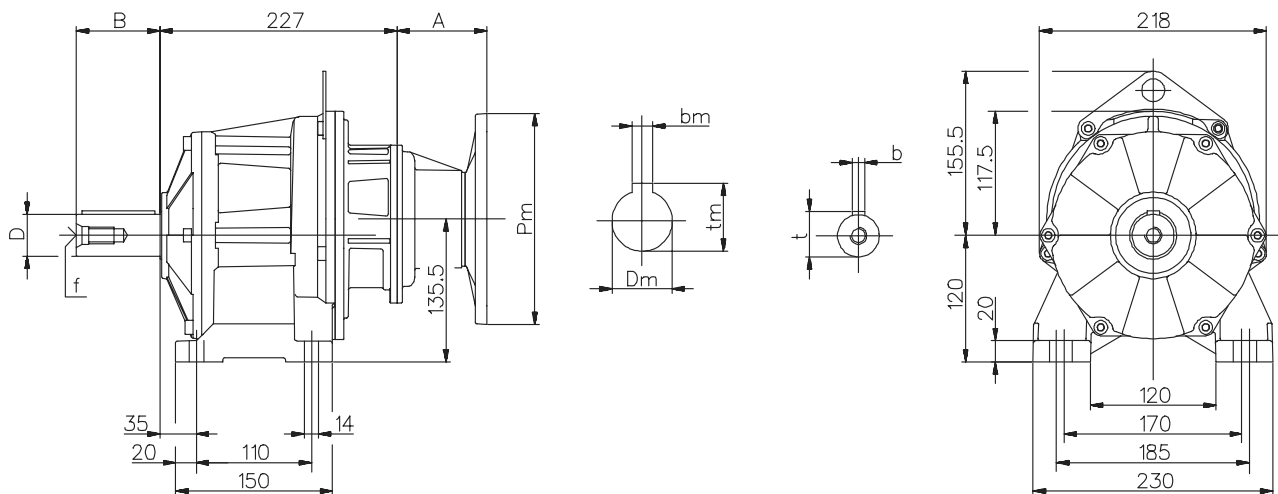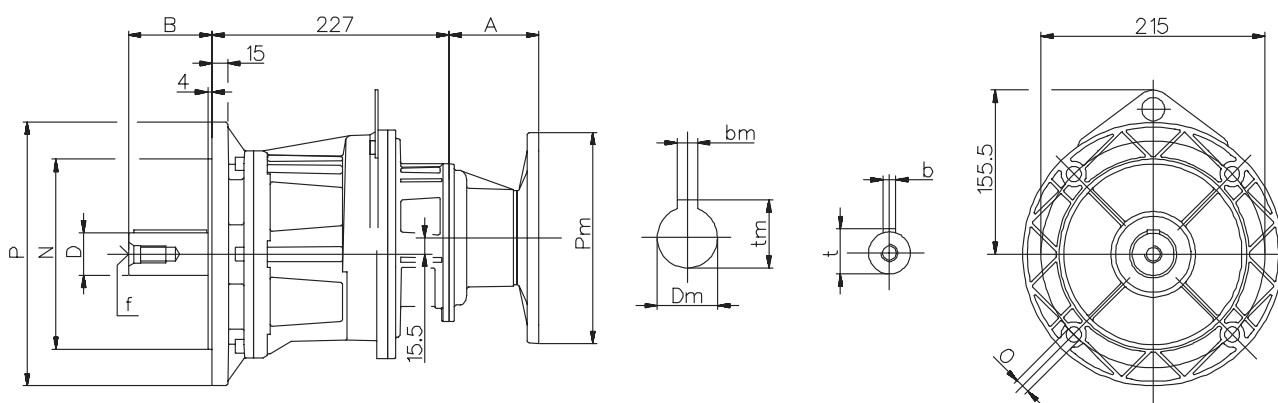A63
H

H...F


输入轴尺寸

Alberi / Shaft / Wellen / Arbres / Ejes				
D j6	B	b	t	f
40	80	12	43	M16
(28)	(60)	(8)	(31)	(M10)

输出法兰尺寸


Flange / Flanges / Flansche / Flasques / Bidas			
P	M	N f8	O
250	215	180	14
(200)	(165)	(130)	(14)

PAM	A	kg
063	55	14.6
071	55	14.7
080 - 090	86	15.3

- Weight without motor
- 重量 (不包括马达)

(..) Only on request
(..) 下单时须注明机别要求


For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.
有关马达法兰的连减尺寸 (Pm, Dm, bm, tm) 请参第134页。




IH...

Dimensions / 尺寸

A41 - A51 - A61

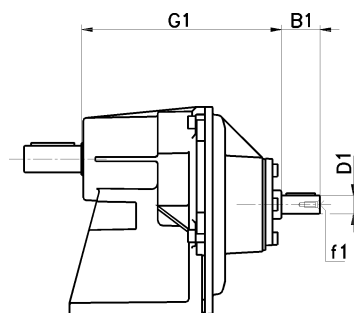


IH...

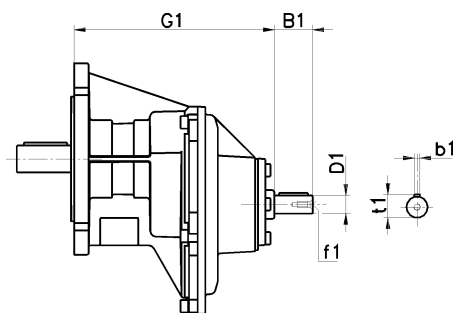


IH...F

	G1	D1	B1	b1	f1	t1
A41	176	16 j6	40	5	M6	18
A51	184,5	16 j6	40	5	M6	18
A61	209	19 j6	40	6	M6	21,5

A32 - A42 - A52 - A62

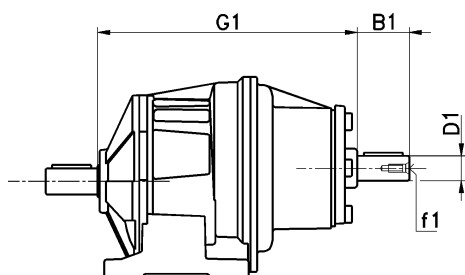


IH...

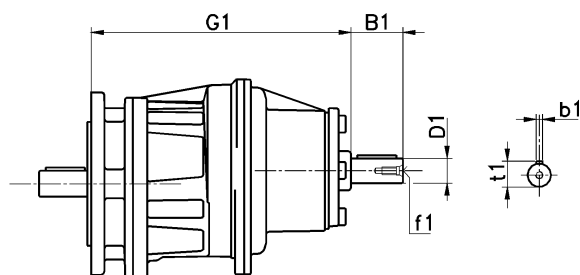

IH...F

	G1	D1	B1	b1	f1	t1
A32	198	16 j6	40	5	M6	18
A42	205	16 j6	40	5	M6	18
A52	239	19 j6	40	6	M6	21,5
A62	248	19 j6	40	6	M6	21,5


For the missing dimensions, please consider the drawing of relevant CH/H size.
关于没列出的尺寸, 请参考CH/H的相关尺寸




Dimensions / 尺寸

IH...

A33 - A43 - A53 - A63

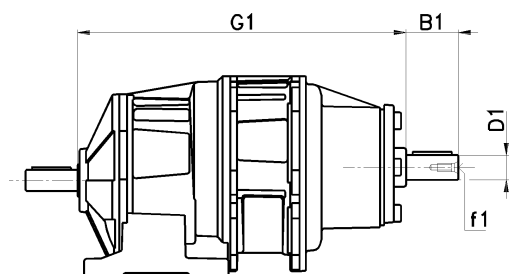


IH...

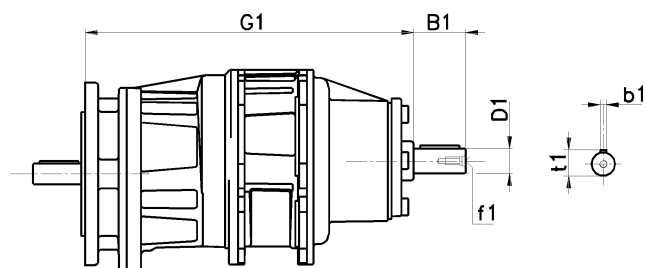

IH...F


	G1	D1	B1	b1	f1	t1
A33	251	16 j6	40	5	M6	18
A43	258	16 j6	40	5	M6	18
A53	299	16 j6	40	5	M6	18
A63	308	16 j6	40	5	M6	18

For the missing dimensions, please consider the drawing of relevant CH/H size.
关于没列出的尺寸，请参考CH/H的相关尺寸




032/..3


Dimensions / 尺寸

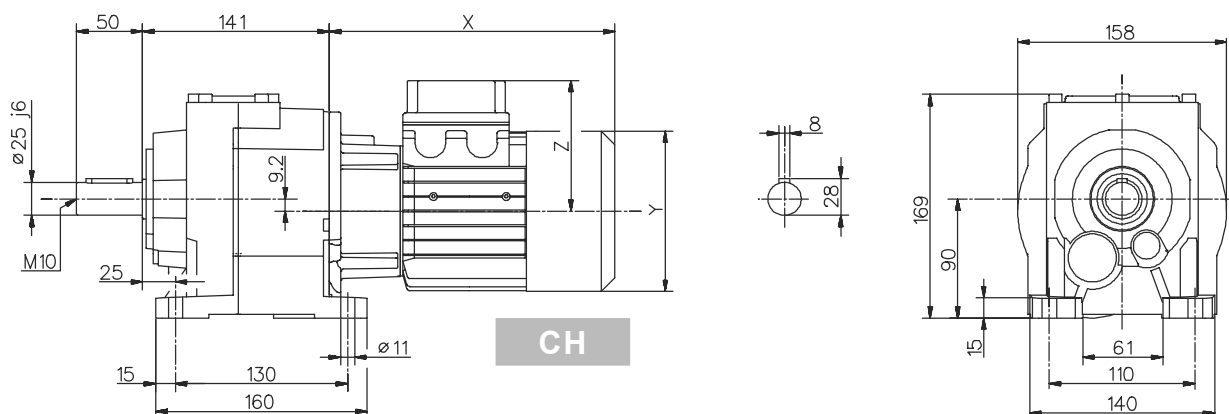


CH

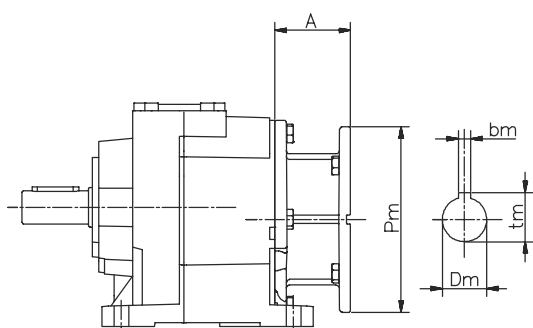


H

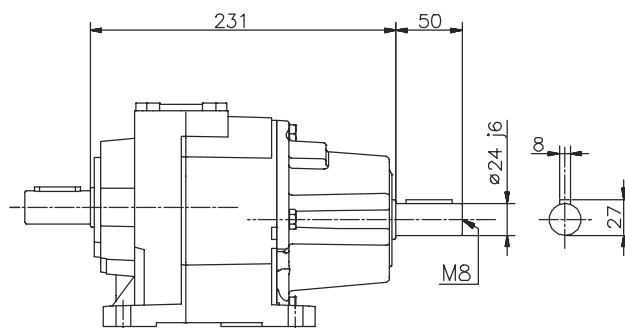

IH

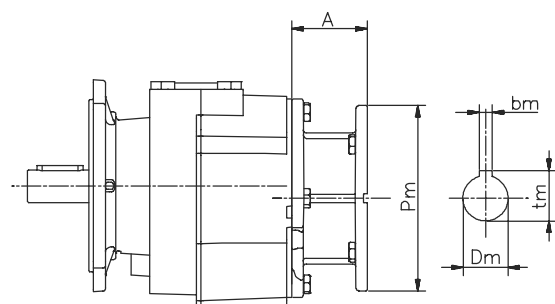

H...F FA-FB-FC

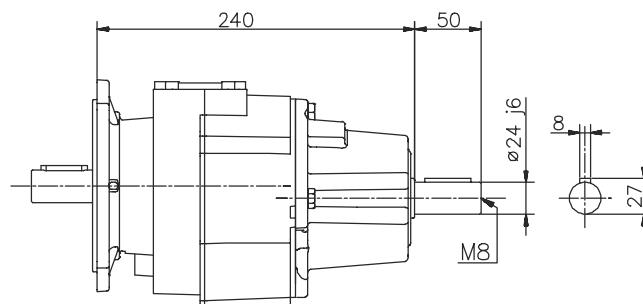


IH...F FA-FB-FC

030	IH	PAM		搭配标准马达尺寸				搭配刹车马达尺寸			
	~Kg	A	~Kg	X	Y	Z	~Kg	X	Y	Z	~Kg
063	12.2	57	9.1	214	121	99	12.6	273	121	99	14.1
071		69	9.5	240	139	111	13.5	305	139	111	15.7
080		90	10.1	268	158	122	18.2	341	158	122	21.7
090s		90	10.1	295	173	130	22.1	373	173	130	27.6
090l		90	10.1	320	173	130	24.1	398	173	130	29.6
100		105	14.4	333	191	139	29.6	415	191	139	35.1
112		105	14.4	352	211	150	41.1	448	211	150	50.8




For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.

关于没列出的尺寸，请参考CH/H的相关尺寸




Dimensions / 尺寸


032/..3

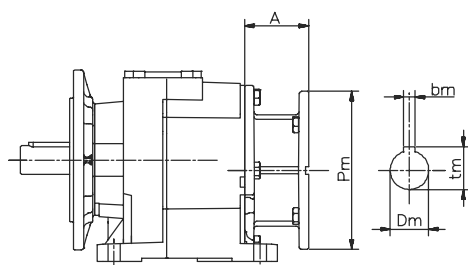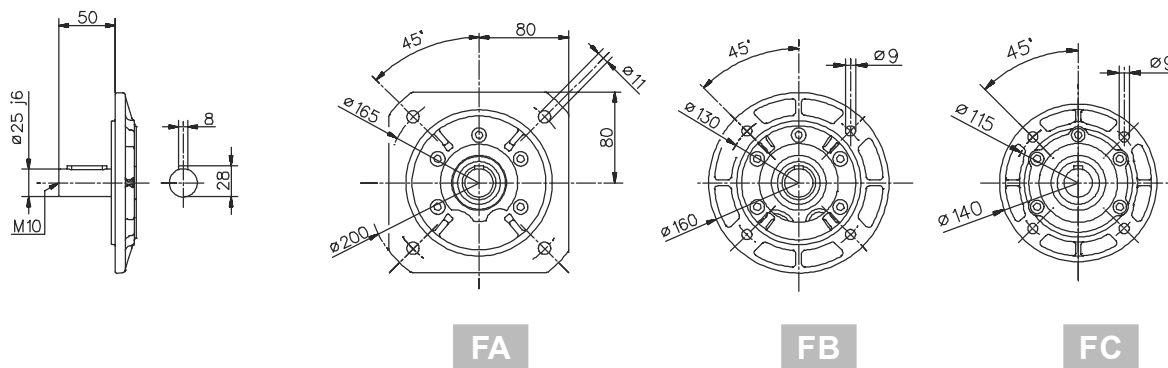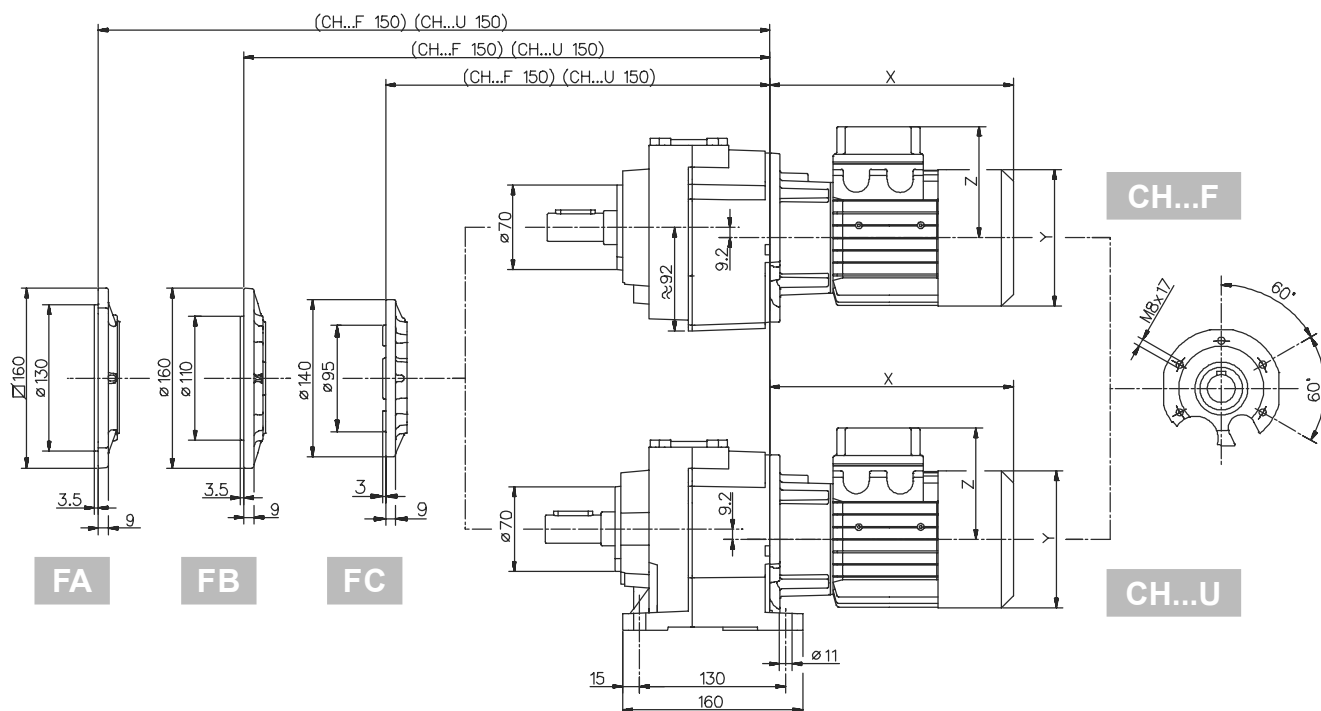

H...U FA-FB-FC

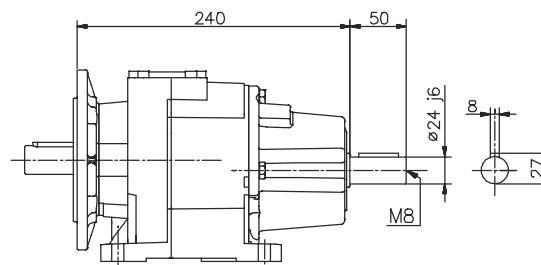


IH...U FA-FB-FC




041

Dimensions / 尺寸

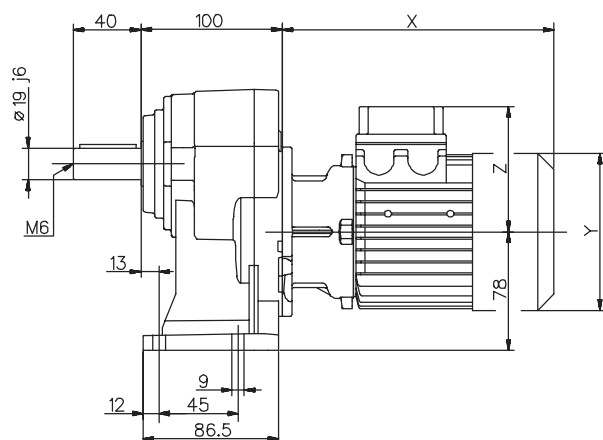







CH

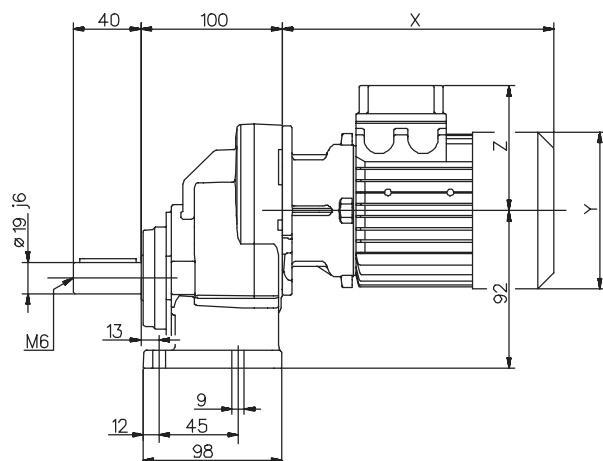

CH...M

041	IH	PAM		搭配标准马达尺寸				搭配刹车马达尺寸			
	~Kg	A	~Kg	X	Y	Z	~Kg	X	Y	Z	~Kg
071	7.9	69	5.2	240	139	111	9.2	305	139	111	11.4
080		90	5.8	268	158	122	13.9	341	158	122	17.4
090s		90	5.8	295	173	130	17.8	373	173	130	23.3
090l		90	5.8	320	173	130	19.8	398	173	130	25.3



For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.
关于没列出的尺寸, 请参考CH/H的相关尺寸

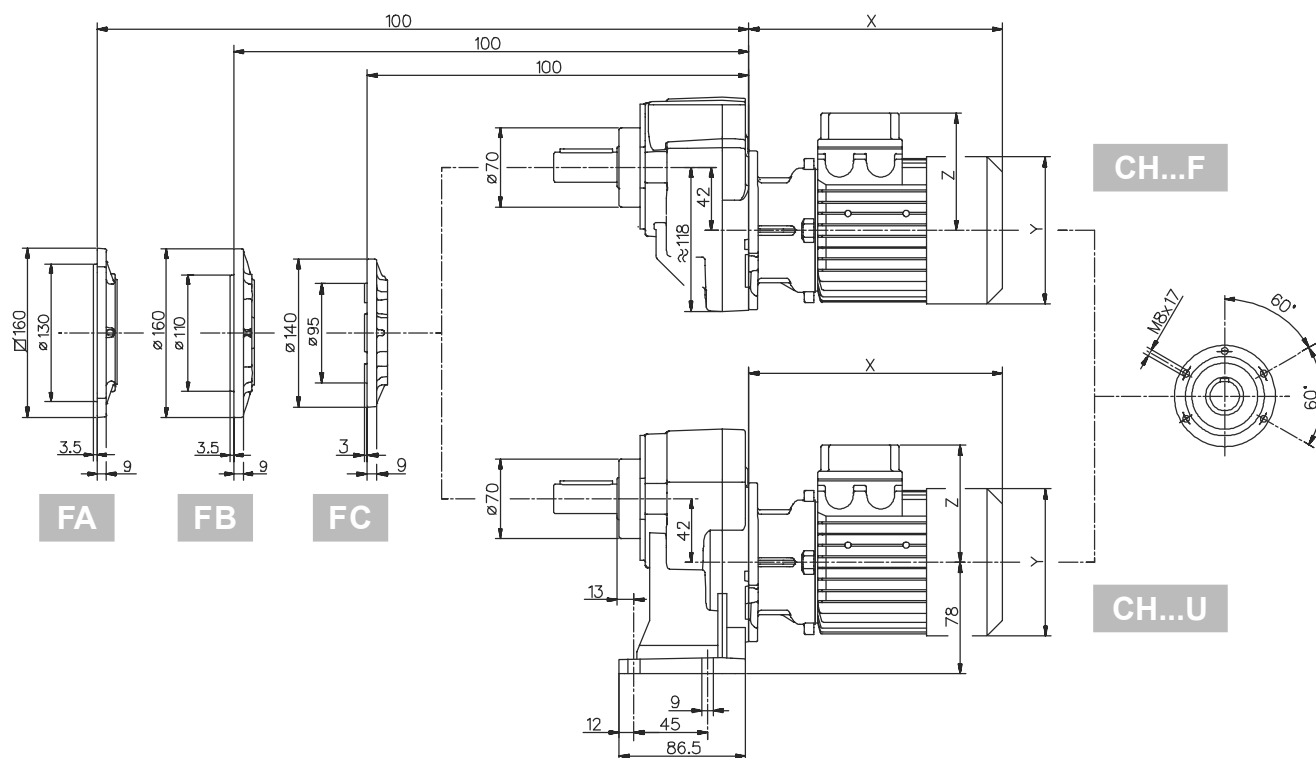


FA

FB







FC

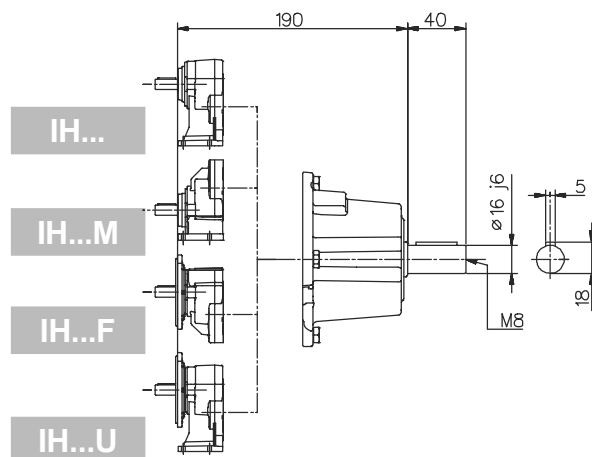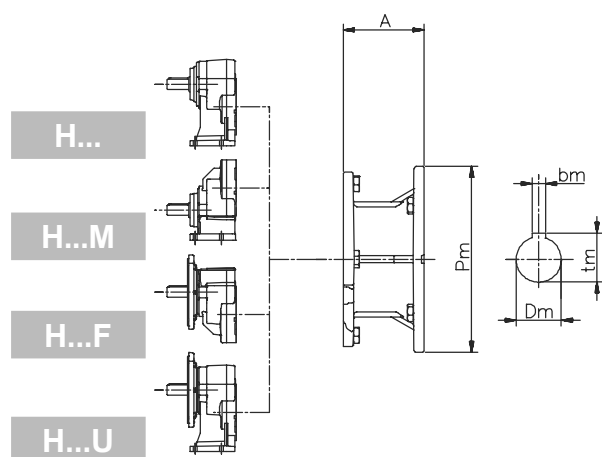



042/..3





Dimensions / 尺寸

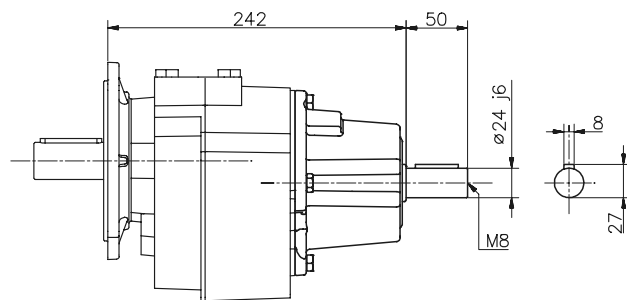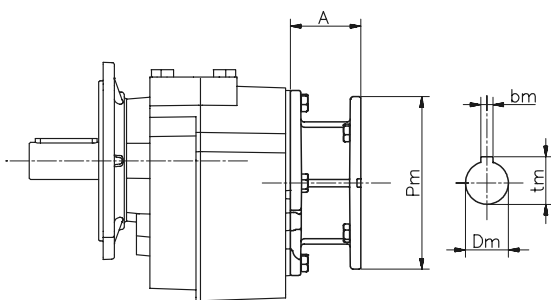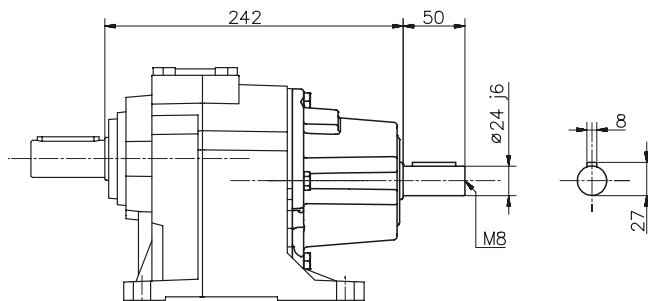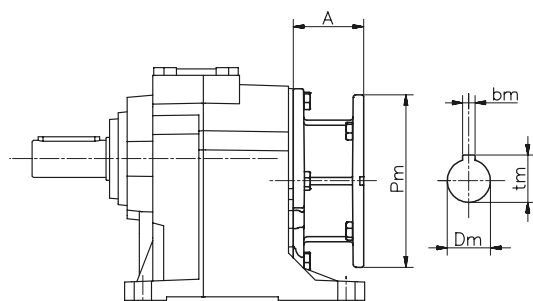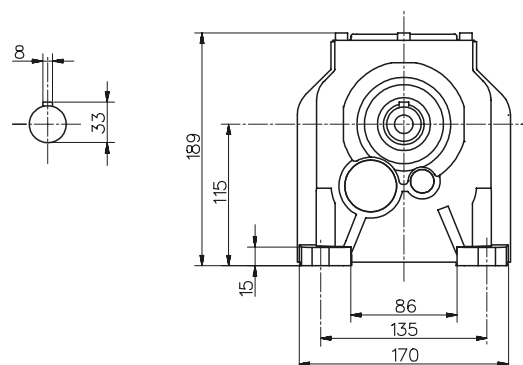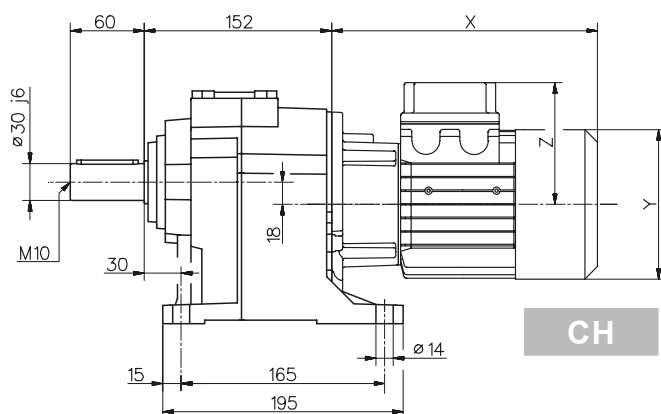


040	IH	PAM		搭配标准马达尺寸				搭配刹车马达尺寸			
	~Kg	A	~Kg	X	Y	Z	~Kg	X	Y	Z	~Kg
063	15.1	57	12	214	121	99	15.5	273	121	99	17
071		69	12.4	240	139	111	16.4	305	139	111	18.6
080		90	13	268	158	122	21.1	341	158	122	24.6
090s		90	13	295	173	130	25	373	173	130	30.5
090l		90	13	320	173	130	27	398	173	130	32.5
100		105	17.3	333	191	139	32.5	415	191	139	38
112		105	17.3	352	211	150	44	448	211	150	53.7

For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.


关于没列出的尺寸, 请参考CH/H的相关尺寸

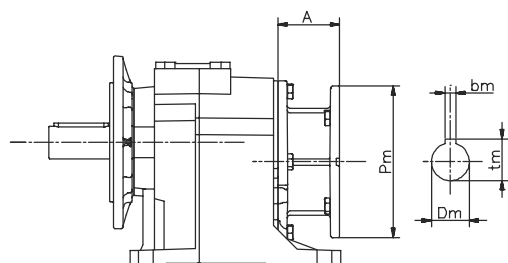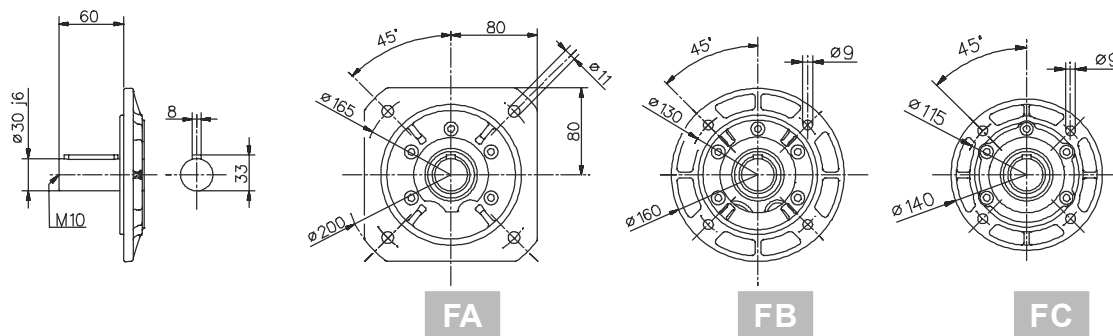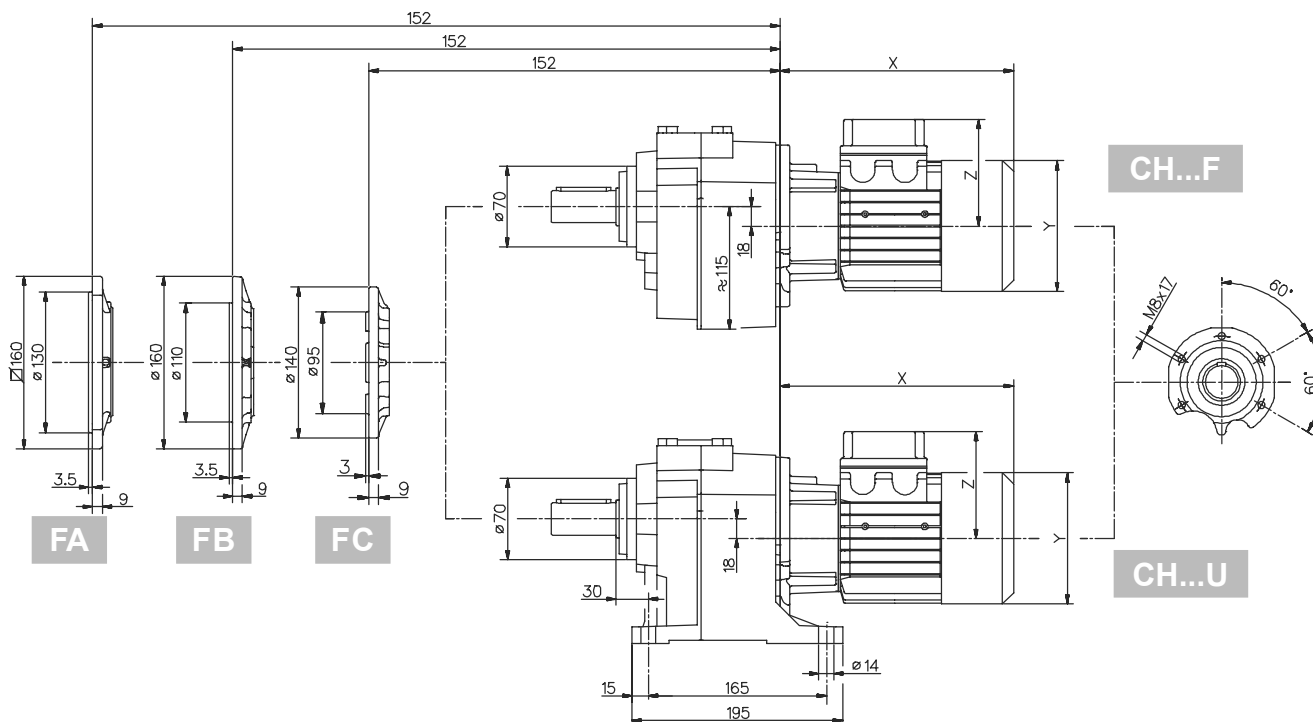





H...U FA-FB-FC

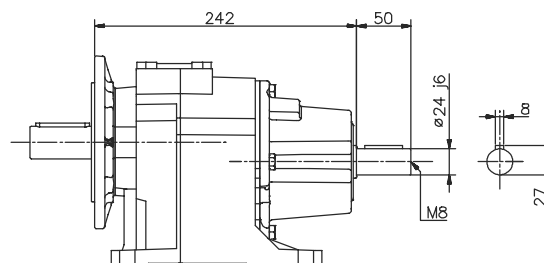

IH...U FA-FB-FC









Dimensions / 尺寸

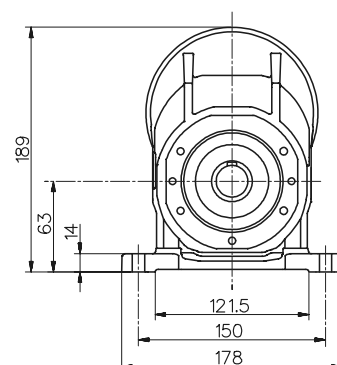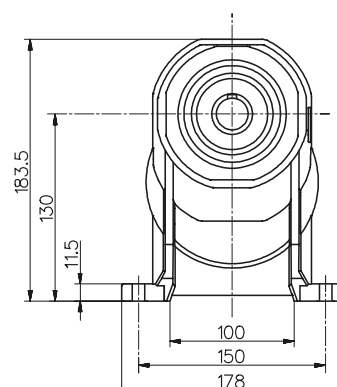

051	IH	PAM		搭配标准马达尺寸				搭配刹车马达尺寸			
	~Kg	A	~Kg	X	Y	Z	~Kg	X	Y	Z	~Kg
071	10	69	7.3	240	139	111	11.3	305	139	111	13.5
080		90	7.9	268	158	122	16	341	158	122	19.5
090s		90	7.9	295	173	130	19.9	373	173	130	25.4
090l		90	7.9	320	173	130	21.9	398	173	130	27.4
100		105	12.2	333	191	139	27.4	415	191	139	32.9
112		105	12.2	352	211	150	38.9	448	211	150	48.6



For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.
关于没列出的尺寸, 请参考CH/H的相关尺寸

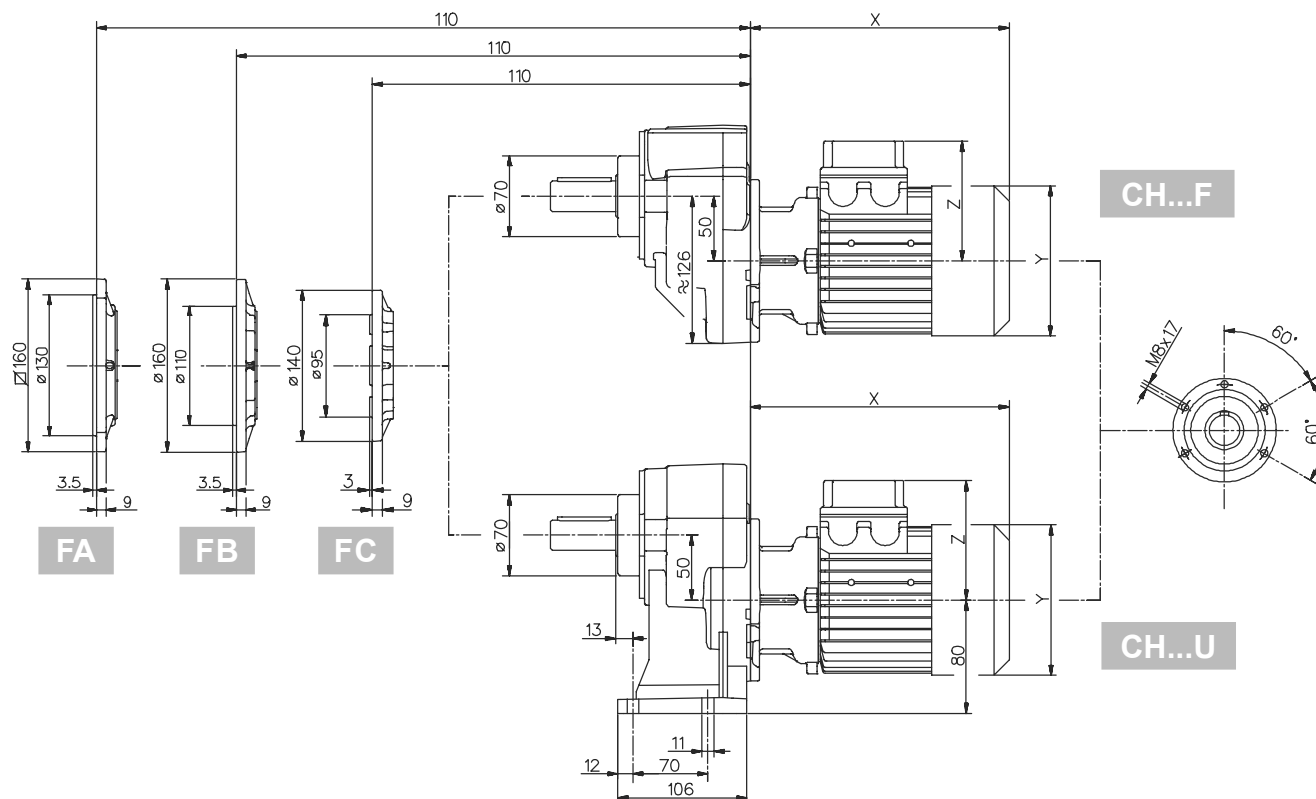


FA

FB


FC

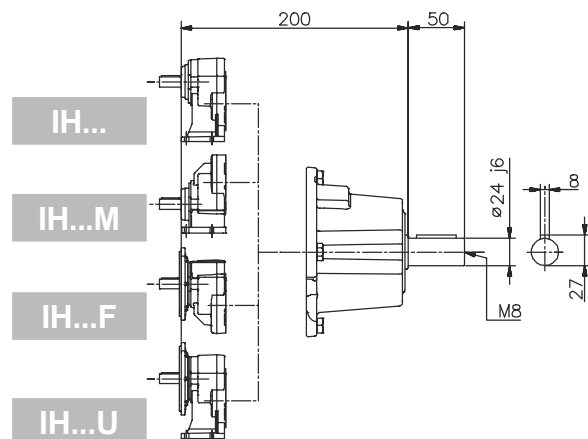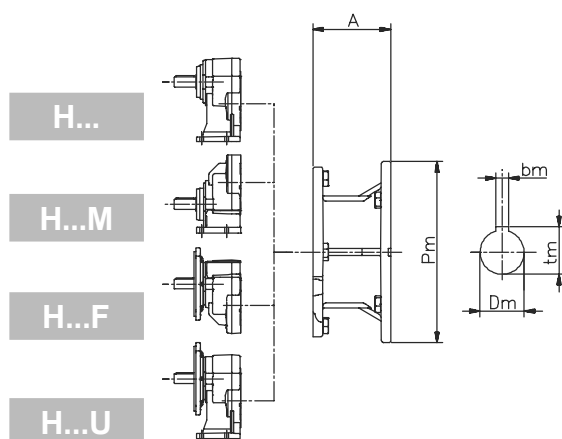




052/..3


Dimensions / 尺寸

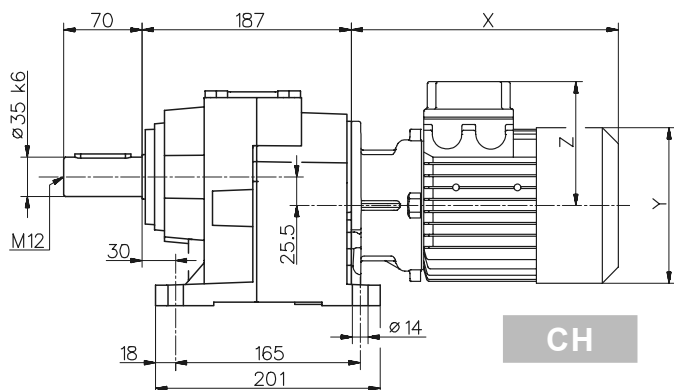


CH

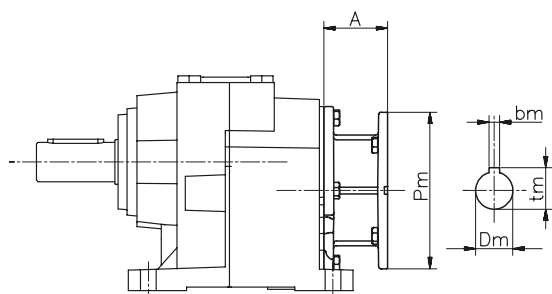


H

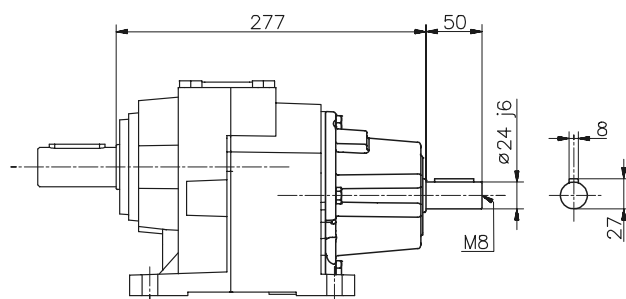

IH

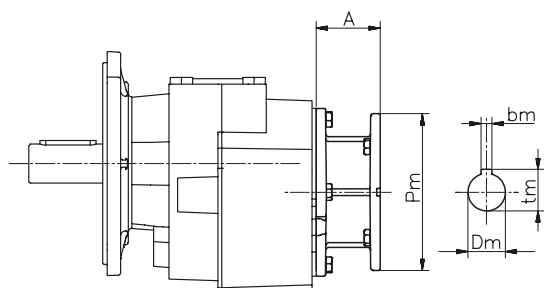


H...F FA-FB

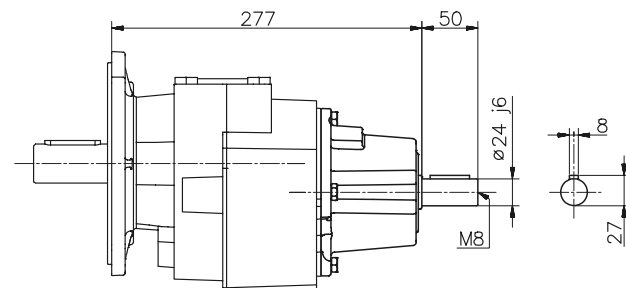

IH...F FA-FB






050	IH	PAM		搭配标准马达尺寸				搭配刹车马达尺寸			
	~Kg	A	~Kg	X	Y	Z	~Kg	X	Y	Z	~Kg
063	20.4	57	17.3	214	121	99	20.8	273	121	99	22.3
071		69	17.7	240	139	111	21.7	305	139	111	23.9
080		90	18.3	268	158	122	26.4	341	158	122	29.9
090s		90	18.3	295	173	130	30.3	373	173	130	35.8
090l		90	18.3	320	173	130	32.3	398	173	130	37.8
100		105	22.6	333	191	139	37.8	415	191	139	43.3
112		105	22.6	352	211	150	49.3	448	211	150	59


For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.
关于没列出的尺寸, 请参考CH/H的相关尺寸.



Dimensions / 尺寸


052/..3

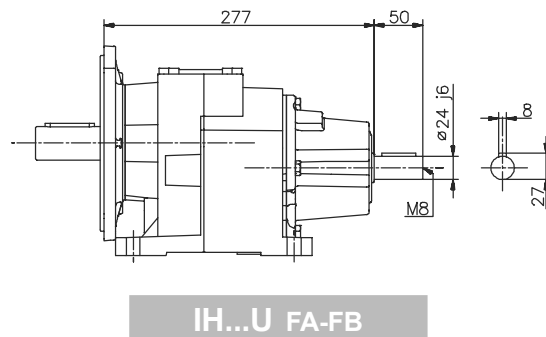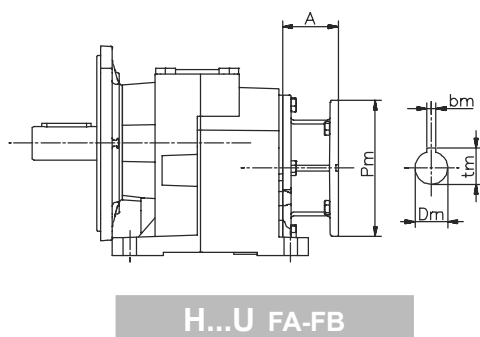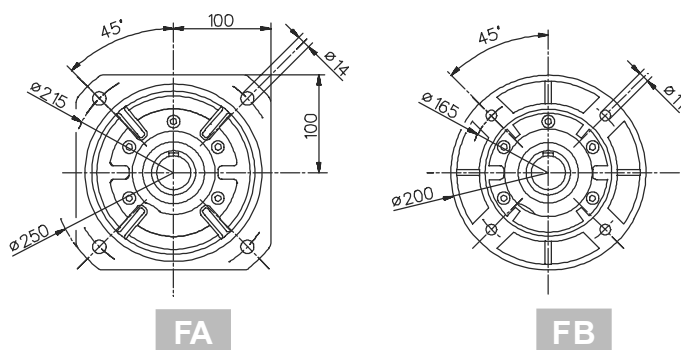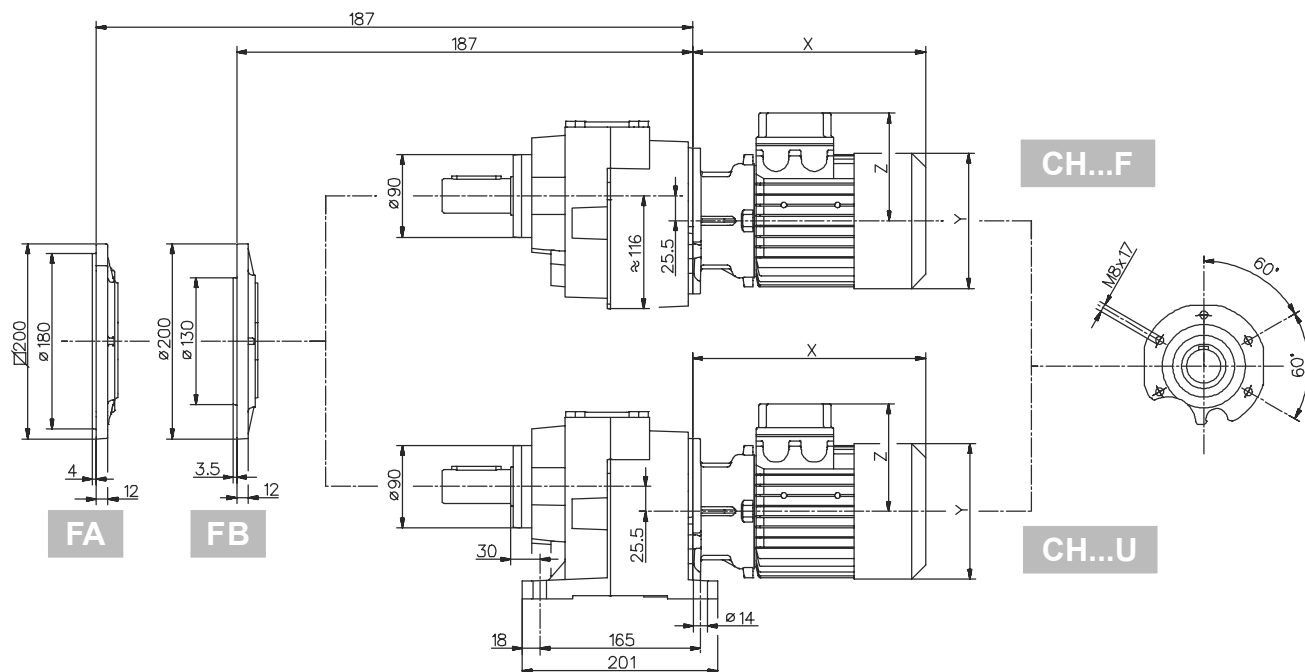




061

Dimensions / 尺寸

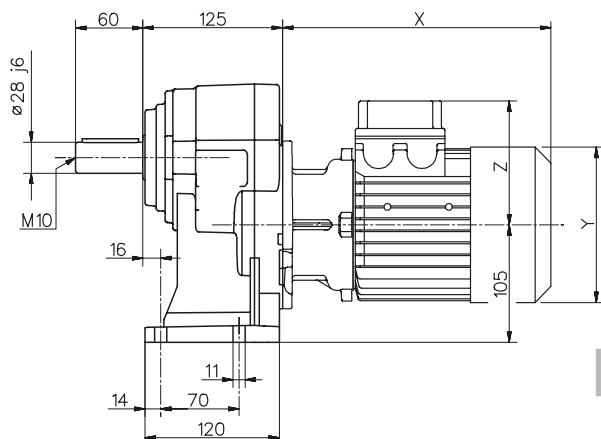







CH

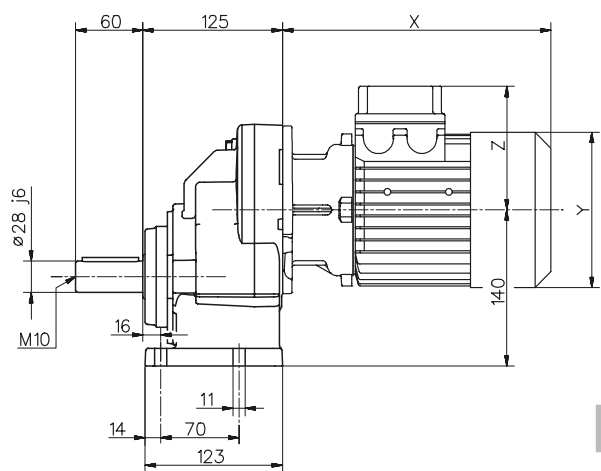


CH...M

061	IH	PAM		搭配标准马达尺寸				搭配刹车马达尺寸			
	~Kg	A	~Kg	X	Y	Z	~Kg	X	Y	Z	~Kg
080	12	90	9.9	268	158	122	18	341	158	122	21.5
090s		90	9.9	295	173	130	21.9	373	173	130	27.4
090l		90	9.9	320	173	130	23.9	398	173	130	29.4
100		105	14.2	333	191	139	29.4	415	191	139	34.9
112		105	14.2	352	211	150	40.9	448	211	150	50.6


For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.
关于没列出的尺寸, 请参考CH/H的相关尺寸.

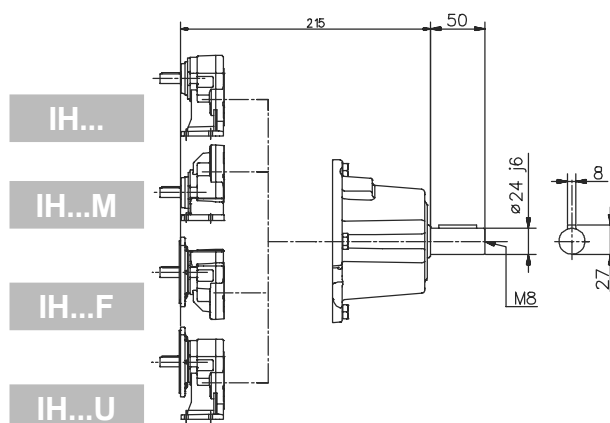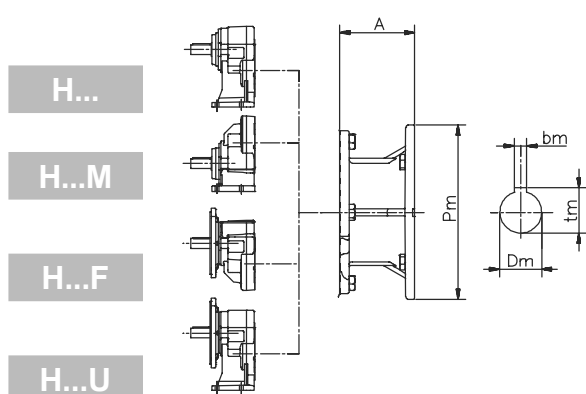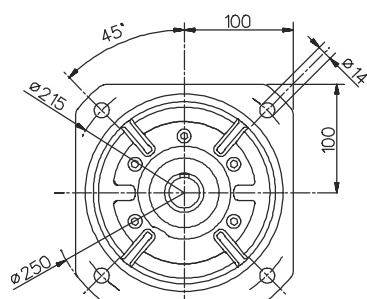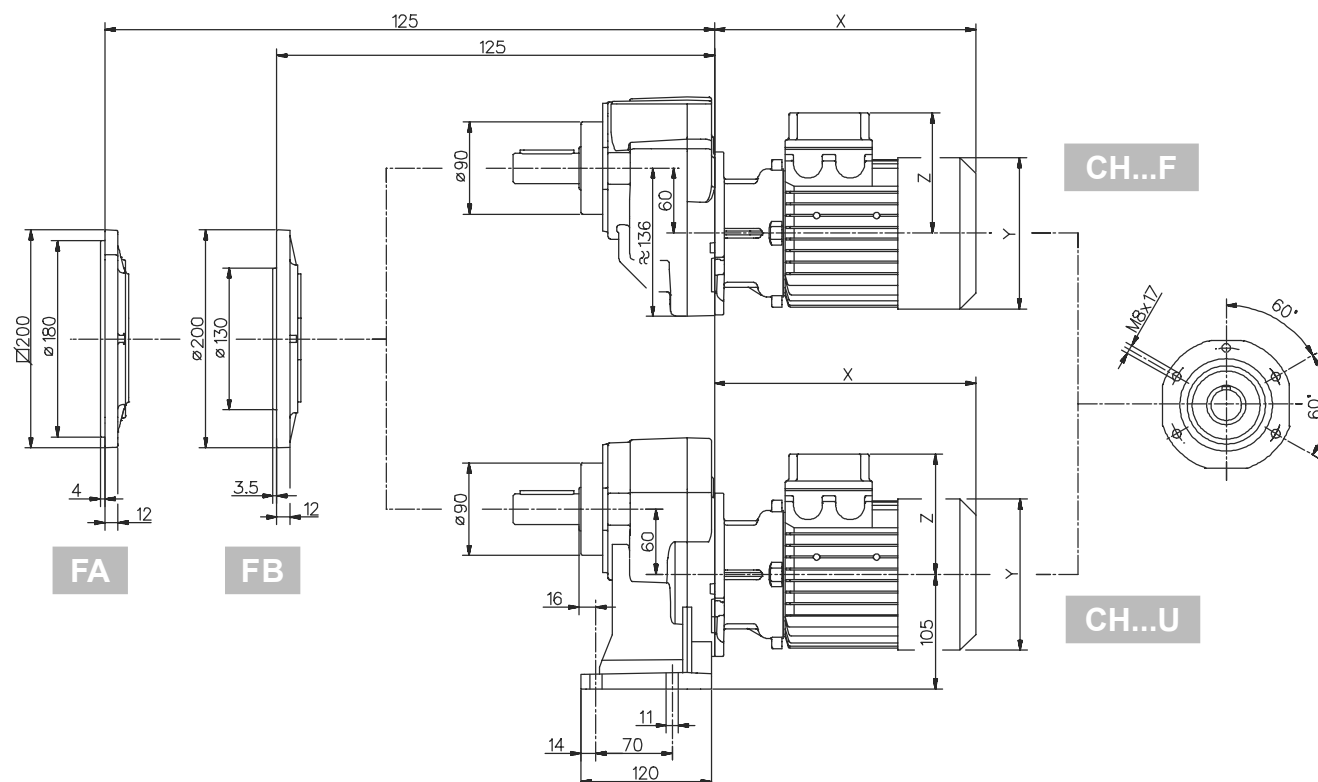



062/..3

Dimensions / 尺寸




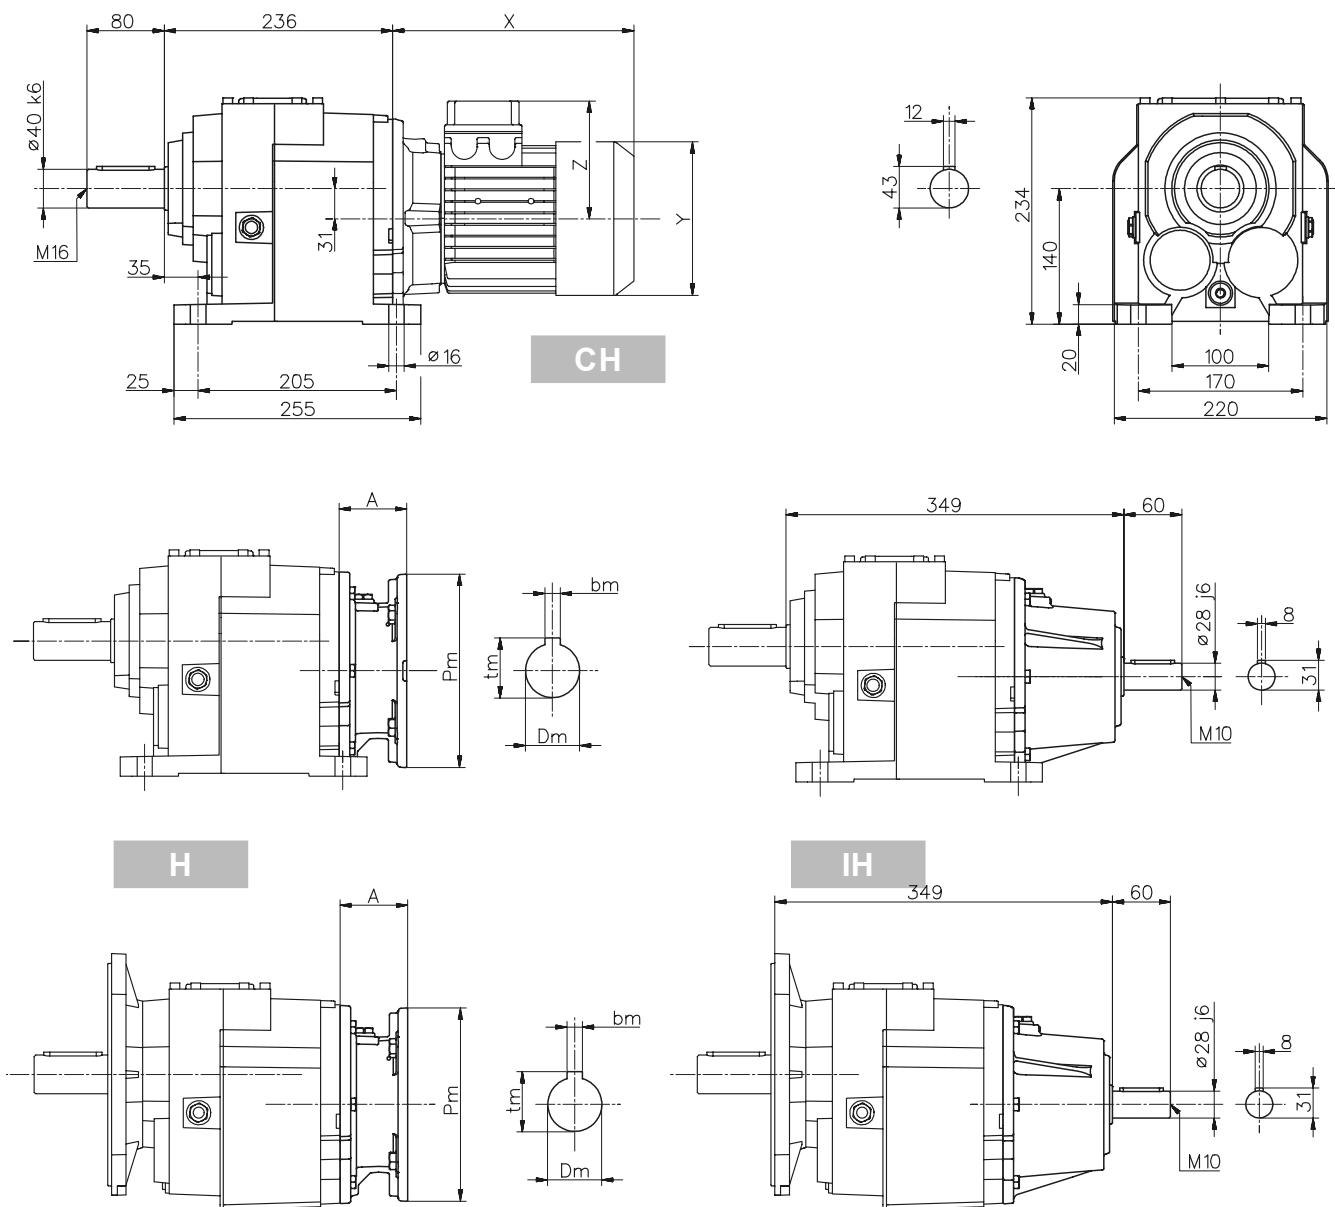


H...F FA-FB

IH...F FA-FB



060	IH	PAM		搭配标准马达尺寸				搭配刹车马达尺寸			
	~Kg	A	~Kg	X	Y	Z	~Kg	X	Y	Z	~Kg
071	35.2	49	29.1	220	139	111	32.7	285	139	111	34.9
080		70	31.2	248	158	122	37.8	321	158	122	41.3
090s		70	31.2	275	173	130	40.2	353	173	130	45.7
090l		70	31.2	300	173	130	41.7	378	173	130	47.2
100		85	33.3	335	191	139	46.8	417	191	139	52.3
112		85	33.3	357	211	150	58.2	453	211	150	67.9
132s		110	36	406	249	194	72.2	495	249	194	82.5
132m	110	36	444	249	194	83.8	547	249	194	98.5	

For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.
关于没列出的尺寸, 请参考CH/H的相关尺寸.

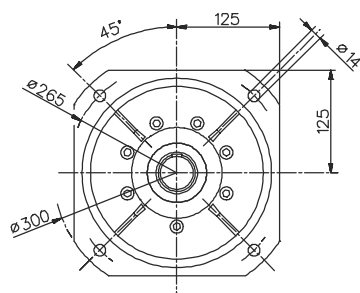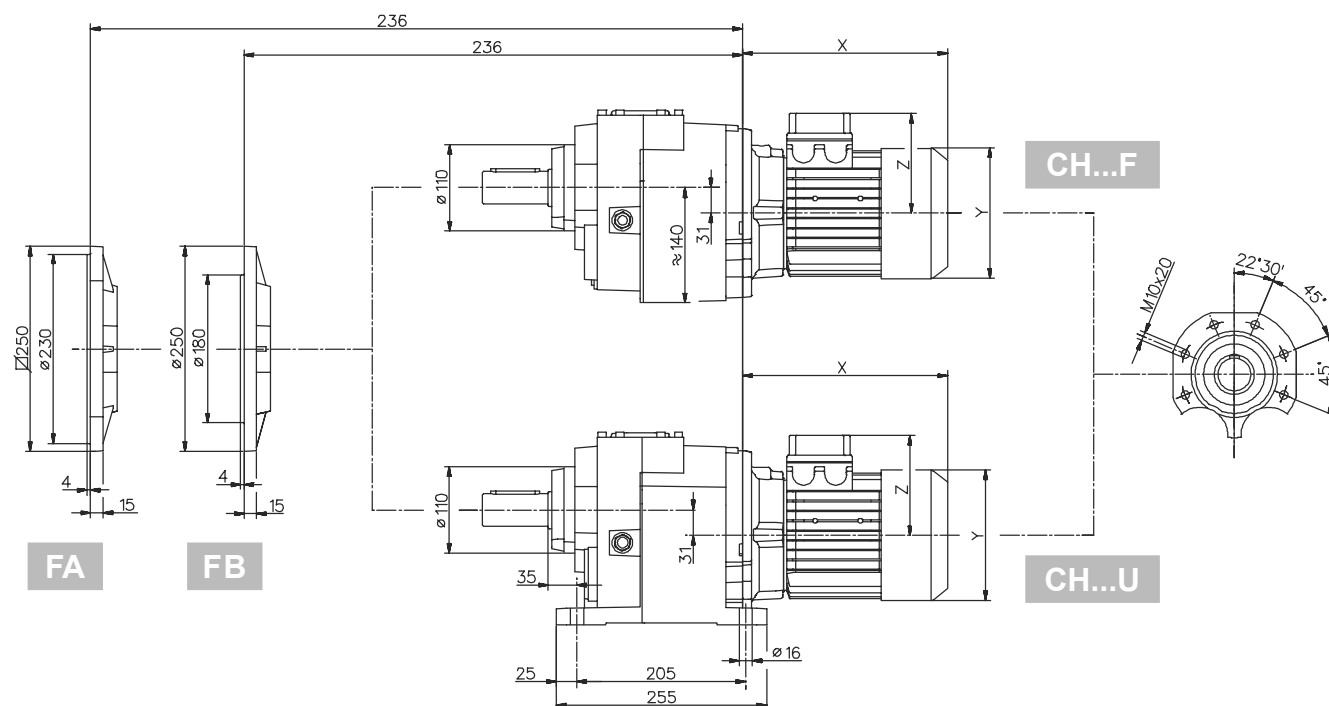


FA

FB

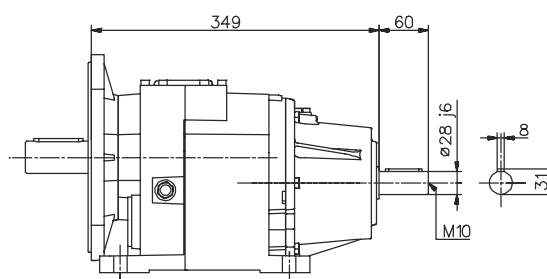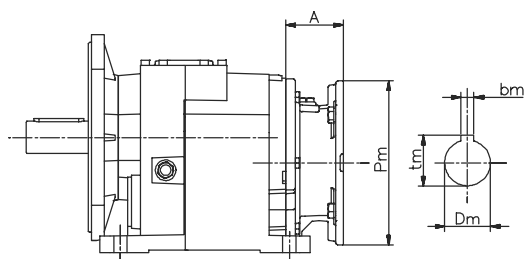


H...U FA-FB

IH...U FA-FB




081

Dimensions / 尺寸

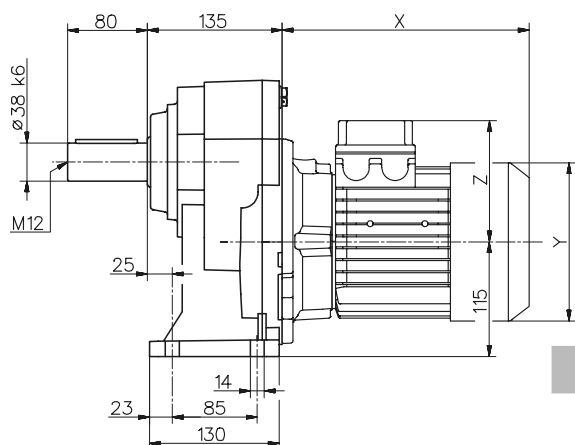








CH

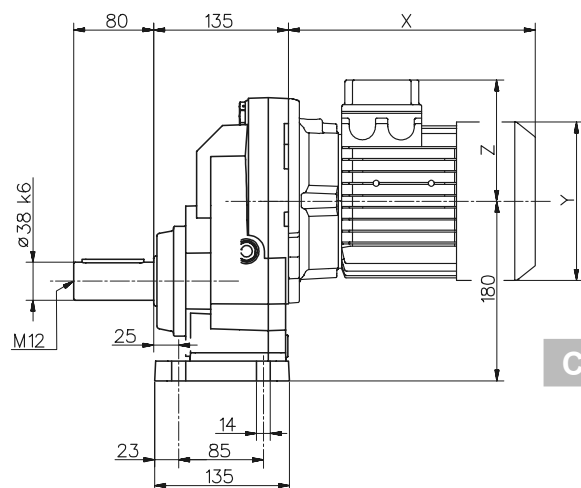


CH...M

081	IH	PAM		搭配标准马达尺寸				搭配刹车马达尺寸			
	~Kg	A	~Kg	X	Y	Z	~Kg	X	Y	Z	~Kg
080	24.5	70	20.6	248	158	122	27.1	321	158	122	30.6
090s		70	20.6	275	173	130	29.5	353	173	130	35
090l		70	20.6	300	173	130	31	378	173	130	36.5
100		85	22.6	335	191	139	36.1	417	191	139	41.6
112		85	22.6	357	211	150	47.5	453	211	150	57.2
132s		110	25.2	406	249	194	61.5	495	249	194	71.8
132m		110	25.2	444	249	194	73.1	547	249	194	87.8







For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.
关于没列出的尺寸，请参考CH/H的相关尺寸。

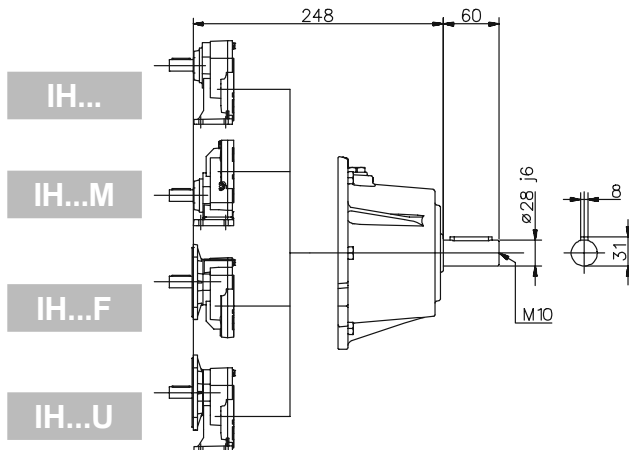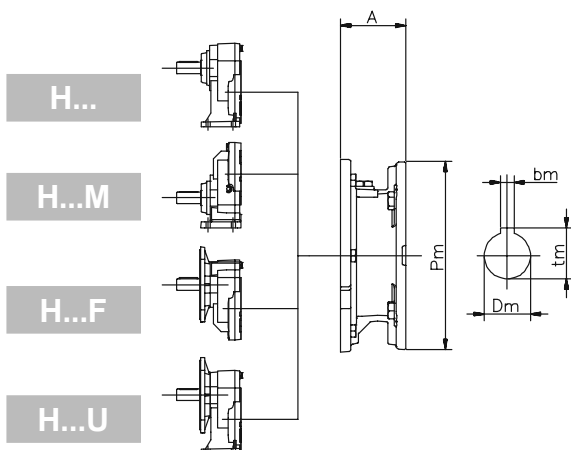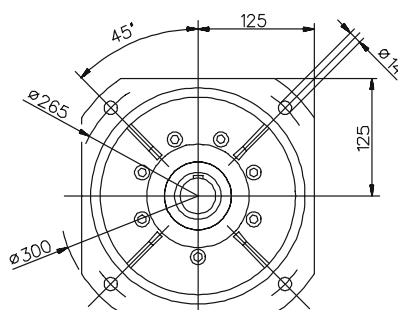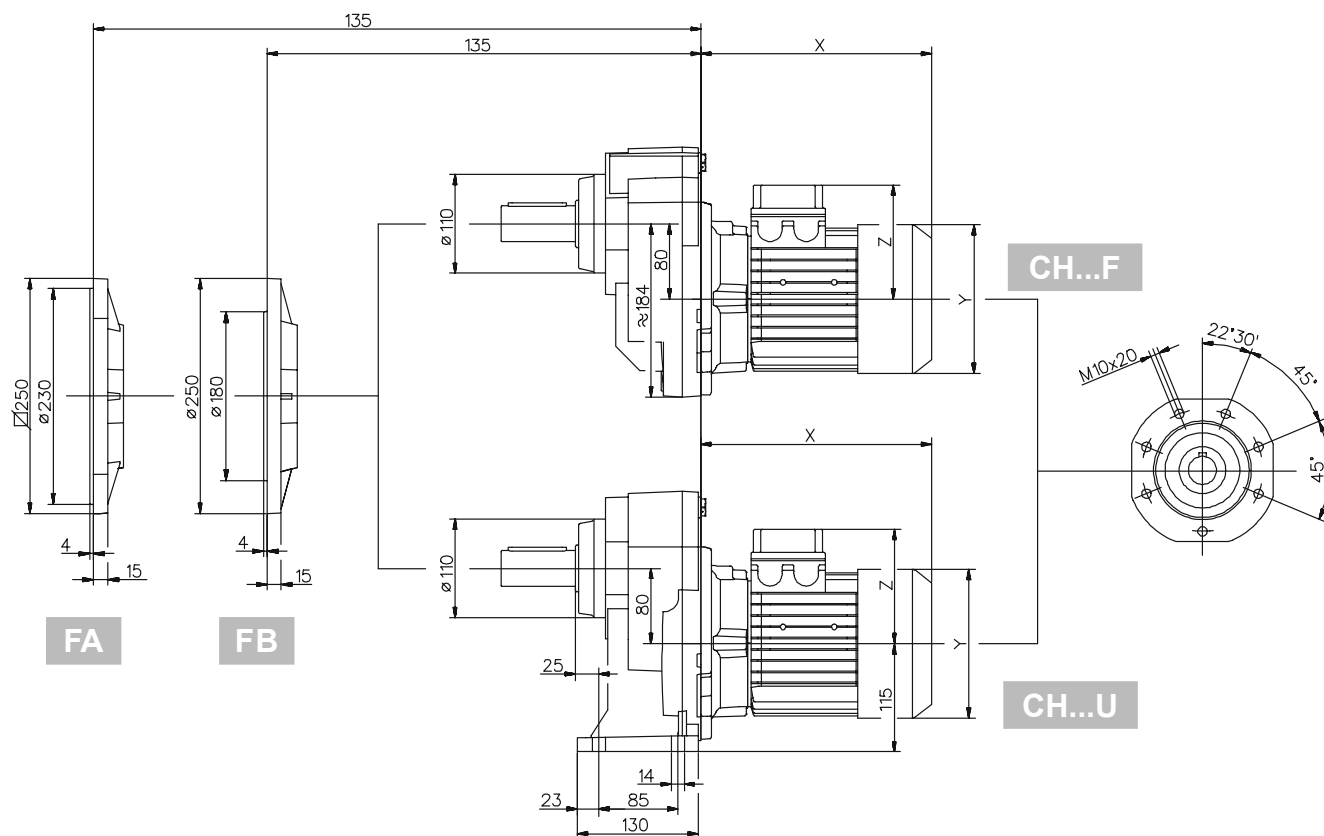







082/..3


Dimensions / 尺寸

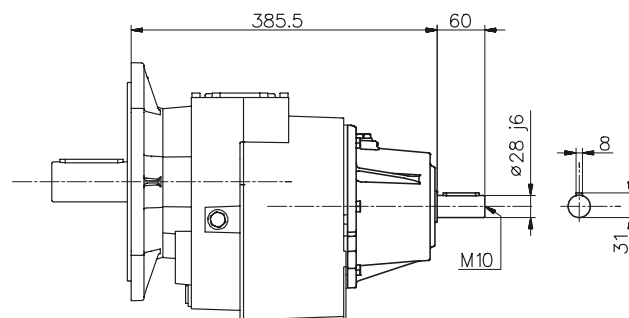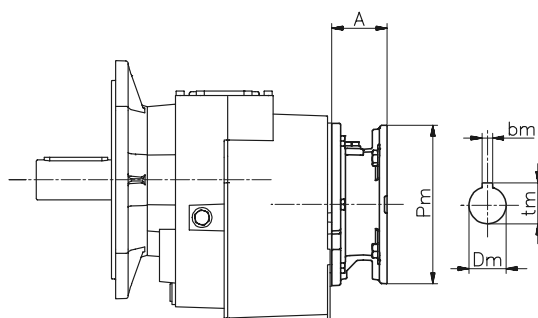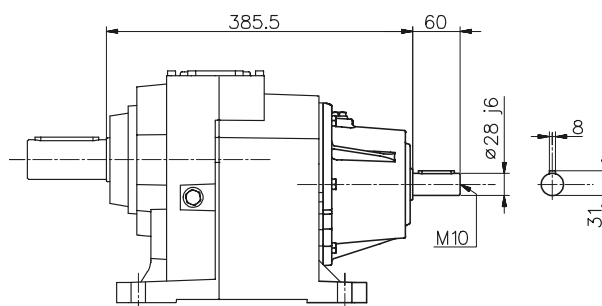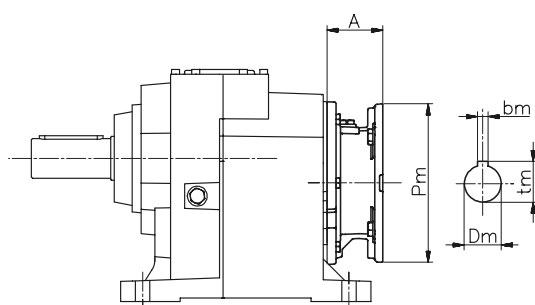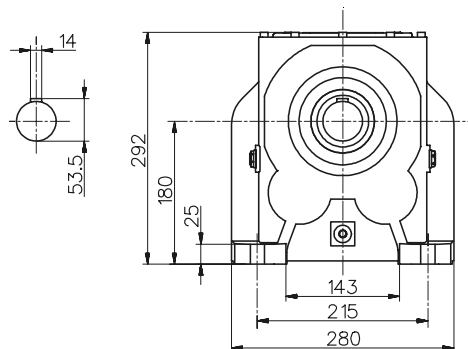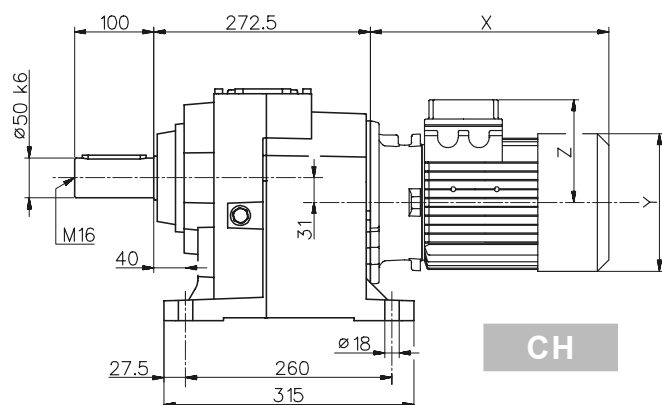

080	IH	PAM		搭配标准马达尺寸				搭配刹车马达尺寸			
	~Kg	A	~Kg	X	Y	Z	~Kg	X	Y	Z	~Kg
080	52.1	70	48.1	248	158	122	54.7	321	158	122	58.2
090s		70	48.1	275	173	130	57.1	353	173	130	62.6
090l		70	48.1	300	173	130	58.6	378	173	130	64.1
100		85	50.2	335	191	139	63.7	417	191	139	69.2
112		85	50.2	357	211	150	75.1	453	211	150	84.8
132s		110	52.9	406	249	194	89.1	495	249	194	99.4
132m		110	52.9	444	249	194	100.7	547	249	194	115.4
160s		158	59.5	522	310	244	-	-	-	-	-
160l		158	59.5	566	310	244	-	-	-	-	-


For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.
关于没列出的尺寸，请参考CH/H的相关尺寸。

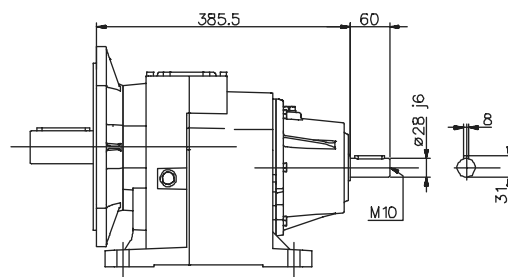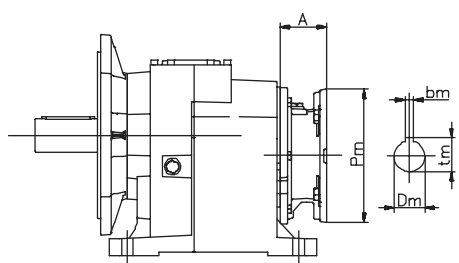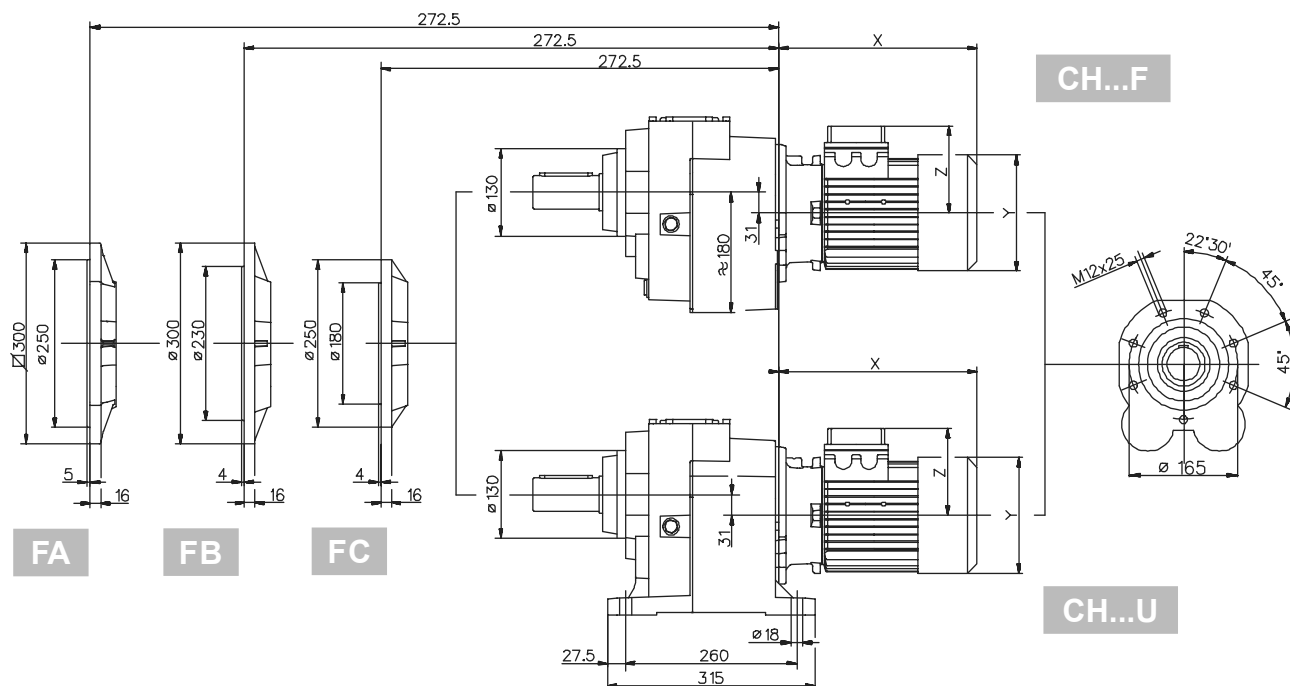






101



Dimensions / 尺寸

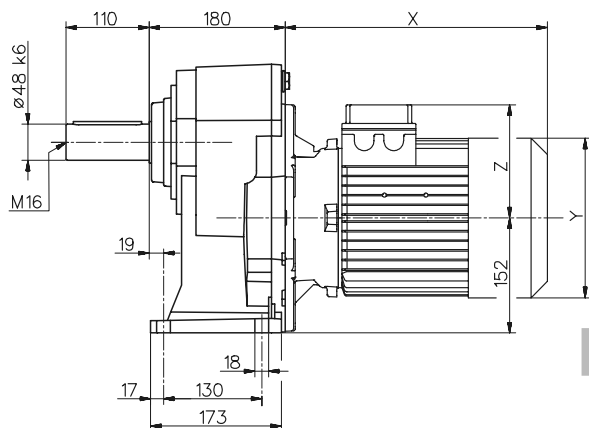

CH

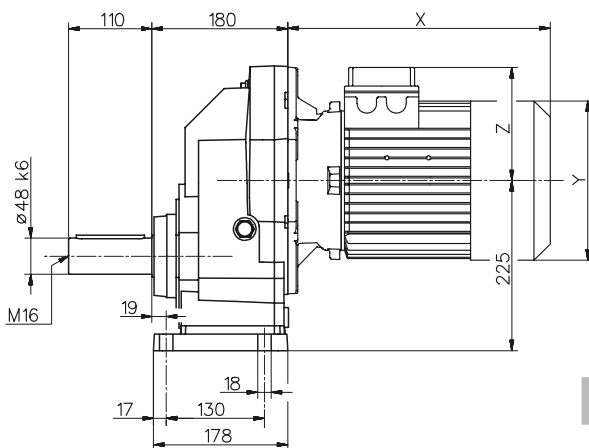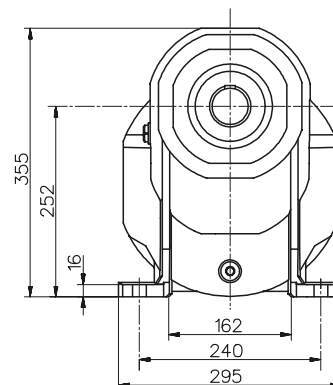



CH...M

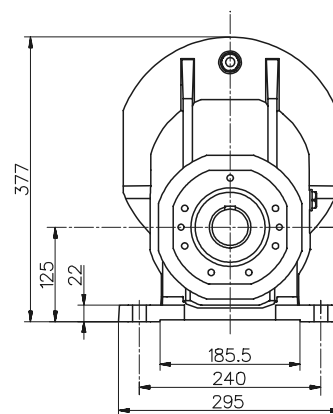






101	IH	PAM		搭配标准马达尺寸				搭配刹车马达尺寸			
	~Kg	A	~Kg	X	Y	Z	~Kg	X	Y	Z	~Kg
100	43.4	76	35.8	325	191	139	49.6	407	191	139	55
112		76	35.8	347	211	150	59.6	443	211	150	69.3
132s		101	38.6	396	249	194	74.6	485	249	194	85
132m		101	38.6	434	249	194	83.6	537	249	194	98.3
160s		148	44.6	540	310	244	-	-	-	-	-
160l		148	44.6	584	310	244	-	-	-	-	-
180		148	44.6	641	349	260	-	-	-	-	-

For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.
关于没列出的尺寸, 请参考CH/H的相关尺寸.

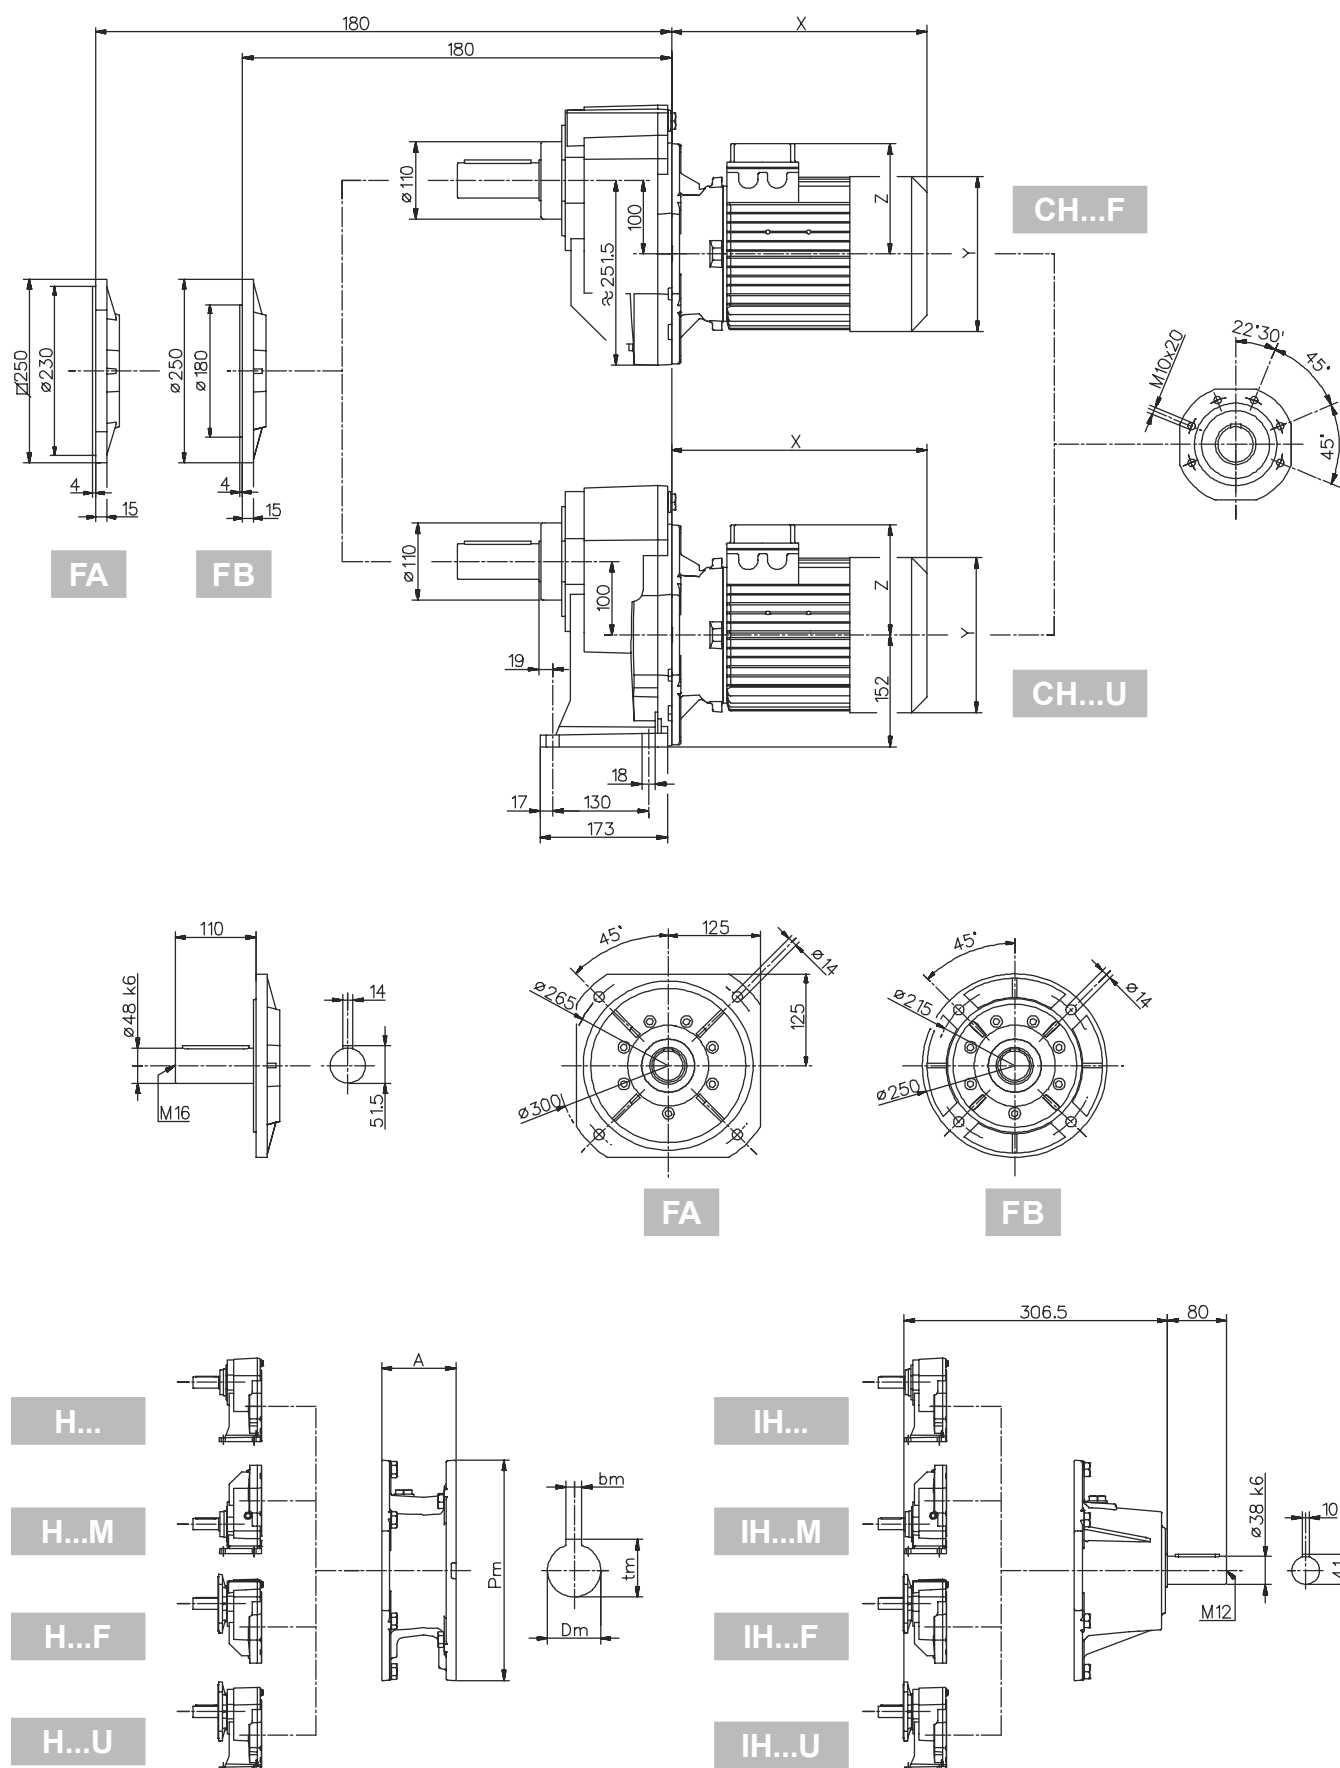








Dimensions / 尺寸

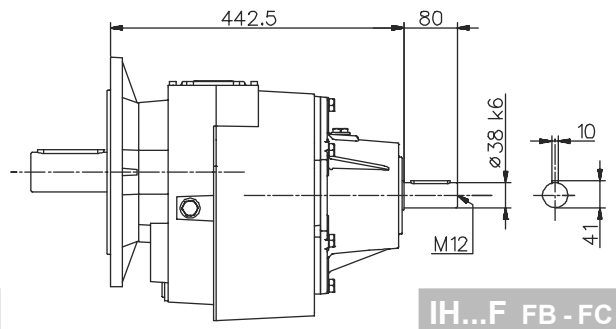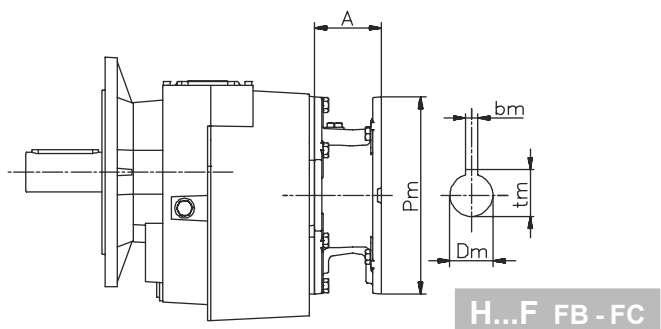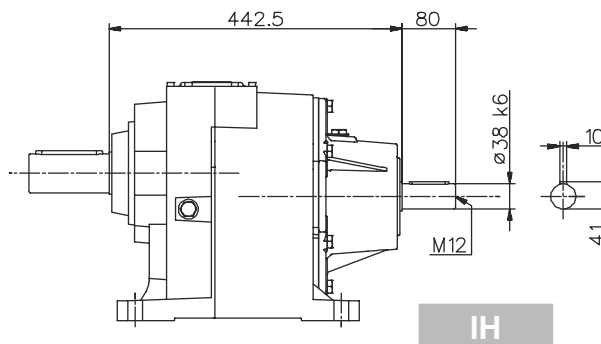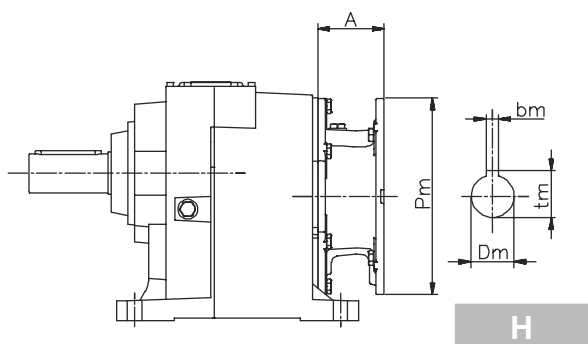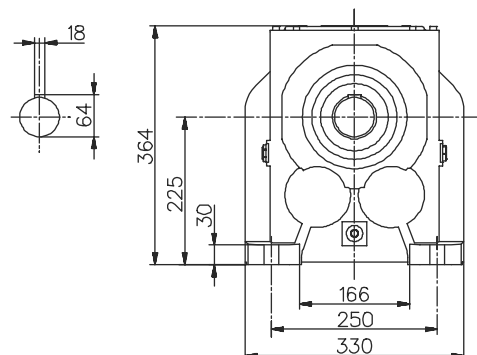


100	IH	PAM		搭配标准马达尺寸				搭配刹车马达尺寸			
	~Kg	A	~Kg	X	Y	Z	~Kg	X	Y	Z	~Kg
090s	86.9	61	77	265	173	130	86	343	173	130	91.6
090l		61	77	290	173	130	87	368	173	130	92.6
100		76	79.3	325	191	139	93	407	191	139	98.6
112		76	79.3	347	211	150	103	443	211	150	112.8
132s		101	82.1	396	249	194	118	485	249	194	128.4
132m		101	82.1	434	249	194	127	537	249	194	141.8
160s		148	88.1	540	310	244	-	-	-	-	-
160l		148	88.1	584	310	244	-	-	-	-	-
180	148	88.1	641	349	260	-	-	-	-	-	

For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.
关于没列出的尺寸, 请参考CH/H的相关尺寸

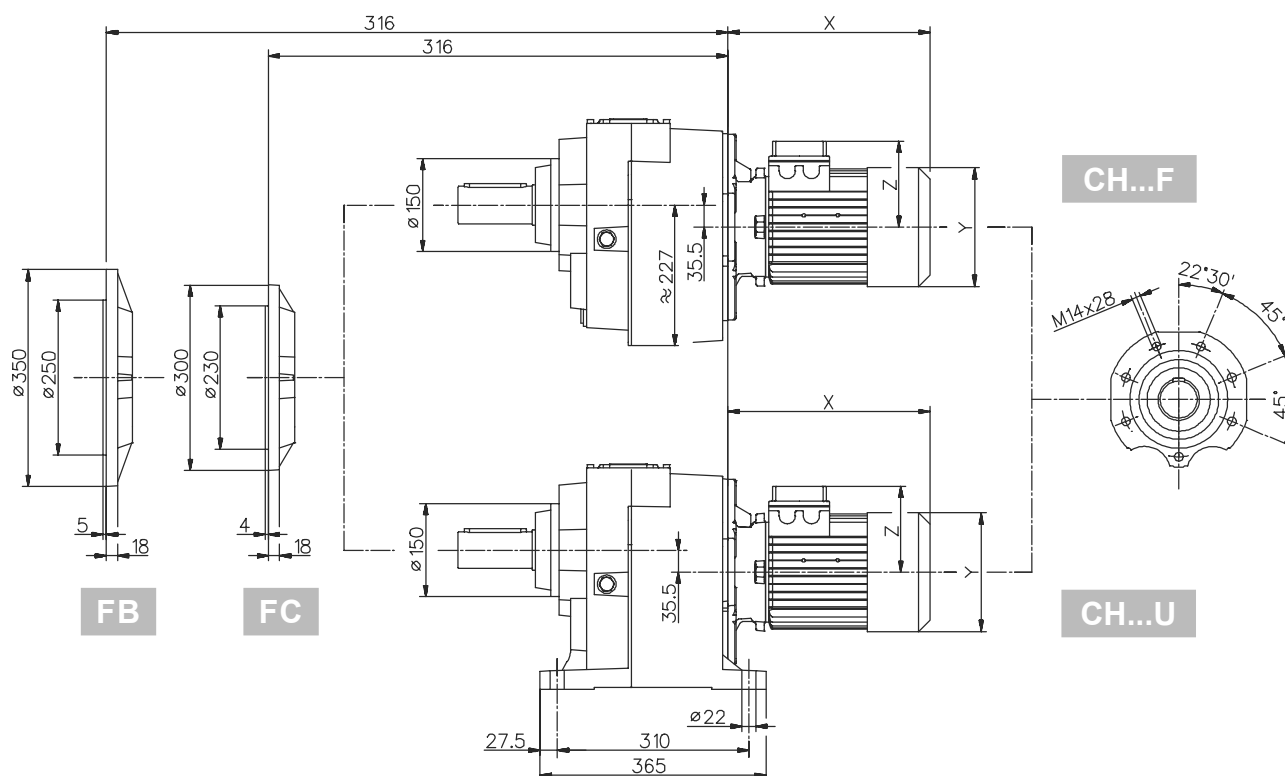


FB


FC

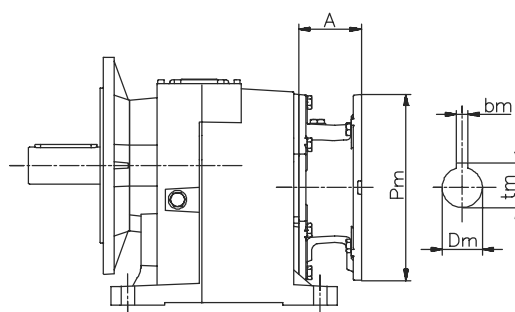

H...U FB-FC

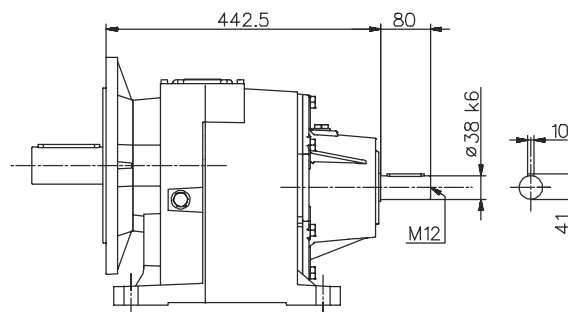


IH...U FB-FC





121


Dimensions / 尺寸

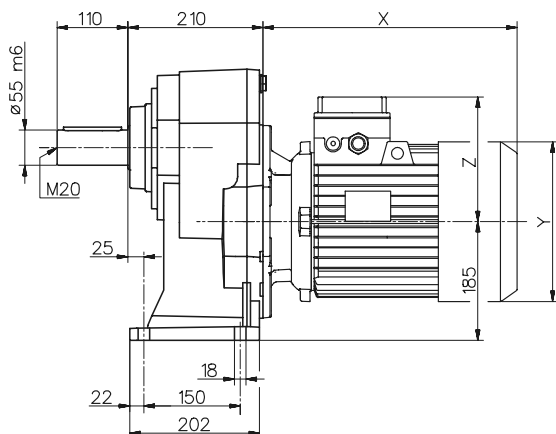

CH


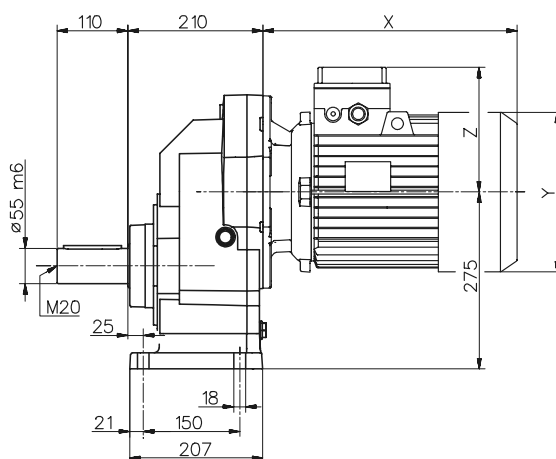
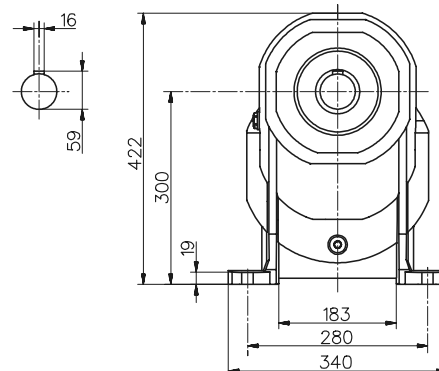



CH...M

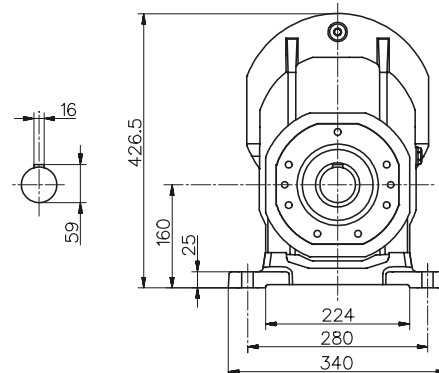

121	IH	PAM		搭配标准马达尺寸				搭配刹车马达尺寸			
	~Kg	A	~Kg	X	Y	Z	~Kg	X	Y	Z	~Kg
132s	45.8	101	41	396	249	194	77	485	249	194	87.3
132m		101	41	434	249	194	86	537	249	194	100.7
160s		148	47	540	310	244	-	-	-	-	-
160l		148	47	584	310	244	-	-	-	-	-
180		148	47	641	349	260	-	-	-	-	-
200		185	62	-	-	-	-	-	-	-	-


For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.
关于没列出的尺寸，请参考CH/H的相关尺寸

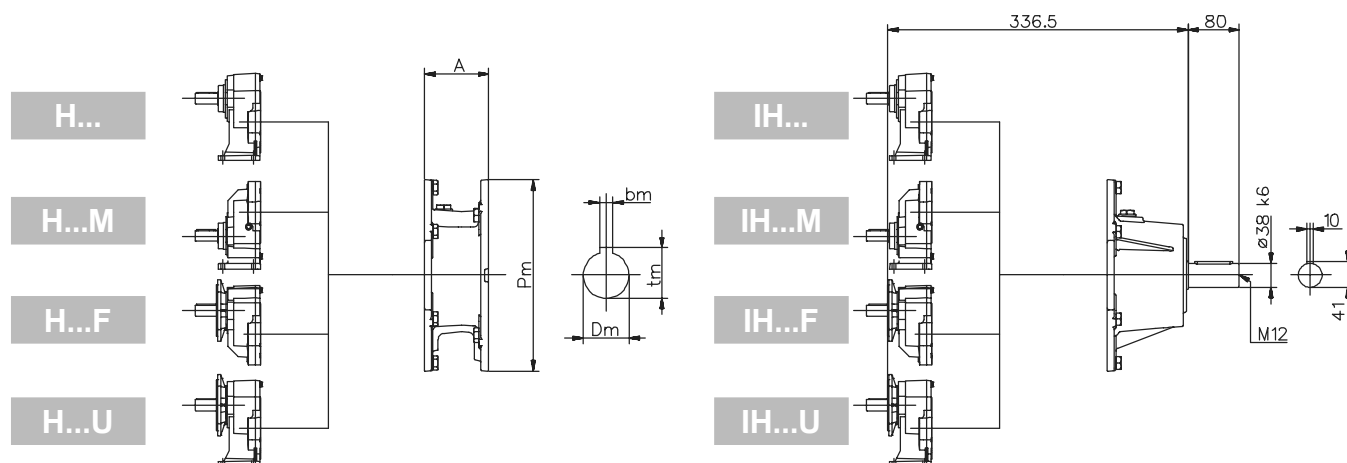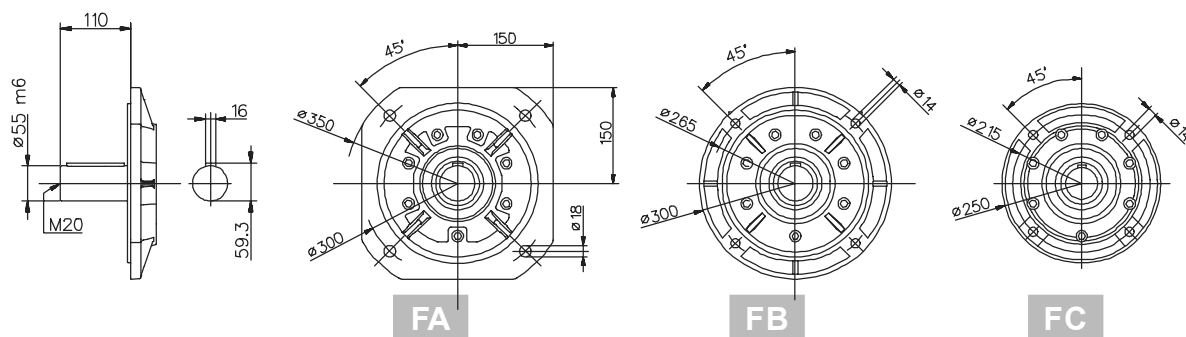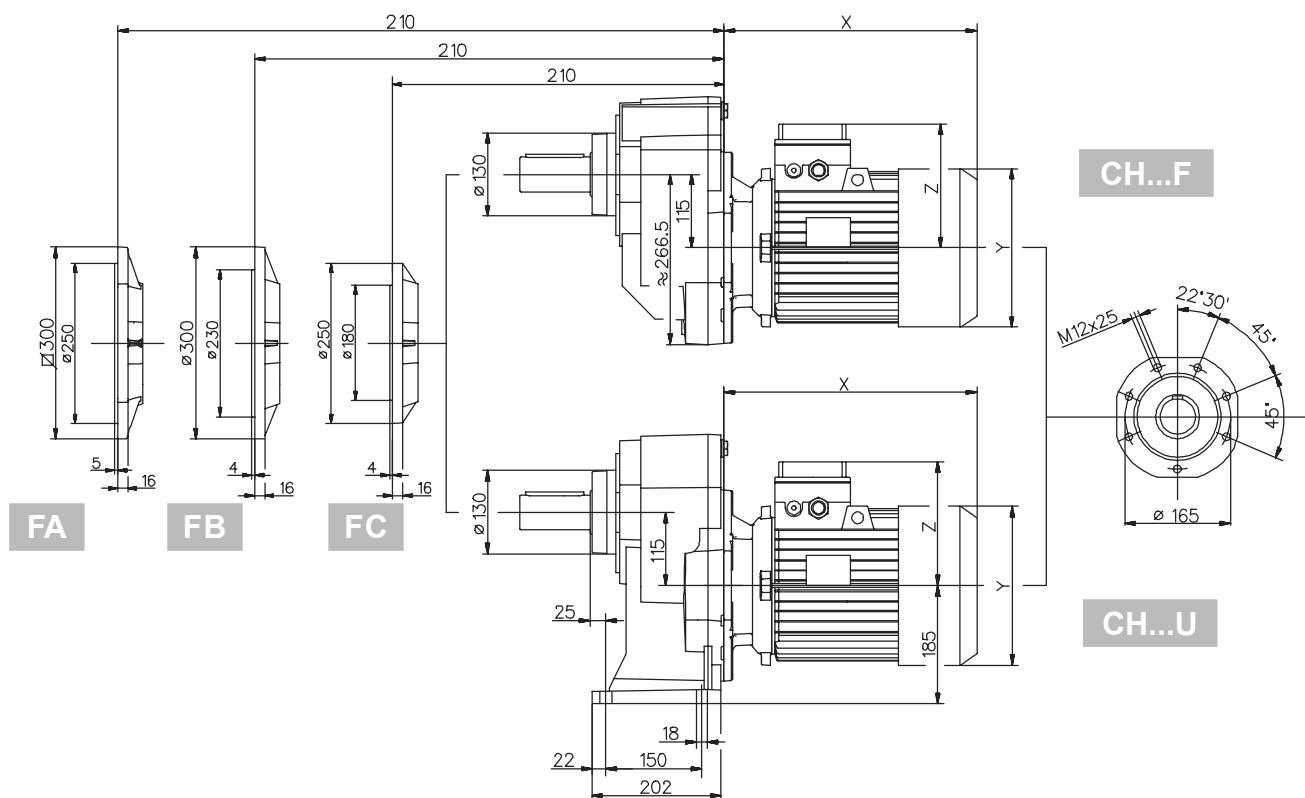





122/..3


Dimensions / 尺寸

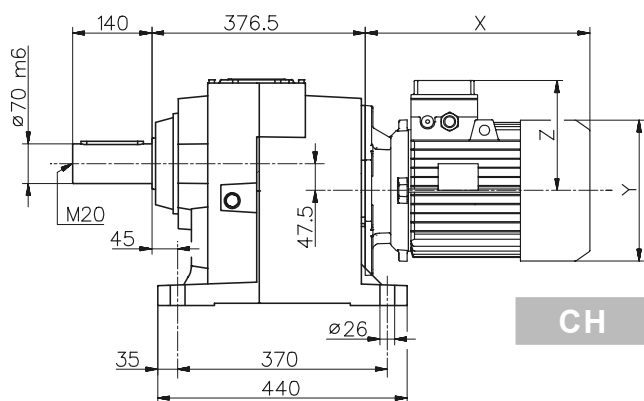


CH

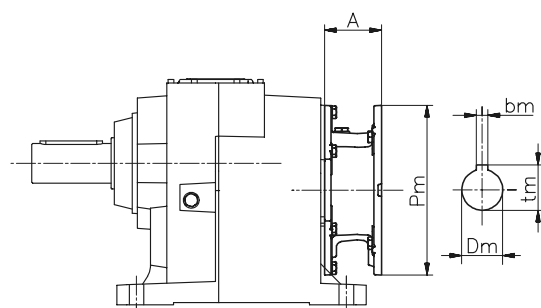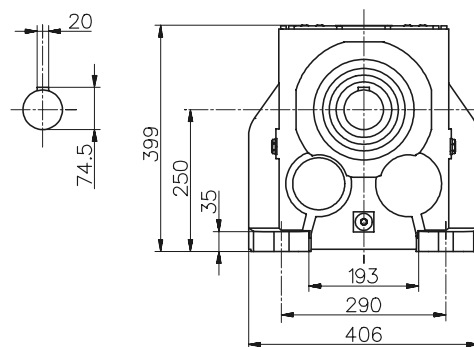


H

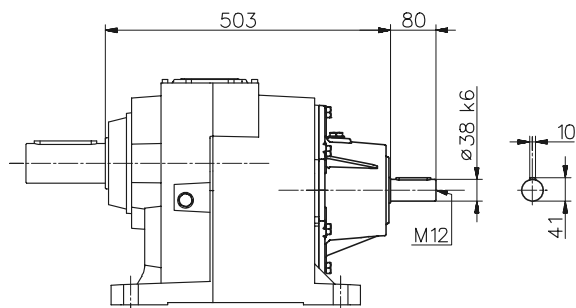

IH

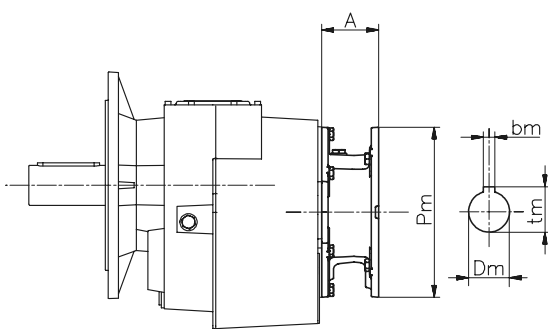

H...F FB






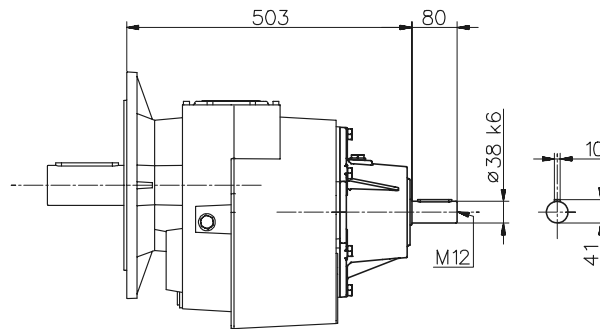


IH...F FB

125	IH	PAM		搭配标准马达尺寸				搭配刹车马达尺寸			
	~Kg	A	~Kg	X	Y	Z	~Kg	X	Y	Z	~Kg
100	116.3	76	108.7	325	191	139	122.5	407	191	139	128
112		76	108.7	347	211	150	132.5	443	211	150	142.2
132s		101	111.5	396	249	194	147.5	485	249	194	157.8
132m		101	111.5	434	249	194	156.5	537	249	194	171.2
160s		148	117.5	540	310	244	-	-	-	-	-
160l		148	117.5	584	310	244	-	-	-	-	-
180		148	117.5	641	349	260	-	-	-	-	-
200		185	132.5	-	-	-	-	-	-	-	-


For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.

关于没列出的尺寸，请参考CH/H的相关尺寸

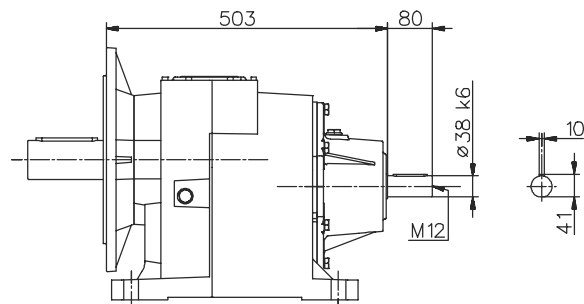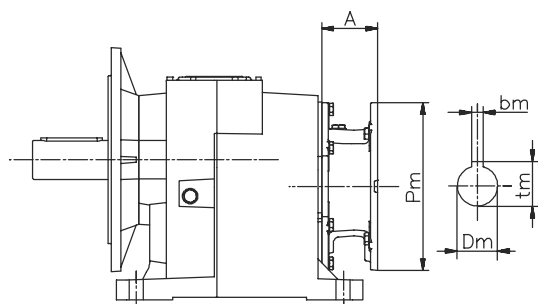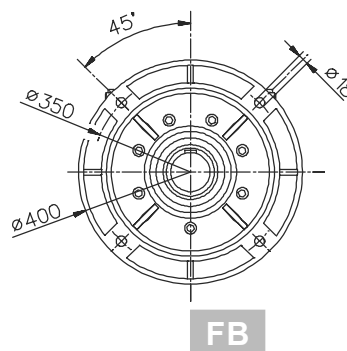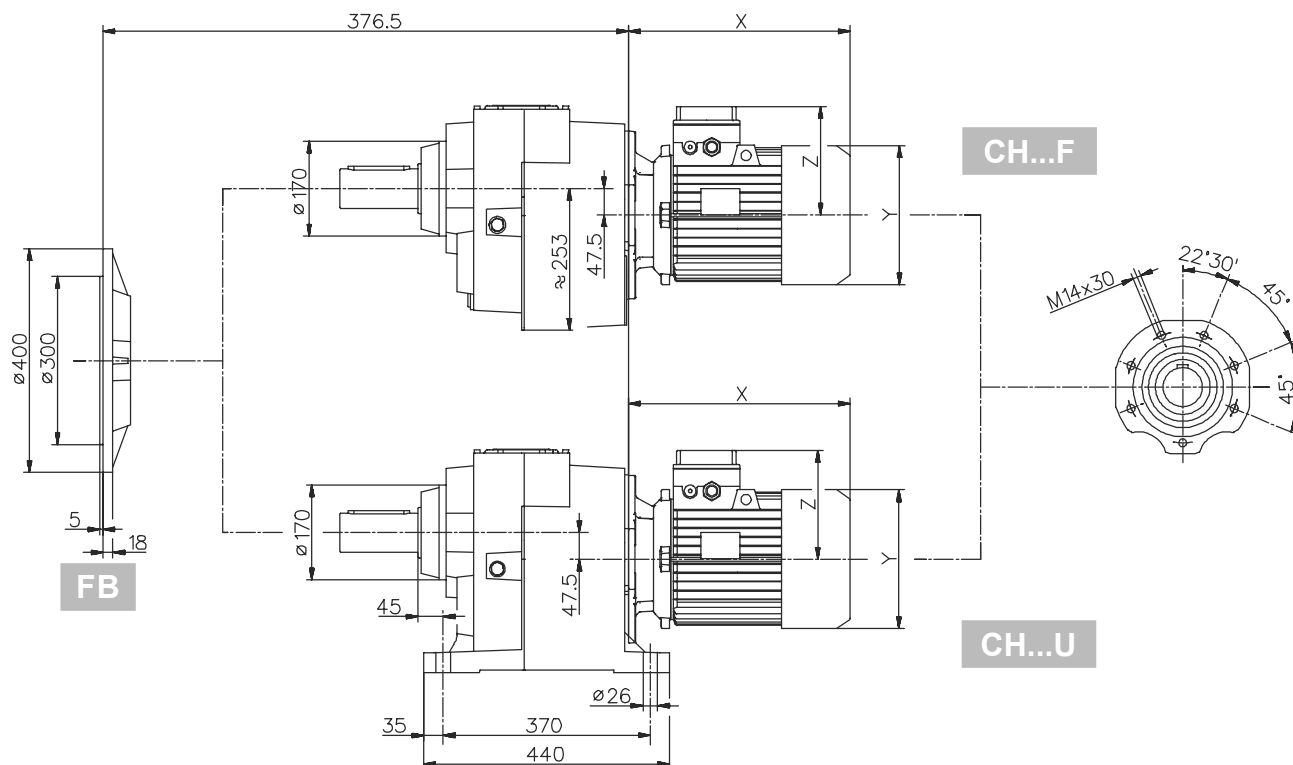


H...U FB

IH...U FB





142/..3


Dimensions / 尺寸

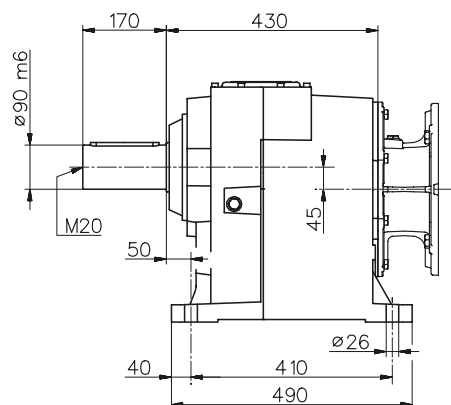


H

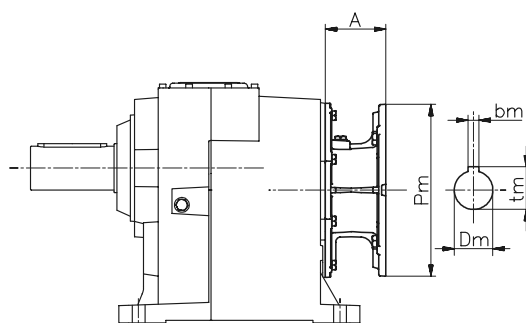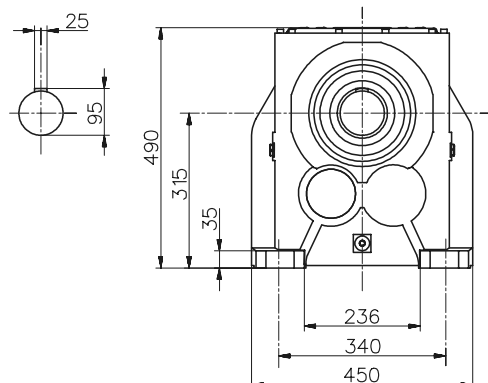


H

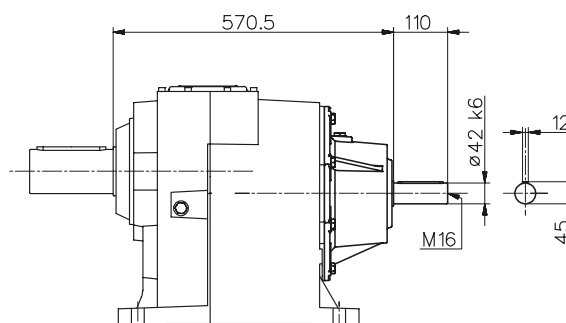

IH

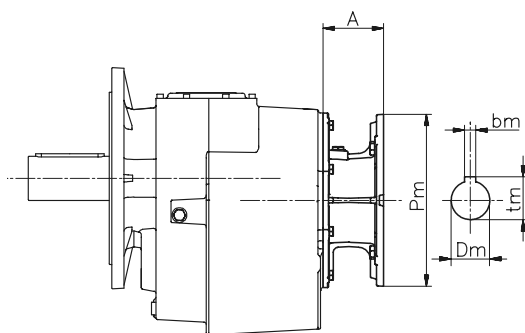


H...F FB-FC

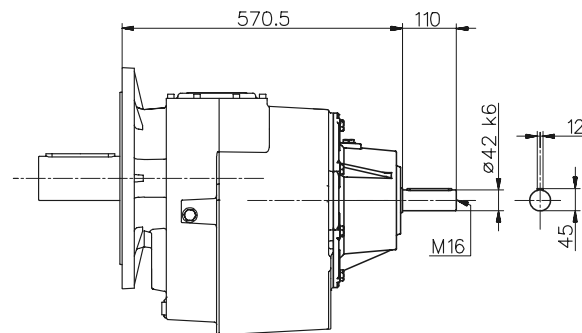

IH...F FB-FC







140	IH	PAM		搭配标准马达尺寸				搭配刹车马达尺寸			
	~Kg	A	~Kg	X	Y	Z	~Kg	X	Y	Z	~Kg
132s	191.7	76	176.6	-	-	-	-	-	-	-	-
132m		76	176.6	-	-	-	-	-	-	-	-
160s		124	184.5	-	-	-	-	-	-	-	-
160l		124	184.5	-	-	-	-	-	-	-	-
180		124	184.5	-	-	-	-	-	-	-	-
200		161	198.7	-	-	-	-	-	-	-	-
225		161	200.5	-	-	-	-	-	-	-	-

For the dimensions concerning the motor connection area (Pm, Dm, bm, tm) please refer to the table shown at page 134.
关于没列出的尺寸，请参考CH/H的相关尺寸




Dimensions / 尺寸

142/..3

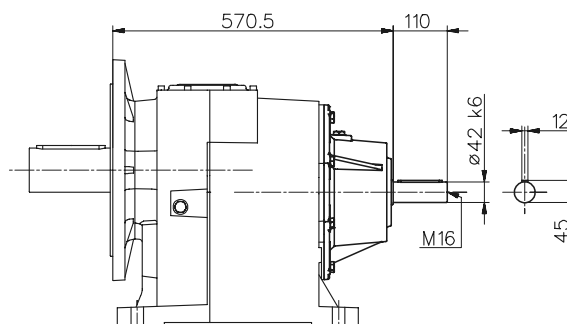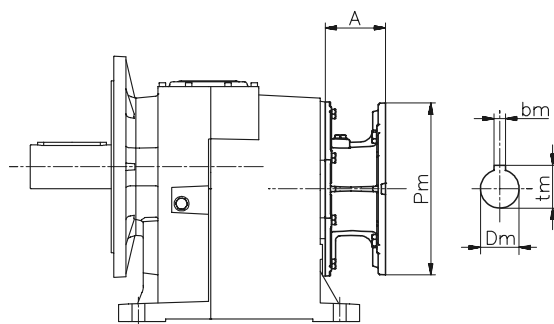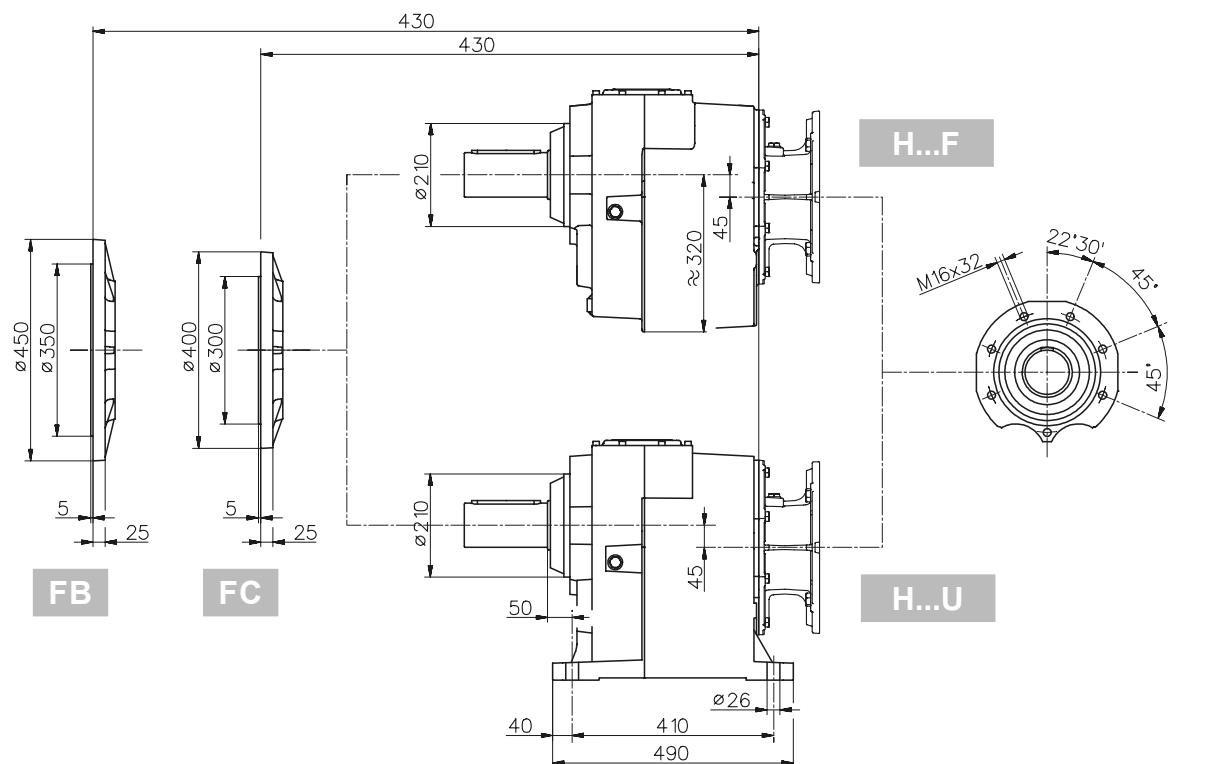


H...U FB-FC

IH...U FB-FC




PAM B5 Dimensions / 尺寸

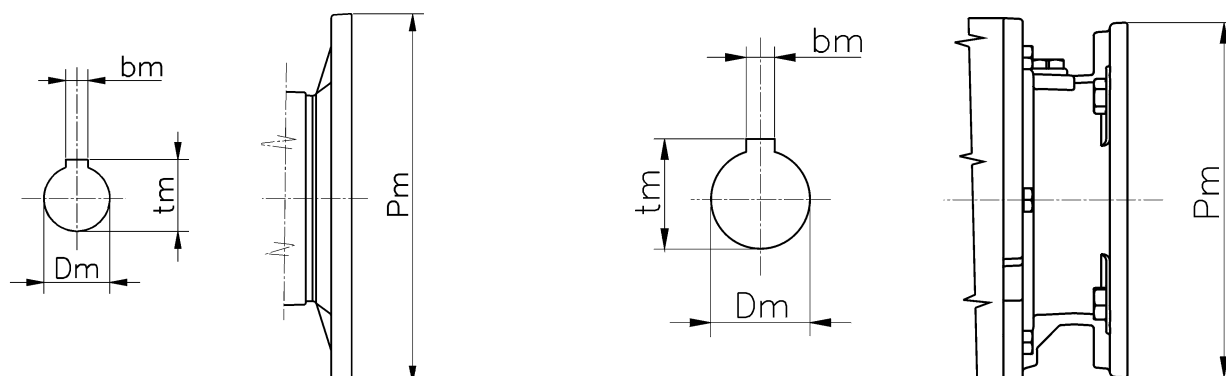

B5	IEC										
	063	071	080	090	100	112	132	160	180	200	225
Pm	140	160	200	200	250	250	300	350	350	400	450
Dm	11	14	19	24	28	28	38	42	48	55	60
bm	4	5	6	8	8	8	10	12	14	16	18
tm	12,8	16,3	21,8	27,3	31,3	31,3	41,3	45,3	51,8	59,3	64,4

PAM B14 / Dimensions / 尺寸

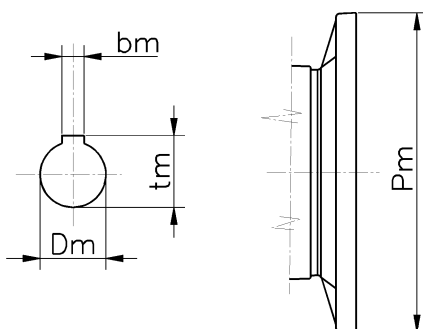

B14	IEC						
	056	063	071	080	090	100	112
Pm	80	90	105	120	140	160	160
Dm	9	11	14	19	24	28	28
bm	3	4	5	6	8	8	8
tm	10,4	12,8	16,3	21,8	27,3	31,3	31,3